MIL-T-13650A(Ord)
25 June 1958
SUPERSEDING
MIL-T-13650(Ord)
20 September 1954
MIL-P-11943
17 April 1952

MILITARY SPECIFICATION

TELESCOPE, M60A1C AND M60A1D

1. SCOPE

1.1 This specification covers two types of M60 Telescopes. The "C" and "D" designations refer to the reticle patterns. Both telescopes are used with System Sighting M7; the M60A1C is used for azimuth sighting and the M60A1D for elevation sighting.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on the date of invitation for bids, form a part of this specification:

SPECIFICATIONS

Federal

LLL-F-291	Fiberboard; Corrugated, Single Face (Flexible)
PPP-B-601	Boxes, Wood, Cleated-Plywood
PPP-B-621	Boxes, Wood, Nailed and Lock-Corner
PPP-B-636	Boxes, Fiber
PPP-B-676	Boxes, Set-up, Paperboard
PPP-C-843	Cushioning Material, Cellulosic
PPP-T-76	Tape, Pressure-Sensitive Adhesive, Paper, Water Resistant

Military

MIL-P-116	Preservation, Methods of
MIL-B-121	Barrier Material, Greaseproofed, Flexible (Waterproofed)

FSC 1240

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:58Z
Check the source to verify that this is the current version before use.

MIL-B-131	Barrier Material; Water Vaporproof, Flexible
MIL-D-3464	Desiccants, Activated, Bagged, Packaging Use and Static Dehumidification
MIL-O-13830	Optical Components for Fire Control Instruments: General Specification Governing the Manufacture, Assembly and Inspection of
MIL-F-13926	Fire Control Materiel: General Specification Governing the Manufacture and Inspection of
MIL-P-14232	Packaging of Parts, Spare Parts, Equipment and Tools for Weapons and Fire Control; General Specification for

STANDARDS

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	Marking for Shipment and Storage
MS 20003	Indicator-Humidity, Card, Three Spot, Impregnated Areas

DRAWINGS

Ordnance Corps

F7693946	Telescopes, M60A1C, M60A1D,

(Copies of specifications, standards, drawings and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer).

2.2 Other publications. - The following documents form a part of this specification. Unless otherwise specified, the issue in effect on date of invitation for bids shall apply.

CONSOLIDATED FREIGHT CLASSIFICATION RATINGS, RULES AND REGULATIONS

(Application for copies should be addressed to the Consolidated Freight Classification Committee, 202 Union Station, Chicago 6, Illinois).

NATIONAL MOTOR FREIGHT CLASSIFICATION No. A-2 and No. 13

(Application for copies should be addressed to the American Trucking Association, 1424 Sixteenth Street, N.W., Washington 6, D. C.).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:58Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Material. - Materials shall be as specified in the applicable drawings and specifications forming a part of this specification.

3.2 Eyepiece focus. - The reticle at the center of the field shall be in sharp focus when the eyepiece is set between -0.75 and -1.0 diopters. A calibrated dioptometer of at least 6 power, or an equivalent auxiliary telescope shall be used to make this setting.

3.3 Collimation. - The optical axis shall be perpendicular to axis of the cylindrical mounting surface and the locating lugs within a tolerance of 2 mils.

3.4 Parallax. - With the target at 900 yards plus or minus 100 yards the parallax in the center of the field shall not exceed 0.15 mils (approximately 1/2 reticle width).

3.5 Resolution. - The resolving power on the optical axis for a parallel-bar test target shall be 11 seconds of arc within ± 1/8 diopter.

3.6 Filters. - When placed in the optical path, filters shall not affect telescope definition.

3.7 Parallelism of image and reticle.

3.7.1 M60A1C. - With the telescope in a true vertical position, an imaginary line connecting the tops of the "5" graduations shall not deviate from the image of a level line by more than the angle subtended by 0.5 mil block measured at the top of one "5" graduation when the top of the other "5" graduation is in coincidence with the level line.

3.7.2 M60A1D. - With the telescope in a true vertical position the longest reticle line shall not deviate from the image of a level line by more than the angle subtended by 0.5 mil block measured at one end of the reticle line when the other end of the reticle line is in coincidence with the level line.

3.8 Reticle accuracy. - The angular values for the reticle graduations shall be as specified in the reticle drawings within 2 percent plus or minus 0.3 mil.

3.9 Image tilt. - The image of a plumb line shall be plumb within one degree of the vertical as measured by an auxiliary telescope in back of the eyepiece.

3.10 Vibration. - With the telescope mounted in its normal operating position, it shall not be damaged when it is vibrated in a vertical plane at a constant frequency

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:58Z
Check the source to verify that this is the current version before use.

of 30 cycles per second with an amplitude of 1/16" (1/8" total excursion) for a period of 2 to 2 1/2 minutes. Subsequent to vibration, the telescope shall meet all other requirements of this specification and the collimation shall not have changed, from value obtained in 3.3, by more than 0.2 mil.

3.11 Cleanliness. - Subsequent to vibration, the telescope shall meet the cleanliness requirements of Specification MIL-O-13830. There shall be not more than 2 particles of dirt visible on the surfaces of the reticle and each particle shall not be in excess of an area equivalent to a size 5 dig (.05 mm). There shall be no dirt on other surfaces which interfers with observation or adversely affects image quality.

3.12 Sealing. - The telescope shall show no evidence of leakage in excess of 0.1 psi when subjected to an external pressure of 5 psi gage pressure for a period of three (3) minutes. The telescope shall not be immersed in water to determine area of leakage.

3.13 Reticle illumination. - Reticle markings shall appear clearly defined when illuminated by Instrument Light M3 or equivalent and observed in a dark room.

3.14 Temperature. - Telescope shall show no evidence of damage and shall meet the performance requirements of this specification at room ambient temperature after having been exposed and thermally stabilized at temperatures of minus 62°C. (-80°F). and plus 71°C. (150°F).

3.15 Workmanship. - Workmanship shall be in accordance with the applicable workmanship requirements of Specifications MIL-F-13926 and MIL-O-13830.

4. QUALITY ASSURANCE PROVISIONS

4.1 General quality assurance provisions.

4.1.1 Contractor inspection. - Unless otherwise specified herein, the inspections required by this specification will be performed by the contractor.

4.1.2 Contractor quality assurance system. - The contractor shall provide and maintain an effective quality assurance system acceptable to the Government covering the supplies under this contract. Results of all examinations and tests performed under the quality assurance system shall be made available to the Government. A current written description of the system shall be submitted to the contracting officer prior to initiation of production. The written description will be considered acceptable when, as a minimum, it provides the quality assurance required by the specification and other documents referenced in this specification. The

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:58Z
Check the source to verify that this is the current version before use.

contractor will not be restricted to the inspection station or to the method of inspection listed provided that the substitute procedures will provide, as a minimum, the quality assurance required in the contractual documents. In cases of dispute as to whether certain procedures of the system provide equal assurance, the comparable procedure of this specification shall be used. The contractor shall notify the Government of, and obtain approval for, any change to the written procedure that affects the degree of assurance required by this specification or other documents referenced therein.

4.1.3 Government verification. - All quality assurance operations performed by the contractor will be subject to Government verification at unscheduled intervals. Verification will consist of surveillance of the operations to determine whether the practices, methods, and procedures of the written inspection plan are being properly applied, and Government product inspection to measure quality of product offered for acceptance. Deviation from the prescribed or agreed upon procedures, or instances of poor practices which might have an affect upon the quality of the product will immediately be called to the attention of the contractor. Failure of the contractor to promptly correct deficiencies discovered will be cause for suspension of acceptance until correction has been made or until conformance of product to prescribed criteria has been demonstrated. To avoid interference with operations, the contractor will designate a responsible official or officials to whom the Government inspector will report such instances.

4.2 Inspection provisions. - Applicable quality assurance provisions common to all fire control instruments as specified in Specifications MIL-O-13830 and MIL-F-13926 shall apply.

4.2.1 Lot formation. - Unless otherwise specified by the contracting officer, or his representative, inspection lot sizes and lot formation shall be in accordance with Standard MIL-STD-105.

4.2.2 Examination. - The classification of defects in Tables I, II and III shall constitute the minimum inspection requirements to be performed prior to acceptance.

4.2.2.1 All rejected lots shall be screened for all defective characteristics. After corrections have been made and the Government inspector informed of the corrected action taken, the lot shall be resubmitted for acceptance inspection as outlined in Standard MIL-STD-105.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:58Z
Check the source to verify that this is the current version before use.

TABLE I - CLASSIFICATION OF DEFECTS
(Use Inspection Level II, and Sampling Plan Table IV-A of Standard MIL-STD-105)

Major AQL 6.5	Req. Par.	Q.A. Par.	Test Method
1. Eyepiece focus	3.2	4.3.13	DST
2. Collimation	3.3	4.3.6	DST
3. Resolution	3.5	4.3.12	DST
4. Parallelism of image and reticle (M60A1C)	3.7.1	4.3.11	DST
5. Parallelism of image and reticle (M60A1D)	3.7.2	4.3.11	DST
6. Parallax	3.4	4.3.14	Visual
7. Image tilt	3.9	4.3.9	DST
8. Reticle shift	3.10	4.3.8	DST
9. Workmanship	3.15	4.3.18	Visual
Minor AQL 1.0			
41. Sealing	3.12	4.3.16	SME
42. Reticle illumination	3.13	4.3.15	SME
43. Cleanliness	3.11	4.3.7	Visual
44. Reticle accuracy	3.8	4.3.10	DST

TABLE II - CLASSIFICATION OF DEFECTS
(Use Inspection Level L6, and Sampling Plan Table V of Standard MIL-STD-105)

Major AQL 1.5	Req. Par.	Q.A. Par.	Test Method
1. Vibration	3.10	4.3.7	SME
2. Temperature	3.14	4.3.17	SME

TABLE III - CLASSIFICATION OF DEFECTS
(Use Inspection Level II, and Sampling Plan Table IV-A of Standard MIL-STD-105)

Major AQL 1.0	Req. Par.	Test Method
1. Improper cleaned optics (Levels A & C)	5.1.1.1 5.1.2.1	Visual
2. Improper mobilization of eye shield (Levels A & C)	5.1.1.2.1 5.1.1.2.2	Visual
3. Improper quantity of desiccant (Level A)	5.1.1.2.4	Visual
4. Improper securing of humidity (Level A)	5.1.1.2.6	Visual
5. Improper mobilization (Levels A & B)	5.2.1; 5.2.2	Visual

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:58Z
Check the source to verify that this is the current version before use.

TABLE III - CLASSIFICATION OF DEFECTS (cont'd)

Major AQL 1.0	Req. Par.	Test Method
6. Improper quantity of units in a shipping container (Levels A & B)	5.2.1 5.2.2	Visual
7. Improper markings (Levels A, B & C)	5.3	Visual
8. Improper unit packaging (Level A)	5.1.1.2	Visual
Minor AQL 2.5		
41. Improper protective wrapping (Level A)	5.1.1.2.2	Visual
42. Improper securing with tape (Level A)	5.1.1.2.2 5.1.1.2.3	Visual
43. Improper cushion (Level A)	5.1.1.2.3	Visual
44. Improper bag (Level A)	5.1.1.2.5	Visual
45. Improper immobilization (Level A)	5.1.1.2.8	Visual
46. Improper sealing (Level A)	5.1.1.2.8	Visual

TABLE IV - LIST OF CHARACTERISTICS FOR PILOT PACK ONLY

Characteristic	Req. Par.	Q.A. Par.	Test Method
Quick leak (Level A)	5.1.1.2.7	4.3.19	Visual
Heat seal (Level A)	5.1.1.2.7	4.3.19	Visual

4.2.3 Inspection equipment. - The test methods and procedures outlined in 4.3 shall be used as standards for determining the adequacy of the contractor's inspection equipment and methods utilized for inspecting the characteristics in Tables I, II and III. Unless otherwise specified in the contract, the contractor shall provide and maintain gages and other measuring and testing devices considered necessary for inspection of supplies for conformance to contracted requirements. The Government reserves the right to certify all such equipment and to use this equipment for Government verification inspection.

4.3 Test methods and procedures.

4.3.1 Target, Figure 1, is used in conjunction with a special testing device and a viewing dioptometer collimating telescope, and is used to facilitate checking the requirements for collimation, reticle movement, parallelism of image and reticle, reticle accuracy, and image tilt; and when in use, is placed 50 feet from the telescope's objective lens.

4.3.1.1 This target is provided with an elevation line and a plumb line for

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:58Z
Check the source to verify that this is the current version before use.

positioning the target to a collimating telescope that must be used to align the target to the device special testing. Target Point "A" represents the collimator's optical axis, and is located Y inches from the Target Line "B", and X inches from the Target Line "V", and will be common for any target distance. Both X and Y distances represent the horizontal and vertical displacement between the optical axis of the collimating telescope and the optical axis of the eyepiece objective end of the telescope under test.

4.3.1.2 Point "R" represents where the dioptometer's optical axis will fall when the dioptometer is properly positioned in the special testing device and also represents the location of the eyepiece's optical axis.

4.3.1.3 Point "P" represents where the optical axis of the objective end of the telescope will fall, with respect to the eyepiece's optical, when the telescope is properly secured in the testing device. The vertical displacement of 12.100" will be common for any target distance.

4.3.1.4 A series of concentric circles are constructed about Point "P", the radii of which are in increments of .5 mils are used to facilitate determining collimation accuracy and to determine the extent of reticle movement after vibration. All radii will vary with the target distance selected.

4.3.1.5 Target Lines A to J, inclusive, represent where each reticle graduation (M60A1C); and Target Range Lines C to 45, inclusive, represent where each graduation of the M60A1D Reticle will fall when the center reticle line is in coincidence with Point "P". Tolerance lines are provided to determine reticle accuracies. The positioning of the target line and the spacing of all tolerance lines will increase or decrease as the target distance increases or decreases.

4.3.1.6 Two sets of mil blocks are provided at each end of Line C and are used to determine parallelism of image and reticle. Both mil blocks will increase or decrease with respect to the selected target distance.

4.3.1.7 Two sets of angular lines are provided to determine the extent of image tilt and remain common for any selected target distance.

4.3.2 The device, special testing, used to secure the telescope under test must provide a means for securing a dioptometer collimating telescope, to optical axis of which is in coincidence with the telescope's eyepiece optical axis. It must also provide for a support to hold a collimating telescope for aligning the fixture and target to a plumb line. The fixture must also be equipped with leveling pads and leveling adjustments for leveling the fixture.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:58Z
Check the source to verify that this is the current version before use.

4.3.3 The collimating telescope used to align the fixture and target will be the standard 4-power fixed focus eyepiece type having a cross reticle. A peep sight will be required to reduce parallax at a target distance of 50 feet.

4.3.4 The dioptometer collimating telescope used as an auxiliary telescope will have an adjustable eyepiece assembly of 6-power and a diopter scale for reading dioptic measurements. Prior to using this telescope, the eyepiece assembly must be adjusted to the reticle to suit the user's eye, and shall be free of parallax when viewing a target at the non-parallax distance. When parallax is removed, the diopter scale is then set to zero diopters. A peep sight must be used to reduce parallax when viewing a target at 50 feet.

4.3.5 Prior to performing any test, the target and fixture must be aligned to a plumb line. This alignment is accomplished by sighting through the collimating telescope toward a plumb line hanging a few feet short of the target distance. Coincide the vertical line of the collimator reticle, while properly positioned in the testing device, to the plumb line. When this coincidence is obtained, coincide target plumb line to the previously coincided vertical reticle line and target plumb line; and without disturbing this coincidence, coincide the target elevation line to the collimator's vertical line. When all lines are in coincidence, the collimator's optical axis will fall upon Target Point "A".

4.3.5.1 Align the horizontal and vertical line of the dioptometer collimating telescope's reticle by the means provided. When this alignment is obtained, the dioptometer's optical axis will fall upon Target Point "R". At this point, the target and dioptometer will be aligned with the plumb line.

4.3.6 The first test to be performed will be the collimation test. With the telescope under test properly secured to the testing device by the means provided, sight through the telescope and observe where the optical axis of the telescope falls upon the target circle. Proper collimation is assured when the telescope's optical axis falls within the confines of the circles. Record this position. It should be noted that in Telescope M60A1C, the optical axis will be considered as the top of the center reticle line; and when testing Telescope M60A1D, the optical axis will be considered as the mid-point of the zero range line. When performing this test, the dioptometer collimating telescope will not be used.

4.3.7 After the telescope has been accepted for collimation test, it shall be immediately subjected to vibration test. This test will be performed on a machine capable of producing a motion at a frequency and at an amplitude specified in 3.10. The actual vibration test will be performed by mounting the telescope(s) in a vertical position by means of an adapter. The length of vibration shall be as specified in 3.10. Upon completion of the vibration test, the telescope shall be tested for cleanliness by using the shadowing method outlined in Specification MIL-O-13830. Dirt particles shall not exceed the quantity specified in 3.11.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:58Z
Check the source to verify that this is the current version before use.

4.3.8 After acceptance of the cleanliness test, the telescope shall be re-collimated as outlined above; reticle movement shall not exceed that required in 3.10.

4.3.9 Image tilt will be tested using the dioptometer collimating telescope aligned to the optical axis as specified above. In order to perform this test, the inspector will construct an imaginary line across the top of the reticle graduation of the M60A1C Reticle; and when checking image tilt in the M60A1D, the inspector will use the zero range line of the reticle. The actual test is performed by observing the angle of tilt, if any, between the horizontal reticle line of the dioptometer with respect to the image of target line "C". The extent of image tilt shall not exceed angular lines of the target in order to conform with the requirements of 3.9.

4.3.10 Reticle accuracy can be accomplished by coinciding the telescope's optical axis (M60A1C) to Target Point "P", and observing where the remaining reticle graduations fall with respect to Target Lines "A" to "J", inclusive. Reticle graduations will be considered acceptable when all reticle lines fall within the vertical tolerance lines shown on the target. When checking reticle accuracy of the M60A1D Telescope, the same procedure will be followed, except all reticle range lines must fall within the confines of their horizontal tolerance lines shown on the target. In either case, if the reticle lines fail to exceed the tolerance lines, then the requirements of 3.8 has been met.

4.3.11 Parallelism of image and reticle will be checked by observing coincidence between the imaginary line mentioned above when checking the M60A1C, or the zero range line when checking the M60A1D, and target mil block shown on the target. This test is accomplished by loosening the telescope and coinciding one end of the above-mentioned lines, the extent of inclination at the opposite end of the line shall not exceed the limits of the target mil blocks in order to conform with the requirements of 3.7.1 and/or 3.7.2.

4.3.12 Definition test will be accomplished by using the latest definition target referenced in Specification MIL-O-13830. The target is constructed using the No. 28 test bar pattern of the National Bureau Standard Test Chart, and when in use is placed 55 feet from the objective assembly of the telescope under test; the bars and spaces will subtend the angle specified in 3.5 when placed at the distance specified above. Centrally located in this target is the Figure 3 used to facilitate aligning the telescope's optical axis to the target. Before the test can be performed, the optical axis must be aligned to the 3 by moving the telescope to obtain coincidence. During this test, a six-power dioptometer aligned to the telescope's optical axis will be used to determine definition. The definition pattern must be resolved in the four (4) meridians within an adjustment of the dioptometer specified in 3.5.

4.3.13 Eyepiece focus will be tested using a dioptometer collimating telescope, having the proper eyepiece focus and set at the parallax distance aligned to the telescope's optical axis (described above). The actual test is made by focusing the objec-

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:58Z
Check the source to verify that this is the current version before use.

tive assembly of the dioptometer until a clear, sharp image of the reticle of the telescope is clearly defined. The diopter reading shall conform with the requirements of 3.2.

4.3.14 Checking for parallax is accomplished by sighting through the telescope under test at a target image, the distance of which will be as specified in 3.4. The target image for this test will be considered as any well-defined target such as a bill board, smoke stack, etc. The actual test is performed by sighting through the telescope and aligning one of the reticle graduations near the center of the field of view close to, but not touching, the target. Parallax will be observed as a displacement between this selected reticle line and the parallax target when the head is moved from side to side (M60A1C) or when the head is moved up or down (M60A1D).

4.3.15 Reticle illumination will be tested by connecting any 3-volt source to the appropriate slot. The test is accomplished by covering the window and observing clearness of the reticle graduations. All graduations and figures shall appear well defined.

4.3.16 Sealing testing will be accomplished using an approved testing device, and shall be externally pressure-tested for conformance to the requirements of 3.12.

4.3.17 Temperature test. - The test equipment to be utilized when performing the temperature test, unless otherwise specified, shall be such that the equipment under test shall not exceed 50 percent of the internal volume of the test chamber, and no portion shall be closer than six inches from any surface of the chamber. The equipment being tested shall be installed in the chamber in a manner similar to its actual use in service. The telescope under test shall be placed in the test chamber, and the temperature shall be thermally stabilized in accordance with 3.14. Upon completion of the test, the unit under test shall be inspected to determine conformance with the requirements specified in 3.14.

4.3.18 Workmanship. - Workmanship shall conform to the requirement outlined in Specifications MIL-O-13830 and MIL-F-13926.

4.3.19 Packaging. -The inspection procedures and methods outlined in Section 4 of Specification MIL-P-116 shall be used when performing acceptance inspection of the characteristics listed in Table III, Sampling plans, AQL values, and inspection levels listed in Specification MIL-P-116 shall be omitted.

4.4 Inspection of components and subassemblies. - Components and subassemblies shall be inspected in accordance with Table V. The acceptance and rejection

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:58Z
Check the source to verify that this is the current version before use.

numbers are expressed in terms of defective units. One or more defects on any unit shall constitute a defective unit. The sampling plans listed in Table V are not intended to preclude 100% inspection by the contractor if the contractor so desires.

TABLE V

SAMPLING PLANS FOR COMPONENTS & SUBASSEMBLIES

Lot Size (inclusive)	Sample Size	Accept Lot	Reject Lot
0-25	100% Inspection	0	1
26-35	20	0	1
36-50	25	0	1
51-150	30	0	1
151-over	30	1	2

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging.

5.1.1 Level A.

5.1.1.1 Cleaning. - If the telescope is received in the packaging area with the optics covered, it may be assumed that cleaning has already been performed by competent optical personnel. Otherwise, cleaning shall be accomplished as specified in Specification MIL-P-14232.

5.1.1.2 Unit packaging. - The telescope shall be packaged Method IIc in accordance with Specification MIL-P-116 and as specified herein.

5.1.1.2.1 Eyeshield. - The rubber eyeshield shall be immobilized, so as not to become deformed, in a set-up paperboard box conforming to Specification PPP-B-676, type I.

5.1.1.2.2 Protective wrap. - Covered optical parts shall be further protected by covering or wrapping with barrier material conforming to Specification MIL-B-121, grade A, class 1. The wrap shall be secured with pressure sensitive tape.

5.1.1.2.3 Cushion wrap. - The telescope shall be wrapped with cellulosic cushioning material conforming to Specification PPP-C-843, type III, class B. The wrap shall be secured with pressure sensitive tape.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:58Z
Check the source to verify that this is the current version before use.

5.1.1.2.4 Desiccant. -The required units of desiccant conforming to Specification MIL-D-3464 shall be secured to the assembly.

5.1.1.2.5 Barrier bag. - The telescope shall be placed in a bag fabricated of material conforming to Specification MIL-B-131, class 1.

5.1.1.2.6 Humidity indicator. - A humidity indicator conforming to Standard MS 20003 shall be secured to the telescope at the bag opening.

5.1.1.2.7 Closure of barrier. -The barrier bag shall be closed by heat sealing. Excess entrapped air shall be exhausted prior to final closure.

5.1.1.2.8 Immobilizing in fiberboard box. - The bagged item and the paperboard box containing the eyeshield shall be collectively wrapped in single face flexible corrugated fiberboard conforming to Specification LLL-F-291 and immobilized in a fiberboard box conforming to Specification PPP-B-636, class 2, W5c, style RSC. The fiberboard box shall be sealed with tape conforming to Specification PPP-T-76.

5.1.2 Level C.

5.1.2.1 Cleaning. - Cleaning shall be as specified in 5.1.1.1.

5.1.2.2 Unit packaging. - The telescope shall be packaged Method IA-8, in accordance with Specification MIL-P-116. Packaging shall be similar to 5.1.1.2 except that desiccant and humidity indicator shall be omitted.

5.2 Packing.

5.2.1 Level A. - A quantity of packaged units shall be immobilized in a shipping container conforming to either of the following specifications:

PPP-B-601, overseas type
PPP-B-621, class 2

The gross weight of the shipping container shall not exceed 200 pounds.

5.2.2 Level B. - A quantity of packaged units shall be immobilized in a shipping container conforming to either of the following specifications:

PPP-B-601, domestic type
PPP-B-621, class 1

The gross weight of the shipping container shall not exceed 200 pounds.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:58Z
Check the source to verify that this is the current version before use.

5.2.3 Level C. - Packaged units shall be protected from damage by packing in conformance with Consolidated Freight Classification Rules and Container Specifications for Rail Shipment or with National Motor Freight Classification Rules and Container Specifications for Truck Shipment.

5.3 Marking. - Unit packages and shipping containers shall be marked in accordance with the requirements of Standard MIL-STD-129.

5.4 Pilot pack. - Prior to quantity packaging, a pilot pack, consisting of a complete and packed shipping container, shall be inspected to determine conformance with the requirements of this specification.

5.5 Workmanship. - Adequate controls shall be utilized to check for contamination of cleaning solvents and preservatives. Wraps shall be neat, conforming and firmly secured. Tape shall be uniformly applied to interior boxes and shall completely cover and adhere to all joints and seams. Shipping containers shall be free of protruding staples, screws, nails, etc. Strapping shall be applied just prior to shipment and shall not cover any container marking. Irrelevant marking shall be neatly obliterated. Visual observation shall indicate that the application of specified materials and methods are practical and will not result in packaging or packing deficiencies.

6. NOTES

6.1 Ordering data. - Procurement documents should specify the following:

(a) Title, number and date of this specification.
(b) Applicable stock number.
(c) Level of protection required.

6.2 Definitions.

6.2.1 Device, special testing (DST). - Special testing devices are designed to check function of an assembled unit.

6.2.2 Standard measuring equipment (SME). - Standard measuring equipment (SME) includes the common hand type measuring devices which are usually stocked by commercial supply houses for ready supply (shelf items), and which are normally used by an inspector to perform dimensional inspection of items under procurement. This category also includes commercial testing equipment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:58Z
Check the source to verify that this is the current version before use.

NOTICE: This specification, together with specifications and drawings pertaining to it and bearing a "Notice" of similar restrictions, is intended for use only in connection with procurement by the United States Government; and shall not be reproduced either wholly or in part except when authorized in connection with Government procurement, nor be used for any other purpose except when specifically authorized by the Chief of Ordnance, Department of the Army.

Custodian:

Army - Ordnance Corps

Preparing Activity:

Army - Ordnance Corps

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:58Z
Check the source to verify that this is the current version before use.

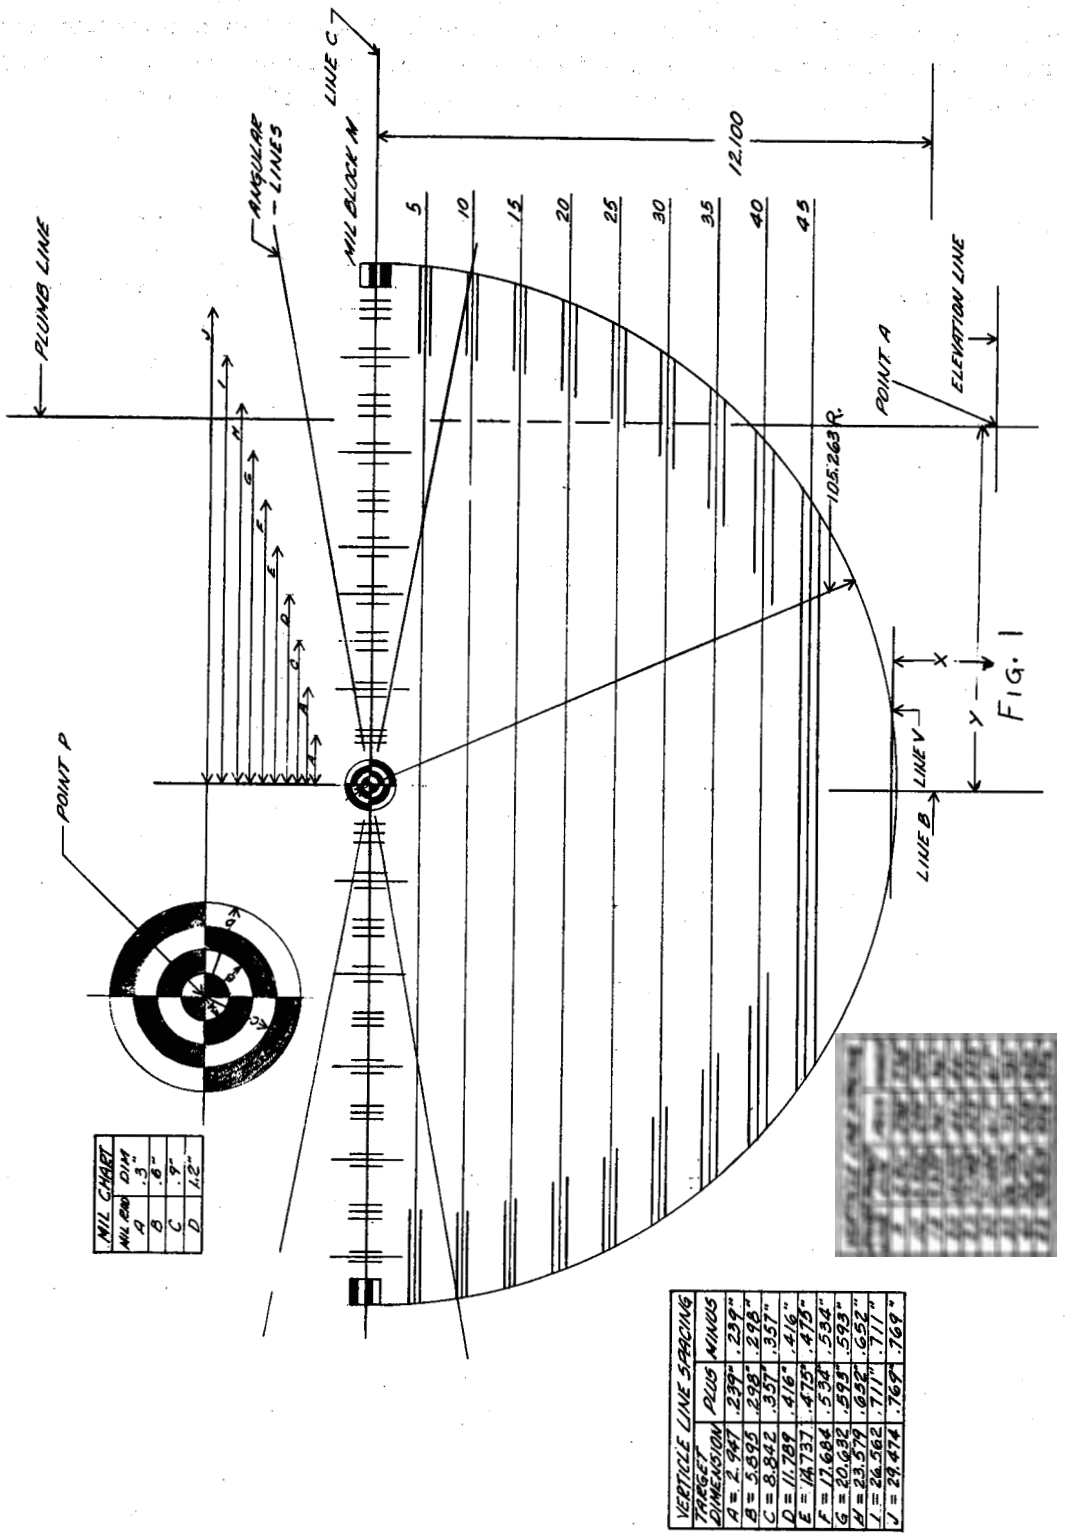


FIG. 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:58Z
Check the source to verify that this is the current version before use.