
AN102501 THRU AN102600

FED. SUP. CLASS. 5306

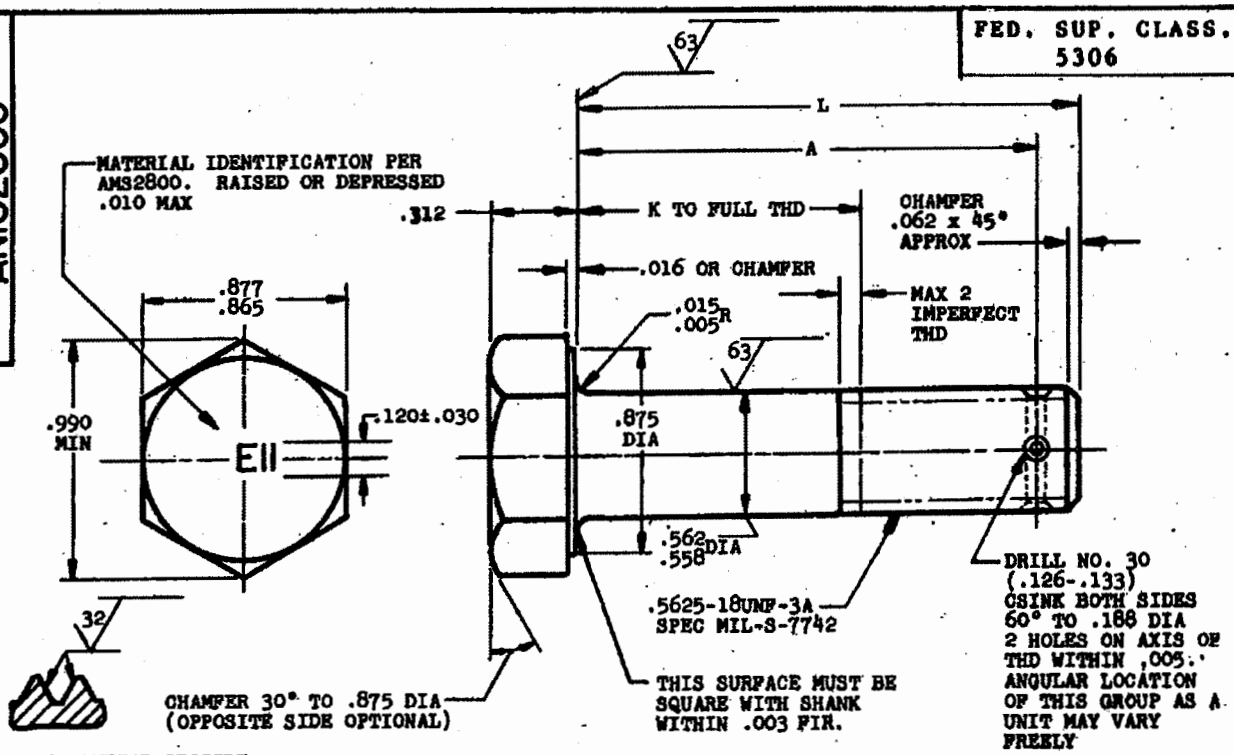

SECTION THRU THREAD PROFILE

L	A	K +.000 -.060	PART NO.	L	A	K +.000 -.060	PART NO.	L	A	K +.000 -.060	PART NO.
				2.500	2.340	1.562	AN102524	5.125	4.965	4.188	AN102545
				2.625	2.465	1.688	AN102525	5.250	5.090	4.132	AN102546
				2.750	2.590	1.812	AN102526	5.375	5.215	4.438	AN102547
1.062	.902	.125	AN102506	2.875	2.715	1.938	AN102527	5.500	5.340	4.562	AN102548
1.125	.965	.188	AN102507	3.000	2.840	2.062	AN102528	5.625	5.465	4.688	AN102549
1.188	1.028	.259	AN102508	3.125	2.965	2.188	AN102529	5.750	5.590	4.812	AN102550
1.250	1.090	.312	AN102509	3.250	3.090	2.312	AN102530	5.875	5.715	4.938	AN102551
1.312	1.152	.375	AN102510	3.375	3.215	2.438	AN102531	6.000	5.840	5.062	AN102552
1.375	1.215	.438	AN102511	3.500	3.340	2.562	AN102532				
1.438	1.278	.500	AN102512	3.625	3.465	2.688	AN102533				
1.500	1.340	.562	AN102513	3.750	3.590	2.812	AN102534				
1.562	1.402	.625	AN102514	3.875	3.715	2.938	AN102535				
1.625	1.465	.688	AN102515	4.000	3.840	3.062	AN102536				
1.688	1.528	.750	AN102516	4.125	3.965	3.188	AN102537				
1.750	1.590	.812	AN102517	4.250	4.090	3.312	AN102538				
1.812	1.652	.875	AN102518	4.375	4.215	3.438	AN102539				
1.875	1.715	.938	AN102519	4.500	4.340	3.562	AN102540				
2.000	1.840	1.062	AN102520	4.625	4.465	3.688	AN102541				
2.125	1.965	1.188	AN102521	4.750	4.590	3.812	AN102542				
2.250	2.090	1.312	AN102522	4.875	4.715	3.938	AN102543				
2.375	2.215	1.438	AN102523	5.000	4.840	4.062	AN102544				

NOTE: (1) SHANK SHALL BE STRAIGHT WITHIN .002 FIR. PER INCH OF BOLT LENGTH.
(2) THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR.
(3) THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND HEXAGON SHALL BE WITHIN .026 FIR.

MATERIAL: STEEL AMS6322
HARDNESS: ROCKWELL C26-32
FINISH: CADMIUM PLATE AMS2400
SURFACE ROUGHNESS: AS107
MANUFACTURING SPECIFICATION: AMS7452
(3) INSPECTION: ALL PARTS SHALL UNDERGO MAGNETIC INSPECTION IN ACCORDANCE WITH AMS2640

BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES; LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±2°.
DO NOT USE UNASSIGNED PART NUMBERS.

INACTIVE FOR NEW DESIGN AFTER 3 MARCH 1969 NO SUPERSEDING STANDARD.

THIS STANDARD WAS DEVELOPED COOPERATIVELY BY THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED 8 June 49 REVISED (1) 31 Aug 54 (2) 3 Mar 69 (3) 30 June 1986

P.A. AF-11 CUST. NAVY-AS ARMY-AV	AIR FORCE-NAVY AERONAUTICAL STANDARD BOLT - HEX HEAD, DRILLED SHANK, .5625-18	AN102501 THRU AN102600

Project No. 5306-1010

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

NOTICE: When Government drawings specifications or other data are used for any purpose other than in connection with a definitely related Government procurement operation the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated furnished or in any way supplied the said drawings specifications or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation or conveying any rights or permission to manufacture use or sell any patented invention that may in any way be related thereto.

NOTE: This drawing was approved by joint action of the Air Force and Navy Departments as the Air Force-Navy standard for this product. This drawing supersedes all antecedent standard drawings for the same product and shall be used for the procurement of aeronautical supplies or for use in new designs not later than 6 months after the latest date of approval shown.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:24Z
Check the source to verify that this is the current version before use.