
FED. SUP CLASS
5310

AN121526 THRU AN121550

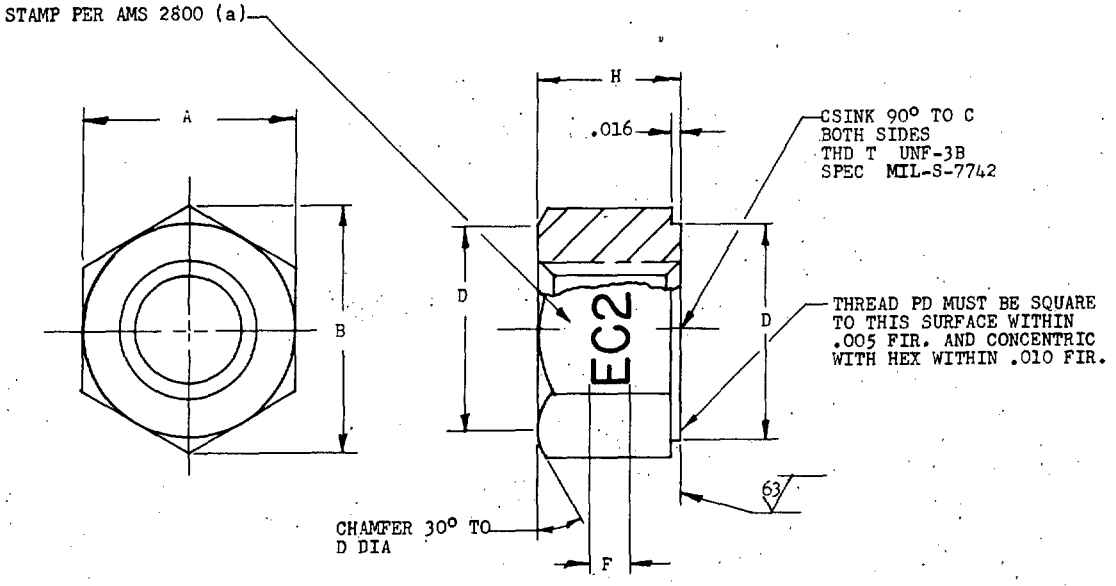

THD T	A MIN	A MAX	B MIN	C	D	F		H	APPROX WT LBS/100	PART NO.
.190(NO.10)-32	.367	.376	.419	.200	.375	.060	±.020	.156	0.50	AN121526
.250-28	.430	.439	.491	.260	.438	.060	±.020	.219	0.71	AN121527
.3125-24	.492	.502	.561	.322	.500	.120	±.030	.266	1.00	AN121528
.375-24	.553	.564	.633	.385	.562	.120	±.030	.328	1.65	AN121529
(b).4375-20	.616	.627	.703	.448	.625	.120	±.030	.375	2.20	AN121530
.500-20	.741	.752	.846	.510	.750	.120	±.030	.438	3.70	AN121531
.5625-18	.865	.877	.987	.572	.875	.120	±.030	.484	6.10	AN121532
.625-18	.928	.940	1.059	.635	.938	.120	±.030	.547	7.50	AN121533
.750-16	1.052	1.064	1.200	.760	1.062	.120	±.030	.656	10.80	AN121534
.875-14	1.239	1.252	1.414	.885	1.250	.120	±.030	.766	13.90	AN121535
1.000-12	1.427	1.440	1.628	1.010	1.438	.120	±.030	.875	17.00	AN121536
.4375-20	.679	.690	.775	.448	.688	.120	±.030	.375	2.40	AN121537

(a) IN MULTIPLE MARKING OF BAR STOCK, DUPLICATION OF WHOLE OR PART OF SYMBOL OR, OFFSET OF SYMBOL SUCH THAT UPPER PORTION APPEARS BELOW LOWER PORTION ON FINISHED PART IS PERMISSIBLE PROVIDED POSITIVE IDENTIFICATION IS SHOWN. PART MUST BE MARKED BEFORE THREADING.

MATERIAL: CORROSION RESISTANT STEEL AMS 5628

SURFACE ROUGHNESS: AS 107

CLEANING: FINISHED PARTS SHALL BE DEGREASED AND IMMERSED FOR NOT LESS THAN 20 MINUTES IN A SOLUTION OF 1 VOLUME OF NITRIC ACID (SP GR 1.42) AND 9 VOLUMES OF WATER AT ROOM TEMPERATURE.

PARTS SUBJECT TO MAGNETIC INSPECTION PER AMS 2640.

BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.

DIMENSIONS IN INCHES, UNLESS OTHERWISE SPECIFIED: TOLERANCES; LINEAR DIMENSIONS ±.010 ANGULAR DIMENSIONS ± 5°.

DO NOT USE UNASSIGNED PART NUMBERS.

② **INACTIVE FOR DESIGN** AFTER 21 Dec 1964. USE MS9356. INTERCHANGEABILITY RELATIONSHIP: MS9356 PARTS CAN UNIVERSALLY REPLACE THE INACTIVATED AN PARTS OF THE SAME THREAD SIZE; BUT THE INACTIVATED AN PARTS CANNOT ALWAYS REPLACE THE SUPERSEDING MS9356 PARTS.

APPROVED 7 NOV 49 REVISED ② 25 Mar 55 ② 21 Dec 64

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

NOTE: This drawing was approved by joint action of the Air Force and Navy Departments as the Air Force-Navy standard for this product. This drawing supersedes all antecedent standard drawings for the same product and shall become effective for the procurement of aeronautical supplies, or for use in new design, not later than 6 months after the latest date of approval shown.

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN121526 THRU AN121550
NONE	NUT - PLAIN, CORROSION RESISTANT STEEL	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:26Z
Check the source to verify that this is the current version before use.