
FED. SUP CLASS. 5307

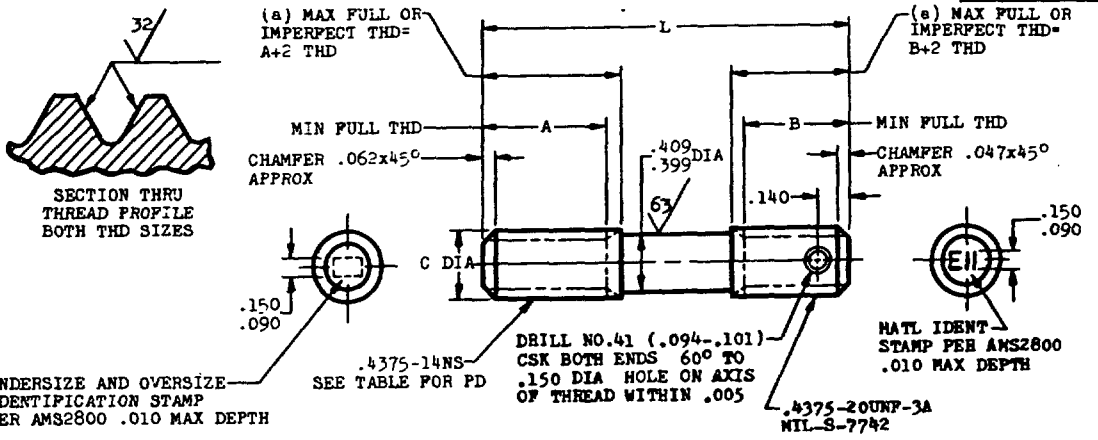

UNDERSIZE AND OVERSIZE IDENTIFICATION			-.003 (-3)	STANDARD (0)	+.003 (3)	+.006 (6)	+.009 (9)	+.012 (12)
C			.433 -.438	.433 -.438	.433 -.438	.433 -.438	.442 -.447	.442 -.447
PD BEFORE PLATING			.3927-.3937	.3957-.3967	.3987-.3997	.4017-.4027	.4047-.4057	.4077-.4087
PD AFTER PLATING			.3932-.3947	.3962-.3977	.3992-.4007	.4022-.4037	.4052-.4067	.4082-.4097
PD LEAD THREAD			.3861-.3881	.3891-.3911	.3921-.3941	.3951-.3971	.3981-.4001	.4011-.4031
L	A	B	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER
1.688	.875	.625	AN129077	AN129078	AN129079	AN129080	AN129081	AN129082
1.875	1.094	.625	AN129083	AN129084	AN129085	AN129086	AN129087	AN129088
1.938	1.156	.625	AN129089	AN129090	AN129091	AN129092	AN129093	AN129094

INACTIVE FOR DESIGN AFTER 26 OCTOBER 1972. NO SUPERSEDING STANDARD

NOTE: PITCH DIAMETERS OF BOTH THREADED ENDS SHALL BE CONCENTRIC WITHIN .006 FIR.
(a) CROSS THREADING PERMISSABLE AT THREAD RUNOUTS ON SHORT STUDS.
MATERIAL: STEEL AMS 6322 (AMS 6320 MATERIAL MAY ALSO BE USED FOR THESE PARTS UNTIL 1 JAN. 1960)
HARDNESS: ROCKWELL C26-32.
FINISH: CADMIUM PLATE AMS 2400. DIMENSIONS ARE AFTER PLATING EXCEPT WHERE SHOWN.
SURFACE ROUGHNESS: AS291
MANUFACTURING SPECIFICATION AMS 7456.
(3) INSPECTION: ALL PARTS SHALL UNDERGO MAGNETIC INSPECTION IN ACCORDANCE WITH AMS2640.
BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES; LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±5°.
DO NOT USE UNASSIGNED PART NUMBERS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED 19 May 50 REVISED (1) 23 Jun 58 (2) 26 Oct 72 (3) 30 June 1986

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

NOTE: This standard was approved by joint action of the Air Force and Navy Departments in the Air Force-Navy standard for this product. This standard supersedes all preexistent standard drawings issued by the departments and shall become effective for the procurement of aeronautical materiel for use in new designs not later than 6 months after the latest date of approval shown.

PA 11 CUST: AV, AS 11	AIR FORCE-NAVY AERONAUTICAL STANDARD STUD - STRAIGHT, DRILLED, .4375-14 x .4375-20	AN129065 THRU AN129124

*U.S. GOVERNMENT PRINTING OFFICE: 1987-201-616/3017

Project No. 5307-0357

☆U.S. GOVERNMENT PRINTING OFFICE: 1986 — 605-036/43905

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:27Z
Check the source to verify that this is the current version before use.