DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

NOTE: This drawing was approved by joint action of the Air Force and Navy Departments as the Air Force-Navy standard for this product. This drawing supersedes all antecedent standard drawings for the same product and shall become effective for the procurement of aeronautical supplies, or for use in new design, not later than 6 months after the latest date of approval shown.

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

FED. SUP CLASS.
5307

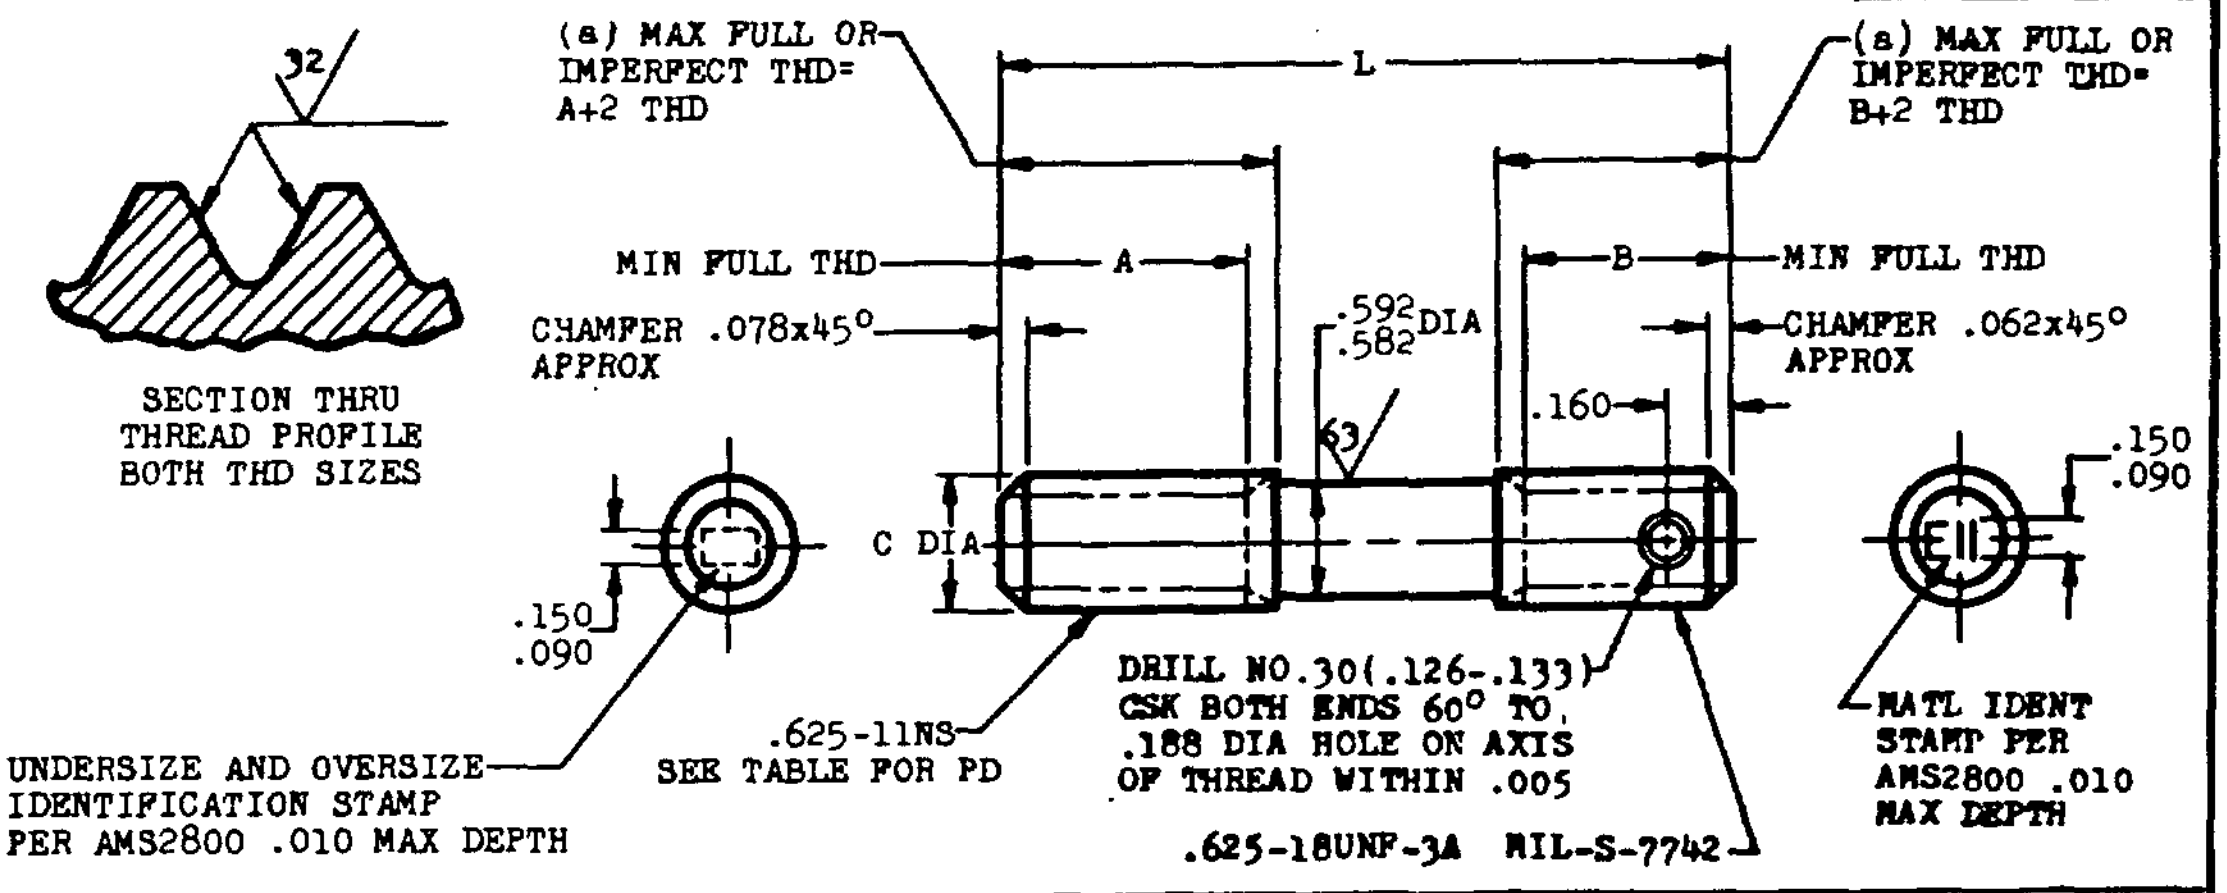
32
SECTION THRU
THREAD PROFILE
BOTH THD SIZES
(a) MAX FULL OR IMPERFECT THD= A+2 THD
L
(a) MAX FULL OR IMPERFECT THD= B+2 THD
MIN FULL THD
A
B
MIN FULL THD
CHAMFER .078x45° APPROX
.592
.582 DIA
CHAMFER .062x45° APPROX
.160
63
.150
.090
C DIA
.150
.090
DRILL NO.30(.126-.133) CSK BOTH ENDS 60° TO .188 DIA HOLE ON AXIS OF THREAD WITHIN .005
.625-11NS SEE TABLE FOR PD
UNDERSIZE AND OVERSIZE IDENTIFICATION STAMP PER AMS2800 .010 MAX DEPTH
.625-18UNF-3A MIL-S-7742
MATL IDENT STAMP PER AMS2800 .010 MAX DEPTH
E11

UNDERSIZE AND OVERSIZE IDENTIFICATION			-.003	STANDARD	+.003	+.006	+.009	+.012
			(-3)	○	③	⑥	⑨	⑫
C			.620 -.625	.620 -.625	.620 -.625	.620 -.625	.629 -.634	.629 -.634
PD BEFORE PLATING			.5682-.5692	.5712-.5722	.5742-.5752	.5772-.5782	.5802-.5812	.5832-.5842
PD AFTER PLATING			.5687-.5702	.5717-.5732	.5747-.5762	.5777-.5792	.5807-.5822	.5837-.5852
PD LEAD THREAD			.5610-.5630	.5640-.5660	.5670-.5690	.5700-.5720	.5730-.5750	.5760-.5780
L	A	B	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER
2.375	1.250	1.000	AN129245	AN129246	AN129247	AN129248	AN129249	AN129250
2.438	1.312	1.000	AN129251	AN129252	AN129253	AN129254	AN129255	AN129256
2.750	1.562	1.000	AN129257	AN129258	AN129259	AN129260	AN129261	AN129262

INACTIVE FOR DESIGN AFTER 26 OCTOBER 1972. NO SUPERSEDING STANDARD.

NOTE: PITCH DIAMETERS OF BOTH THREADED ENDS SHALL BE CONCENTRIC WITHIN .006 FIR.
(a) CROSS THREADING PERMISSABLE AT THREAD RUNOUTS ON SHORT STUDS.
MATERIAL: STEEL AMS 6322 (AMS 6320 MATERIAL MAY ALSO BE USED FOR THESE PARTS UNTIL 1 JAN 1960)
HARDNESS: ROCKWELL C26-32.
FINISH: CADMIUM PLATE AMS 2400. DIMENSIONS ARE AFTER PLATING EXCEPT WHERE SHOWN.
SURFACE ROUGHNESS: AS291
MANUFACTURING SPECIFICATION AMS 7456.
③ INSPECTION: ALL PARTS SHALL UNDERGO MAGNETIC INSPECTION IN ACCORDANCE WITH AMS2640.
BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES; LINEAR DIMENSIONS ±.010.
DO NOT USE UNASSIGNED PART NUMBERS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED 19 May 50 REVISED ① 23 Jun 58 ② 26 Oct 72 ③ 30 June 1986

PA 11
CUST AV, AS
11

AIR FORCE-NAVY AERONAUTICAL STANDARD

STUD - STRAIGHT, DRILLED, .625-11 x .625-18

**AN129233
THRU
AN129292**

*U.S. GOVERNMENT PRINTING OFFICE: 1967-261-611/3017

Project No. 5307-0360

☆U.S. GOVERNMENT PRINTING OFFICE: 1986 — 605-036/43908

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:27Z
Check the source to verify that this is the current version before use.