
FED. SUP CLASS.
5307

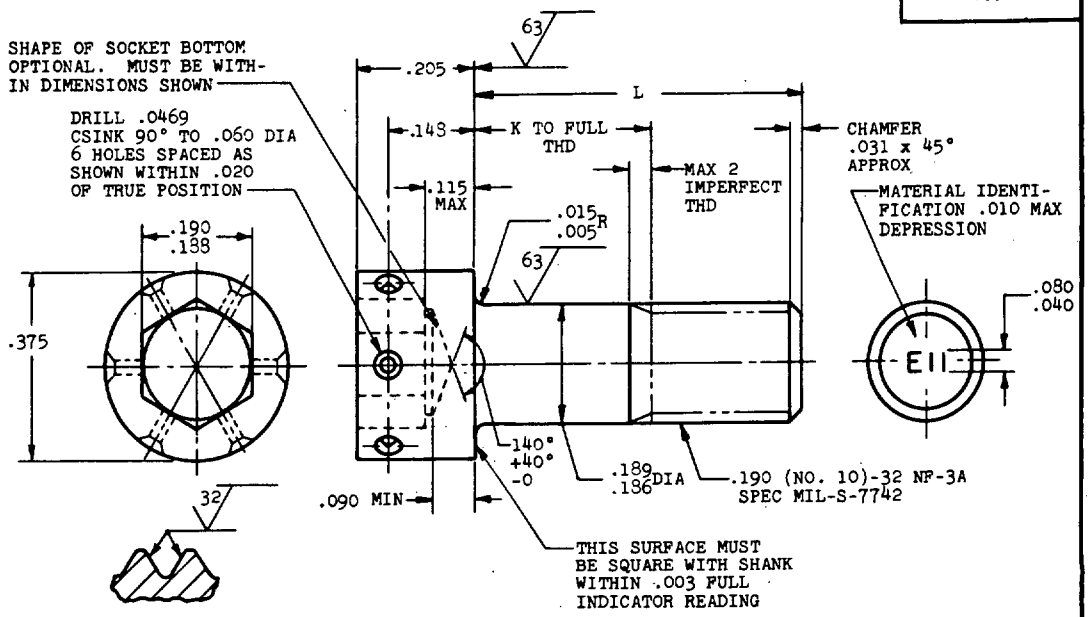

SECTION THRU THREAD PROFILE

L	K +.000 -.060	PART NO.	L	K +.000 -.060	PART NO.	L	K +.000 -.060	PART NO.	L	K +.000 -.060	PART NO.
			1.188	.562	AN148568	2.625	2.000	AN148582			
.375	(a)	AN148555	1.250	.625	AN148569	2.750	2.125	AN148583			
.438	(a)	AN148556	1.312	.688	AN148570	2.875	2.250	AN148584			
.500	(a)	AN148557	1.375	.750	AN148571	3.000	2.375	AN148585			
.562	(a)	AN148558	1.438	.812	AN148572	3.125	2.500	AN148586			
.625	(a)	AN148559	1.500	.875	AN148573	3.250	2.625	AN148587			
.688	(a)	AN148560	1.625	1.000	AN148574	3.375	2.750	AN148588			
.750	.125	AN148561	1.750	1.125	AN148575	3.500	2.875	AN148589			
.812	.188	AN148562	1.875	1.250	AN148576	3.625	3.000	AN148590			
.875	.250	AN148563	2.000	1.375	AN148577	3.750	3.125	AN148591			
.938	.312	AN148564	2.125	1.500	AN148578	3.875	3.250	AN148592			
1.000	.375	AN148565	2.250	1.625	AN148579						
1.062	.438	AN148566	2.375	1.750	AN148580						
1.125	.500	AN148567	2.500	1.875	AN148581						

(a) THREAD TO HEAD. MAXIMUM TWO IMPERFECT THREADS.

NOTE: (1) THE RUNOUT FOR STRAIGHTNESS OF SHANK SHALL NOT EXCEED .004 FIR PER INCH OF BOLT LENGTH.
(2) THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR.
(3) THE CONCENTRICITY OF THE HEXAGON SOCKET IN RELATION TO OD OF HEAD SHALL BE WITHIN .006 FIR.
(4) THE CONCENTRICITY OF THE SHANK IN RELATION TO OD OF HEAD SHALL BE WITHIN .005 FIR.

MATERIAL: STEEL AMS 6322

HARDNESS: ROCKWELL C32-36

FINISH: CADMIUM PLATE AMS 2400

SURFACE ROUGHNESS: AS107

MANUFACTURING SPECIFICATION: AMS 7452

(3) INSPECTION: ALL PARTS SHALL UNDERGO MAGNETIC INSPECTION IN ACCORDANCE WITH AMS2640.

BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES; LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±2°.

DO NOT USE UNASSIGNED PART NUMBERS.

INACTIVE FOR DESIGN AFTER 1 JAN 1960 **SEE DRAWING MS9088**

For definition and application of drawing status notes, see ANA Bulletin No. 337.

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED 30 Jun 49 REVISED (1) 7 Jan 53 (2) 1 Aug 58 (3) 30 June 1966

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

NOTE: This drawing was approved by joint action of the Air Force and Navy Departments as the Air Force-Navy standard for this product. This drawing supersedes all preexisting standard drawings for the same product and shall become effective for the procurement of aeronautical supplies or for use in new designs not later than 6 months after the latest date of approval shown.

PA 11
CUST AV AS
11

AIR FORCE-NAVY AERONAUTICAL STANDARD

BOLT - SOCKET HEAD, 6-HOLE DRILLED, .190-32

AN148551
THRU
AN148650

Project No. 5307-0366

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:27Z
Check the source to verify that this is the current version before use.