
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

AN153801 THRU AN154100

FSC 5307

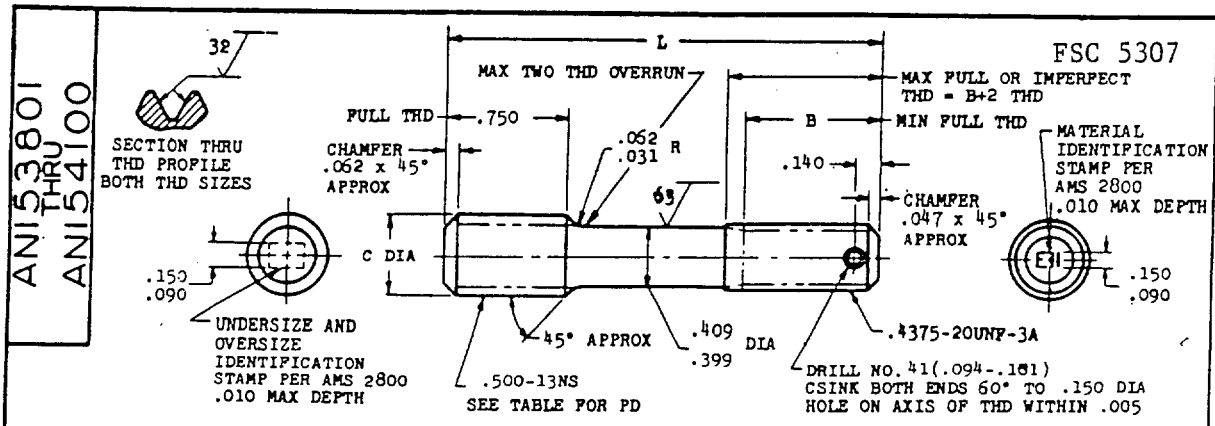

UNDERSIZE AND OVERSIZE IDENTIFICATION		-.003 (-3)	STANDARD	+.003 (3)	+.006 (6)	+.009 (9)	+.012 (12)
C		.495- .500	.495- .500	.495- .500	.495- .500	.504- .509	.504- .509
PD BEFORE PLATING		.4518-.4528	.4548-.4558	.4578-.4588	.4608-.4618	.4638-.4648	.4668-.4678
PD AFTER PLATING		.4523-.4538	.4553-.4568	.4583-.4598	.4613-.4628	.4643-.4658	.4673-.4688
PD LEAD THREAD		.4450-.4470	.4480-.4500	.4510-.4530	.4540-.4560	.4570-.4590	.4600-.4620
L	B	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER
1.500 1.562	.625 .688	AN153819 AN153825	AN153820 AN153826	AN153821 AN153827	AN153822 AN153828	AN153823 AN153829	AN153824 AN153830
1.625 1.688	.750 .750	AN153831 AN153837	AN153832 AN153838	AN153833 AN153839	AN153834 AN153840	AN153835 AN153841	AN153836 AN153842

NOTE: PITCH DIAMETERS OF BOTH THREADED ENDS SHALL BE CONCENTRIC WITHIN .006 FIR.

MATERIAL: STEEL AMS 6322. (AMS 6320 MATERIAL MAY ALSO BE USED FOR THIS PART UNTIL JANUARY 1, 1957).
HARDNESS: ROCKWELL C26-32.
FINISH: CADMIUM PLATE AMS 2400. DIMENSIONS ARE AFTER PLATING EXCEPT WHERE SHOWN.
SURFACE ROUGHNESS: AS 107.
MANUFACTURING SPECIFICATION: AMS 7456. PARTS SUBJECT TO MAGNETIC INSPECTION PER AMS 2640.
BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES; LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±2°.

DO NOT USE UNASSIGNED PART NUMBERS.

(4) CANCELED AS OF 9 OCT 87

(2) INACTIVE FOR DESIGN AFTER 26 OCTOBER 1972. NO SUPERSEDING STANDARD

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED 19 May 50 REVISED (1) 25 Mar 55 (2) 26 Oct 72 (4) 9 OCT 87

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN153801 THRU AN154100
NONE	STUD-STEPPED, DRILLED, 1.5 DIA ENGAGEMENT, .500-13 x .4375-20	

E-25-121

Project 5307-0376

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:27Z
Check the source to verify that this is the current version before use.