
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

AN154101 THRU AN154400

FSC 5307

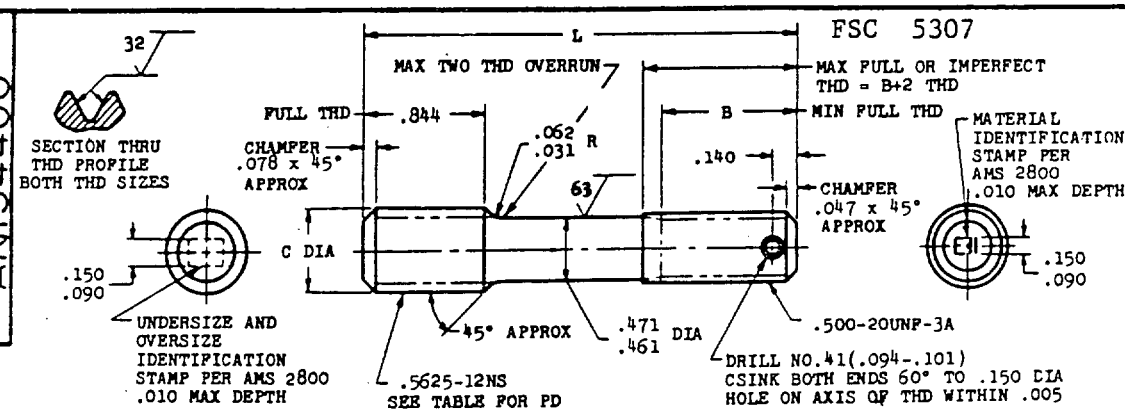

UNDERSIZE AND OVERSIZE IDENTIFICATION		-.003 (-3)	STANDARD	+.003 (3)	+.006 (6)	+.009 (9)	+.012 (12)
C		.557- .562	.557- .562	.557- .562	.557- .562	.566- .571	.566- .571
PD BEFORE PLATING		.5104-.5114	.5134-.5144	.5164-.5174	.5194-.5204	.5224-.5234	.5254-.5264
PD AFTER PLATING		.5109-.5124	.5139-.5154	.5169-.5184	.5199-.5214	.5229-.5244	.5259-.5274
PD LEAD THREAD		.5034-.5054	.5064-.5084	.5094-.5114	.5124-.5144	.5154-.5174	.5184-.5204
L	B	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER
1.719 1.781	.750 .812	AN154119 AN154125	AN154120 AN154126	AN154121 AN154127	AN154122 AN154128	AN154123 AN154129	AN154124 AN154130
1.844 1.906	.875 .875	AN154131 AN154137	AN154132 AN154138	AN154133 AN154139	AN154134 AN154140	AN154135 AN154141	AN154136 AN154142

NOTE: PITCH DIAMETERS OF BOTH THREADED ENDS SHALL BE CONCENTRIC WITHIN .006 FIR.

MATERIAL: STEEL AMS 6328 (AMS 6320 MATERIAL MAY ALSO BE USED FOR THIS PART UNTIL JANUARY 1, 1957).
HARDNESS: ROCKWELL C26-32.
FINISH: CADMIUM PLATE AMS 2400. DIMENSIONS ARE AFTER PLATING EXCEPT WHERE SHOWN.
SURFACE ROUGHNESS: AS 107.
MANUFACTURING SPECIFICATION: AMS 7456. PARTS SUBJECT TO MAGNETIC INSPECTION PER AMS 2640.
BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES; LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±2°.

(4) CANCELED AS OF 9 OCT 87

(2) DO NOT USE UNASSIGNED PART NUMBERS.

INACTIVE FOR DESIGN AFTER 26 OCTOBER 1972. NO SUPERSEDING STANDARD

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED 1 Mar 50 REVISED (1) 25 Mar 55 (2) 26 Oct 72 (4) 9 OCT 87

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN154101 THRU AN154400
NONE	STUD-STEPPED, DRILLED, 1.5 DIA ENGAGEMENT, .5625-12 x .500-20	

E-25-121

Project 5307-0377

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:27Z
Check the source to verify that this is the current version before use.