
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

NOTE: This drawing was approved by joint action of the Air Force and Navy Departments as the Air Force-Navy standard for the product. This drawing supersedes all associated standard drawings for the same product and shall become effective for the procurement of commercial supplies, or for use in new designs, not later than 6 months after the latest date of approval shown.

AI: When Government drawings, specifications, or other data are used for any purpose other than in connection with a def. ... the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

AN156501 THRU AN156800

FSC 5307

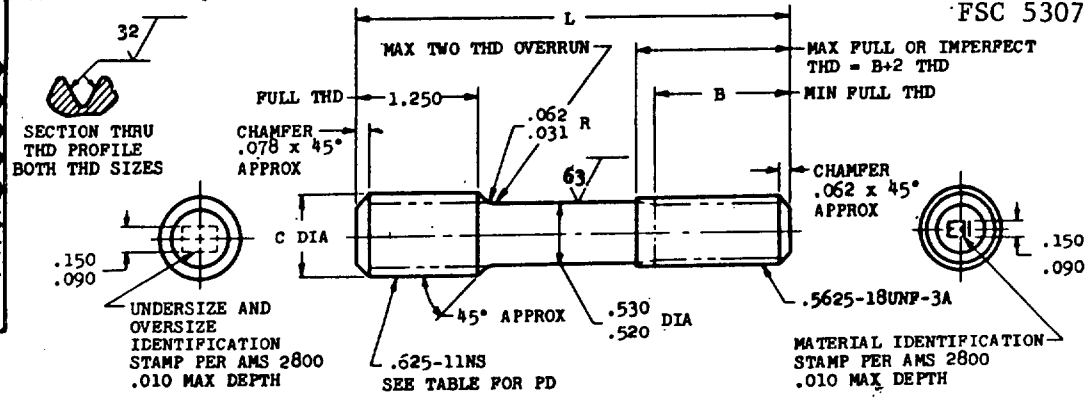

UNDERSIZE AND OVERSIZE IDENTIFICATION		-.003 (-3)	STANDARD	+.003 (3)	+.006 (6)	+.009 (9)	+.012 (12)
C		.620- .625	.620- .625	.620- .625	.620- .625	.629- .634	.629- .634
PD BEFORE PLATING		.5682-.5692	.5712-.5722	.5742-.5752	.5772-.5782	.5802-.5812	.5832-.5842
PD AFTER PLATING		.5687-.5702	.5717-.5732	.5747-.5762	.5777-.5792	.5807-.5822	.5837-.5852
PD LEAD THREAD		.5610-.5630	.5640-.5660	.5670-.5690	.5700-.5720	.5730-.5750	.5760-.5780
L	B	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER
2.188 2.250	.812 .875	AN156519 AN156525	AN156520, AN156526	AN156521 AN156527	AN156522 AN156528	AN156523 AN156529	AN156524 AN156530
2.312 2.375 2.438	.938 1.000 1.000	AN156531 AN156537 AN156543	AN156532 AN156538 AN156544	AN156533 AN156539 AN156545	AN156534 AN156540 AN156546	AN156535 AN156541 AN156547	AN156536 AN156542 AN156548

NOTE: PITCH DIAMETERS OF BOTH THREADED ENDS SHALL BE CONCENTRIC WITHIN .006 FIR.

MATERIAL: STEEL AMS 6322 (AMS 6320 MATERIAL MAY ALSO BE USED FOR THIS PART UNTIL JANUARY 1, 1957).
HARDNESS: ROCKWELL C26-32.
FINISH: CADMIUM PLATE AMS 2400. DIMENSIONS ARE AFTER PLATING EXCEPT WHERE SHOWN.
SURFACE ROUGHNESS: AS 107.
MANUFACTURING SPECIFICATION: AMS 7456. PARTS SUBJECT TO MAGNETIC INSPECTION PER AMS 2640.
BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES; LINEAR DIMENSIONS ±.010.

(2) INACTIVE FOR DESIGN AFTER 26 OCTOBER 1972. NO SUPERSEDING STANDARD.
DO NOT USE UNASSIGNED PART NUMBERS. (4) CANCELED AS OF 9 OCT 87

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED 19 May 50 REVISED (1) 25 Mar 55 (2) 26 Oct 72 (4) 9 OCT 87

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN156501 THRU AN156800
NONE	STUD-STEPPED, 2 DIA ENGAGEMENT; .625-11 x .5625-18	

E-25-121

Project 5307-0385

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:27Z
Check the source to verify that this is the current version before use.