
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

AN157701 THRU AN158000

FSC 5307

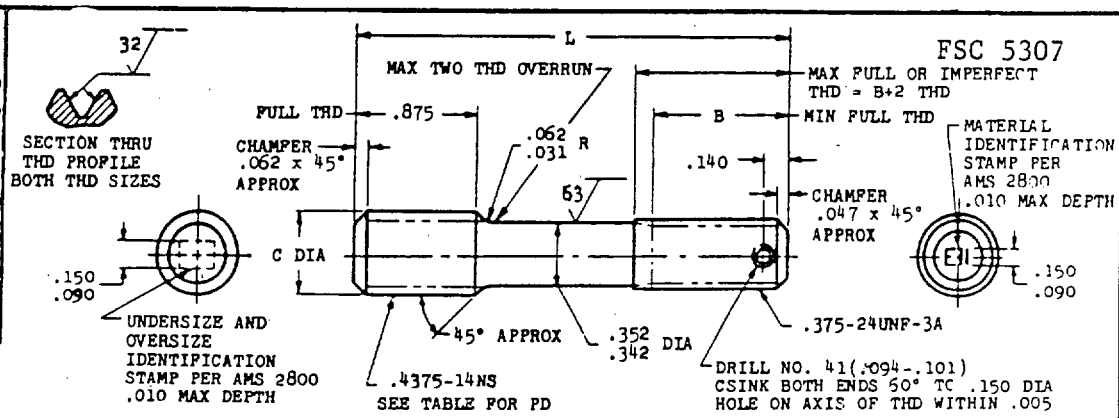

UNDERSIZE AND OVERSIZE IDENTIFICATION		-.003 (-3)	STANDARD	+.003 (3)	+.006 (6)	+.009 (9)	+.012 (12)
C		.433- .438	.433- .438	.433- .438	.433- .438	.442- .447	.442- .447
PD BEFORE PLATING		.3927-.3937	.3957-.3967	.3987-.3997	.4017-.4027	.4047-.4057	.4077-.4087
PD AFTER PLATING		.3932-.3947	.3962-.3977	.3992-.4007	.4022-.4037	.4052-.4067	.4082-.4097
PD LEAD THREAD		.3861-.3881	.3891-.3911	.3921-.3941	.3951-.3971	.3981-.4001	.4011-.4031
L	B	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER
1.562	.562	AN157719	AN157720	AN157721	AN157722	AN157723	AN157724
1.625	.625	AN157725	AN157726	AN157727	AN157728	AN157729	AN157730
1.688	.688	AN157731	AN157732	AN157733	AN157734	AN157735	AN157736
1.750	.688	AN157737	AN157738	AN157739	AN157740	AN157741	AN157742

NOTE: PITCH DIAMETERS OF BOTH THREADED ENDS SHALL BE CONCENTRIC WITHIN .006 FIR.

MATERIAL: STEEL AMS 6322 (AMS 6320 MATERIAL MAY ALSO BE USED FOR THIS PART UNTIL JANUARY 1, 1957).
HARDNESS: ROCKWELL C26-32.
FINISH: CADMIUM PLATE AMS 2400. DIMENSIONS ARE AFTER PLATING EXCEPT WHERE SHOWN.
SURFACE ROUGHNESS: AS 107.
MANUFACTURING SPECIFICATION: AMS 7456. PARTS SUBJECT TO MAGNETIC INSPECTION PER AMS 2640.
BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES; LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±2°.

(2) DO NOT USE UNASSIGNED PART NUMBERS.

(4) CANCELED AS OF 9 OCT 87

(2) INACTIVE FOR DESIGN AFTER 26 OCTOBER 1972. NO SUPERSEDING STANDARD.

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED ... REVISED (1) 25 Mar 55 (2) 26 Oct 72 (4) 9 OCT 87

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN157701 THRU AN158000
NONE	STUD-STEPPED, DRILLED, 2 DIA ENGAGEMENT, .4375-14 x .375-24	

E-25-121

Project 5307-0389

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:28Z
Check the source to verify that this is the current version before use.