
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

AN158301 THRU AN158600

FSC 5307

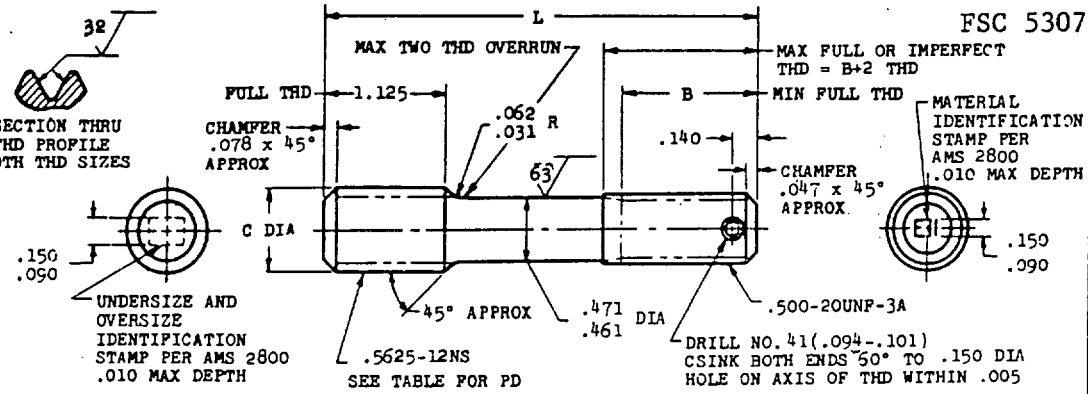

UNDERSIZE AND OVERSIZE IDENTIFICATION		-.003 (-3)	STANDARD	+.003 (3)	+.006 (6)	+.009 (9)	+.012 (12)
C		.557- .562	.557- .562	.557- .562	.557- .562	.565- .571	.565- .571
PD BEFORE PLATING		.5104-.5114	.5134-.5144	.5164-.5174	.5194-.5204	.5224-.5234	.5254-.5264
PD AFTER PLATING		.5109-.5124	.5139-.5154	.5169-.5184	.5199-.5214	.5229-.5244	.5259-.5274
PD LEAD THREAD		.5034-.5054	.5064-.5084	.5094-.5114	.5124-.5144	.5154-.5174	.5184-.5204
L	B	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER
2.000	.750	AN158319	AN158320	AN158321	AN158322	AN158323	AN158324
2.062	.812	AN158325	AN158326	AN158327	AN158328	AN158329	AN158330
2.125	.875	AN158331	AN158332	AN158333	AN158334	AN158335	AN158336
2.188	.875	AN158337	AN158338	AN158339	AN158340	AN158341	AN158342

NOTE: PITCH DIAMETERS OF BOTH THREADED ENDS SHALL BE CONCENTRIC WITHIN .006 FIR.

MATERIAL: STEEL AMS 6322. (AMS 6320 MATERIAL MAY ALSO BE USED FOR THIS PART UNTIL JANUARY 1, 1957).
HARDNESS: ROCKWELL C26-32.
FINISH: CADMIUM PLATE AMS 2400. DIMENSIONS ARE AFTER PLATING EXCEPT WHERE SHOWN.
SURFACE ROUGHNESS: AS 107.
MANUFACTURING SPECIFICATION: AMS 7456. PARTS SUBJECT TO MAGNETIC INSPECTION PER AMS 2640.
BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES; LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±2°.

DO NOT USE DMASSIGNED PART NUMBERS.

(2) INACTIVE FOR DESIGN AFTER 26 OCTOBER 1972. NO SUPERSEDING STANDARD.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

(1) CANCELED AS OF 9 OCT 87

APPROVED 19 Mar 50 REVISED (1) 25 Mar 55 (2) 26 Oct 72 (4) 9 OCT 87

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN158301 THRU AN158600
NONE	STUD-STEPPED, DRILLED, 2 DIA ENGAGEMENT, .5625-12 x .500-20	

E-25-121

Project 5307-0391

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:28Z
Check the source to verify that this is the current version before use.