

NOTICE - When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

NOTE: This drawing was approved by joint action of the Air Force and Navy Departments as the Air Force-Navy standard for this product. This drawing supersedes all antecedent standard drawings for the same product and shall become effective for the procurement of aeronautical supplies, or for use in new design, not later than 6 months after the latest date of approval shown.

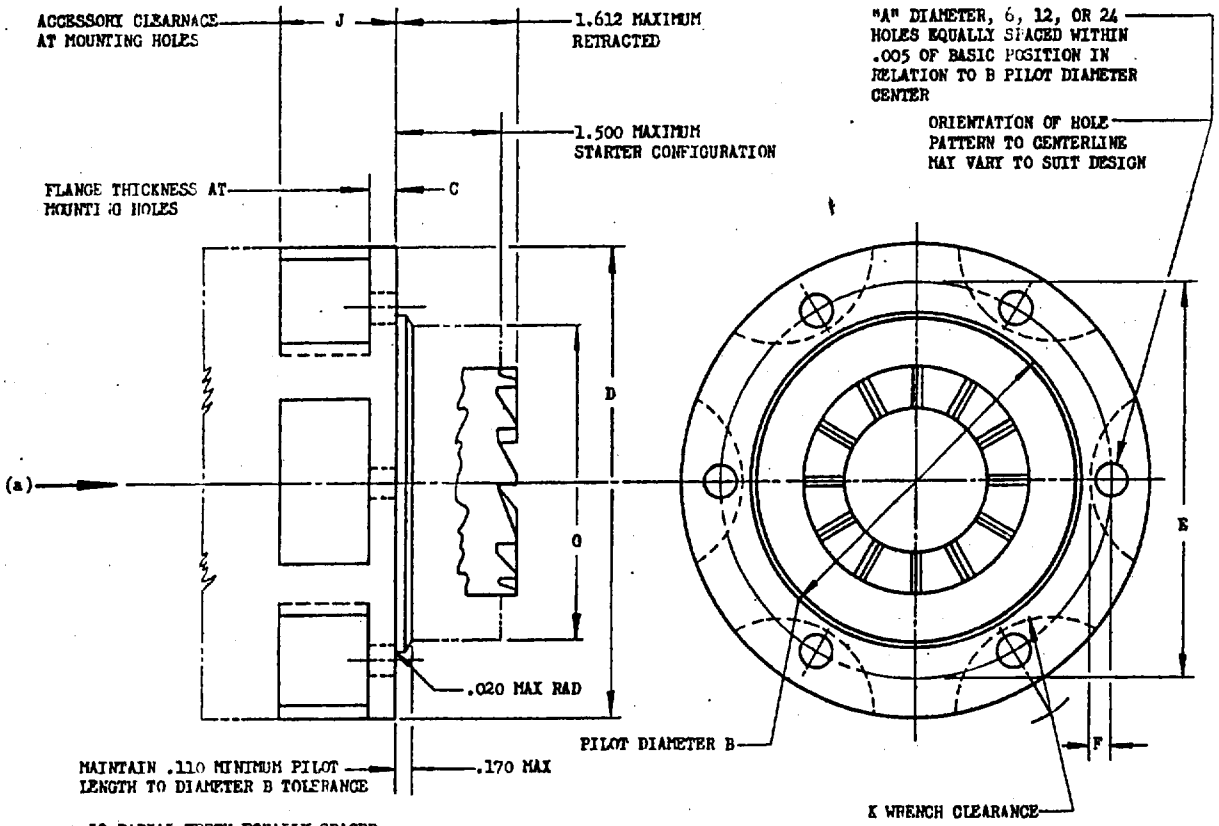

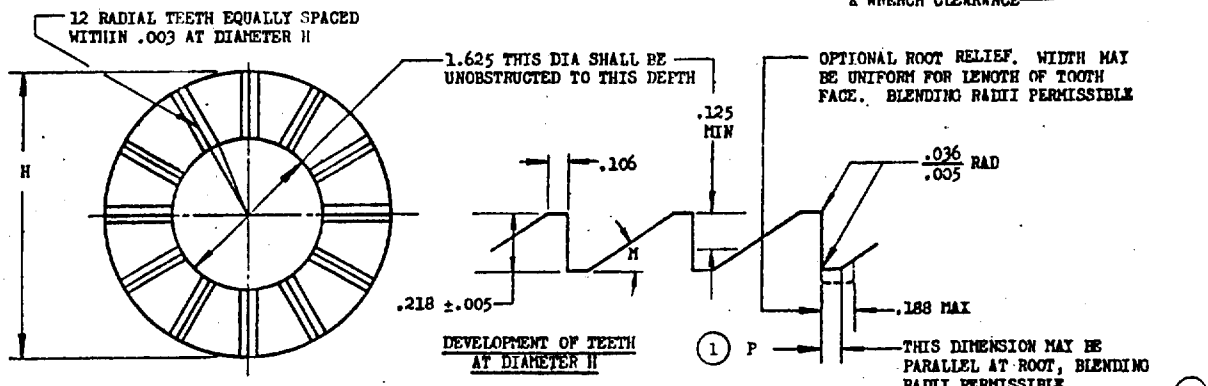

TYPE	A +.010 -.005 DIA	B +.000 -.004 DIA	C ±.075	D MAX DIA	E BASIC DIA	F MIN	O MAX	J MOUNTING CLEARANCE MIN	J MOUNTING CLEARANCE PREFERRED	K MIN RADIUS	H MAX DIA	M REF	P
XIV-D	.468	4.622	.375	7.000	5.750	.406	4.609	1.375	1.750	1.375	3.250	18° 50' 30"	.106
(1) XIV-E	.406	4.122	.310	6.000	5.000	.375	4.109	1.578	1.625	1.250	2.250	26° 20' 22"	.074

(a) ROTATION: CLOCKWISE WHEN VIEWED FROM DIRECTION SHOWN.

ACCESSORY SHALL BE CAPABLE OF SATISFACTORY OPERATION WITH THE GEOMETRIC CENTER OF THE DRIVING JAW DISPLACED TO A MINIMUM OF .010 IN ANY DIRECTION FROM THE CENTER OF PILOT DIAMETER B.

FLANGE OUTLINE AS DIMENSIONED IS A BASIC MAXIMUM AREA REQUIREMENT.

STARTER JAW TOOTH SURFACE HARDNESS SHALL BE ROCKWELL C55 MAXIMUM.

REMOVE ALL BURRS AND SHARP EDGES.

FOR DETAIL OF TYPE XIV ENGINE DRIVE, SEE AND20004 SHEET 2.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.010, ANGLES ±2°.

THIS DRAWING AND THE APPLICABLE ACCESSORY SPECIFICATIONS, TOGETHER, COMPLETELY DEFINE THE DESIGN REQUIREMENTS.

NOMINAL USE OF THIS FLANGE IS FOR STARTERS FOR RECIPROCATING ENGINES.

APPROVED 4 Mar 53 REVISED (1) 26 Nov 54

AIR FORCE-NAVY AERONAUTICAL DESIGN STANDARD

FLANGE-TYPE XIV ACCESSORY MOUNTING

AND10264

SHEET 2 OF 2

NOT A PART NUMBER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:29Z
Check the source to verify that this is the current version before use.