MILITARY STANDARD

MIL-STD-1322-865 (NAVY)

2 APRIL 1985

SUPERSEDING WR-53/865
1± JUNE 1975


UNIT LOAD
FOR DOMESTIC AND OVERSEAS SHIPMENT
FAIRING, UNDERWATER MINE, MK 19 TYPE
WITH FINS AND HARDWARE, F/MINE MK 52

UNIT LOAD DATA

NUMBER OF MINE FAIRING ASSEMBLIES PER CONTAINER	1
NUMBER OF FIN & HARDWARE ASSEMBLIES PER CONTAINER	1
NUMBER OF CONTAINERS PER UNIT LOAD	4
GROSS WEIGHT OF ONE CONTAINER	120 LBS
WEIGHT OF PALLET	75 LBS
WEIGHT OF WOOD DUNNAGE	14 LBS
WEIGHT OF STRAPPING	6 LBS
GROSS WEIGHT OF UNIT LOAD	575 LBS △
CUBE	53.0 CU.FT.


△ DO NOT USE FOR SHIPPING WEIGHT

DO NOT STACK MORE THAN 3
UNIT LOADS HIGH IN STORAGE

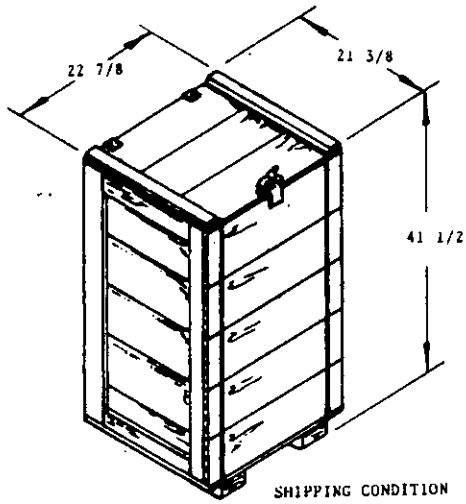

SHIPPING CONDITION
10001-2645110

VIEW A

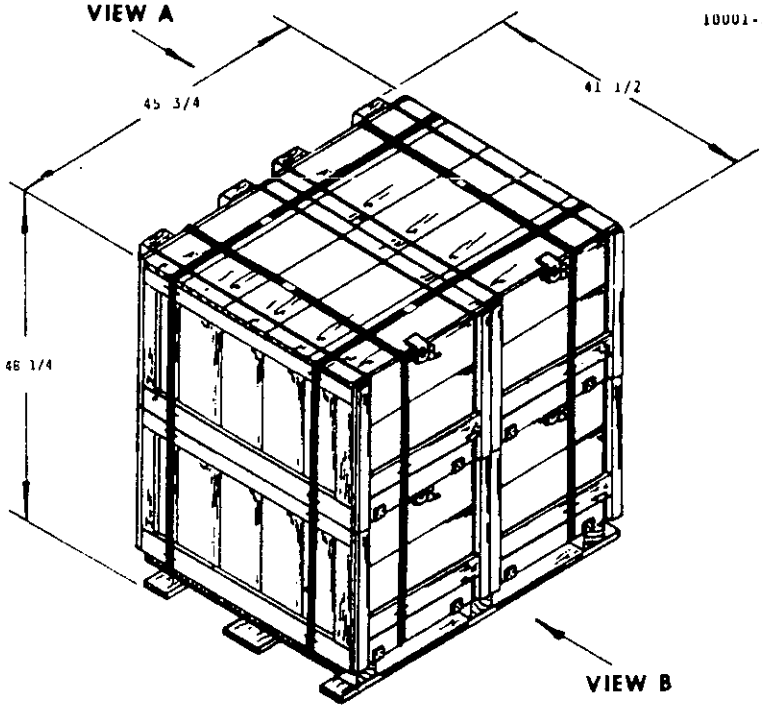

VIEW B

NOTES:

1. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.
2. FOR CROSS REFERENCE TO ASSOCIATED TRUCKLOADING, CONTAINERLOADING AND CARLOADING MILITARY STANDARDS, REFER TO INDEX TO STANDARDS, MIL-HDBK-236 (NAVY)

DISTRIBUTION STATEMENT A
Approved for public release; distribution is unlimited.

FSC 8140

THIS UNIT LOAD IS AUTHORIZED AND RELEASED FOR DEPOT HANDLING AND STORAGE AND FOR SHIPMENT BY COMMON CARRIER.

M.S. Gray NWHC 4/1/85
SIGNATURE TECHNICAL DIRECTION AGENT (TDA) DATE


J.E. Kelly 4/2/85
SIGNATURE SEA SYSCOM BY DIRECTION DATE

REQUIREMENTS FOR CONSTRUCTION OF THIS UNIT LOAD SHALL CONSIST OF THIS DOCUMENT AND THE LATEST ISSUE OF MIL-STD-1322 (NAVY)

ORIGINATOR 1 Apr 85
DATE


NAVAL WEAPONS HANDLING CENTER
WPNSTA EARLE, NEW JERSEY

Document: https://assist.dla.mil -- Downloaded: 2026-10-23T23:55Z
Check the source to verify that this is the current version before use.

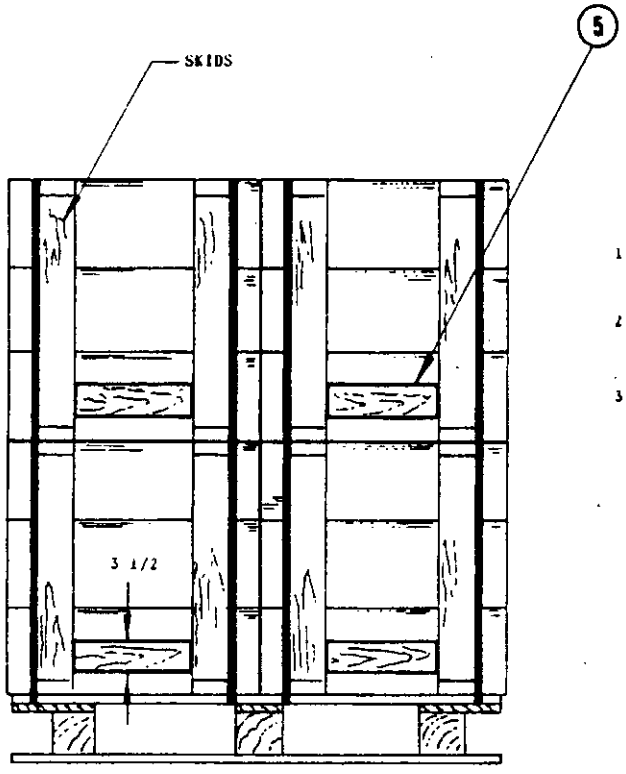

VIEW A

1. PLACE 4 CONTAINERS ON PALLET AS SHOWN ON PAGE 1.
2. CUT SKID GUARDS, ITEM 5 TO FIT SNUGLY BETWEEN SKIDS.
3. TAP SKID GUARDS INTO POSITION SO THAT THEY ARE FLUSH WITH THE SKIDS.

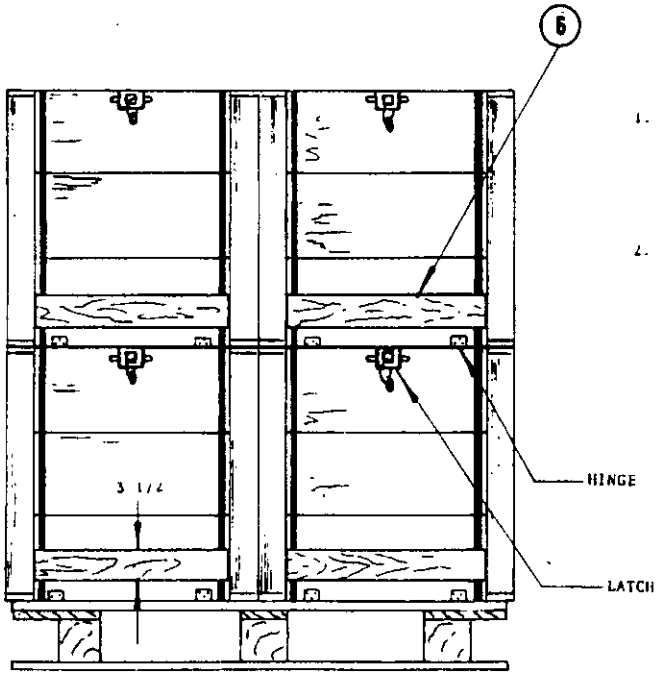

VIEW B

1. WITH CONTAINERS IN PLACE AND AFTER INSERTING SKID GUARDS, CUT COVER BATTENS TO FIT SNUGLY BETWEEN COVER CLEATS.
2. TAP COVER BATTENS INTO PLACE OVER THE 5/8 CONTAINER STRAPS AND FLUSH WITH COVER CLEATS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:55Z
Check the source to verify that this is the current version before use.

PALLETIZING PROCEDURE

A. THREAD STAPPING, ITEM 2, THROUGH SLOTS IN PALLET DECK, ITEM 1, AS SHOWN IN DETAIL A.

B. POSITION THE CONTAINERS ON THE PALLET DECK WITH EQUAL OVERHANG ON BOTH SIDES AS SHOWN.


C. INSTALL THE SKID GUARDS, ITEM 5, AND THE COVER BATTENS, ITEM 6, AS SHOWN ON PAGE 2.

D. POSITION STRAPPING, ITEM 3, UNDER THE PALLET DECK AND AROUND THE UNIT LOAD, TENSION AND DOUBLE NOTCH SEAL, ITEM 4.

E. POSITION STRAPPING, ITEM 2, AROUND THE CONTAINERS, TENSION AND DOUBLE NOTCH SEAL.


F. FASTEN STRAPPING TO CONTAINERS WITH STAPLES, ITEM 7, AS SHOWN

MARKING: IN ADDITION TO ANY SPECIAL MARKING REQUIRED BY CONTRACT OR ORDER, THE UNIT LOAD SHALL BE MARKED IN ACCORDANCE WITH MIL-STD-1522.

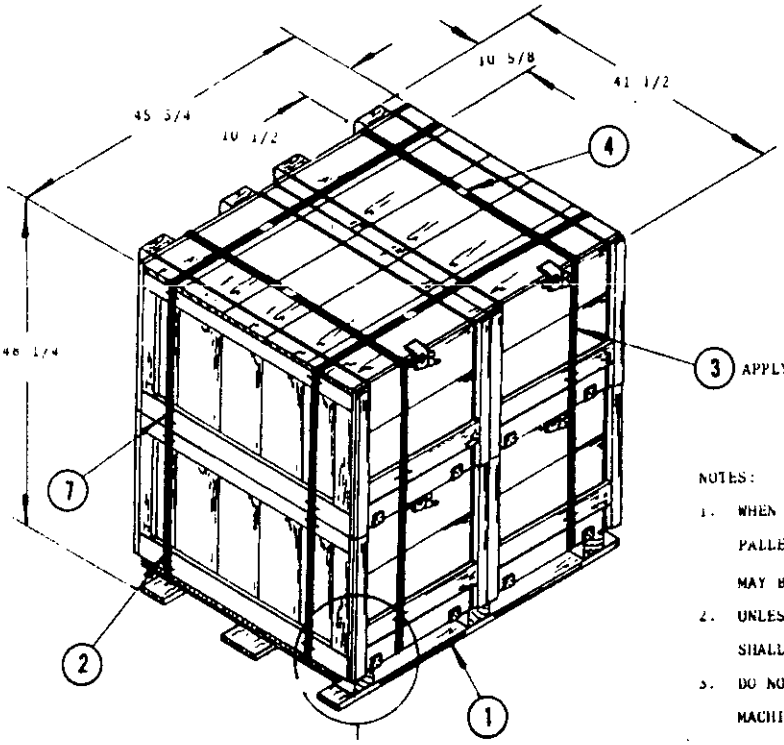

3 APPLY THESE STRAPS FIRST

SEE DETAIL A

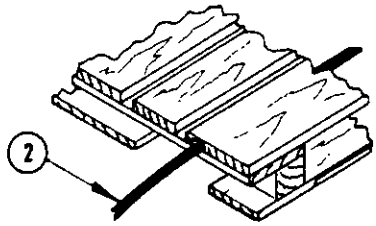

DETAIL A

NOTES:

1. WHEN MIL-P-15011 PALLET IS NOT AVAILABLE, WOOD PALLET NN-P-71, TYPE V, SIZE 2, GROUP II, III, OR IV MAY BE USED. PALLETS MUST HAVE STRAPPING SLOTS.
2. UNLESS OTHERWISE SPECIFIED ALL MATERIALS SHALL BE IN ACCORDANCE WITH MIL-STD-1522.
3. DO NOT USE TYPE I STRAPPING WITH POWER MACHINES.

DEPALLETIZING PROCEDURE

(A) REMOVE STAPLES

(B) CUT AND REMOVE STRAPPING

(C) REMOVE BATTENS AND GUARDS

(D) REMOVE CONTAINERS

LIST OF MATERIALS

REQ'D	ITEM	DESCRIPTION	MAT'L/DWG	DIMENSIONS
1 PER BATTEN	7	STAPLE	SEE NOTE 2	3/4
4	6	COVER BATTEN	SEE NOTE 2	1 X 4 X TO FIT
4	5	SKID GUARD	SEE NOTE 2	3 X 4 X TO FIT
4	4	SEAL	SEE NOTE 2	3/4
2	3	STEEL STRAPPING	SEE NOTES 2 & 3	3/4X.035X 15 FT 6
2	2	STEEL STRAPPING	SEE NOTES 2 & 3	3/4X.035X 16 FT
1	1	PALLET, WOOD	MIL-P-15011 SEE STY 1A,CL1 NOTE 1	35X 45 1/2X 5 1/2

REVIEW ACTIVITY
NAVY-OS

PREPARING ACTIVITY
NAVY-OS
(PROJECT NO. 8140-N650)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:55Z
Check the source to verify that this is the current version before use.

☆U.S. GOVERNMENT PRINTING OFFICE: 1985 — 605-036/24504