MIL-A-83995A
20 JULY 1984

SUPERSEDING
MIL-A-83995 (USAF)
4 September 1975

MILITARY SPECIFICATION
AUTOMATED DATA PROCESSING EQUIPMENT, (MAJOR COMPONENTS) PACKAGING OF

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for materials, methods, and procedures for cleaning, drying, preservating, packing and marking of automated data processing equipment (major components; central processor; line printer; card reader; tape drive; memory unit; etc.) for which detailed requirements are not available.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. Unless otherwise specified (see 6.2), the following specifications and standards of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation, form a part of this specification to the extent specified herein.

SPECIFICATIONS:

FEDERAL

NN-P-530	Plywood; Flat Panel
QQ-S-781	Strapping, Steel, and Seals
PPP-C-1752	Cushioning Material, Packaging, Unicellular Polyethylene Foam, Flexible
PPP-C-1797	Cushioning Material, Resilient, Low Density, Unicellular, Polypropylene Foam
PPP-F-320	Fiberboard; Corrugated and Solid, Sheet Stock (Container Grade), and Cut Shapes

MILITARY

MIL-P-116	Preservation, Methods of
MIL-S-21041	Slotted Metal Framing, Angles and Panels
MIL-B-26195	Box, Wood-cleated, skidded, Load-bearing Base

NO DELIVERABLE DATA REUQIRED BY THIS DOCUMENT.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: WRALC/DSTDL, Robins AFB Georgia 31098 by using the self addressed Standardization Document Improvement Proposal (DD FORM 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:56Z
Check the source to verify that this is the current version before use.

STANDARDS:

MILITARY

MIL-STD-129	Marking for Shipment and Storage
MIL-STD-731	Quality of Wood Members for Containers and Pallets
MIL-STD-1186	Cushioning, Anchoring, Bracing, Blocking and Waterproofing; with Appropriate Test Methods
MIL-STD-1189	Standard Symbology for Marking Unit Packs, Outer Containers, and Selected Documents

(Copies of specifications and standards, required by manufacturers in connection with specific aquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.1.2 Other publications. The following documents form a part of this specification to the extent specified herein.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM D 3951 - Standard Practice for Commercial Packaging

(Application for copies of ASTM publications should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, Pennsylvania 19103.)

2.1.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 Materials. Materials used shall be as specified herein and in applicable specifications and standards. All plywood shall conform to the requirements specified for Type II boxes in MIL-B-26195. All lumber shall be of nominal size. Materials not specifically designated shall be of commercial quality suitable for the purpose intended and subject to approval by the procuring activity. Materials shall be free from all defects, imperfections and contaminants which may affect the serviceability of the completed pack or packed product.

3.2 Preservation. Preservation shall be Level A, B, C or industrial as specified (6.2).

3.2.1 Levels A and B.

3.2.1.1 Internal Preparation. Internal preparation, consisting of cleaning, immobilization, blocking and bracing, shall be accomplished by technically qualified personnel in accordance with applicable equipment T.O.s, operating manuals, or maintenance handbooks.

3.2.1.2 Cleaning. Cleaning and drying shall be in accordance with applicable process of MIL-P-116 and requirements of 3.2.1.1.

3.2.1.3 Glass surfaces. Triple-wall fiberboard, PPP-F-320, shall be placed over glass surfaces and secured by taping with tape, PPP-T-76 or equal. When glass surfaces exceed 2' X 2', they shall also be protected against shattering by applying diagonal strips of 2" wide tape directly to the glass reaching from corner to corner (Figure 1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:56Z
Check the source to verify that this is the current version before use.

3.2.1.4 Corners and protrusions. All corners and protrusions shall be cushioned with PPP-C-1797 or equal to prevent rupture of barrier bag.

3.2.1.5 Unit protection. Item prepared, cleaned and protected in accordance with 3.2.1.1, 3.2.1.2, 3.2.1.3, and 3.2.1.4 as applicable shall be preserved one each Method IIa of MIL-P-116.

3.2.2 Level C. Item shall be prepared in accordance with 3.2.1.1 through 3.2.1.4 except that item shall be preserved Method III of MIL-P-116.

3.2.3 Industrial. Material shall be prepared as specified in ASTM D 3951 except that unit pack quantity shall not exceed one each.

3.3 Packing. Packing requirements shall be Level A, B, C or industrial as specified (6.2).

3.3.1 Levels A, B and C.

3.3.1.1 Mounting. Item processed in accordance with 3.2.1 shall be secured to a mounting board (Figures 2 and 3) in accordance with one of the mounting types described in 3.3.1.1.1, 3.3.1.1.2 and 3.3.1.1.3. Type I mounting is preferred over Types II and III. Dimensions of mounting board shall be determined in accordance with Table IV.

3.3.1.1.1 Type I. Item shall be secured to mounting board by not less than four bolts. Flat washers shall be placed between bolt heads and mounting board. Lock washers shall be used to prevent loosening of nuts. Size of bolts and washers shall be determined from Table I. When applicable, leveling pads shall be removed and threaded openings used to bolt item to mounting board. Removed leveling pads shall be adequately bagged, identified and secured to the base. When sufficient bolting points are not available, J-bolts, tie rod assemblies, or brackets (Figures 5 and 7) shall be used to provide a minimum of four holding points comparable in strength to that required of bolts in Table I. Mounting blocks shall be used as required (Figures 4 and 5). Center and secure item to mounting board before securing mounting board to base.

Table I - Bolts and Washers

Dia of Bolt	Min Dia of Washer		Max. Allowable Load per Bolt		
	Round	Square	Items Less than 200 Lbs	Items 200-3000 Lbs	Items Over 3000 Lbs
Inch	Inch	Inch	Pounds	Pounds	Pounds
3/8	2.10	1.50	50	75	- - -
1/2	2.85	2.10	100	150	300
5/8	3.60	2.65	150	225	450
3/4	4.70	3.25	- - -	375	750

3.3.1.1.2 Type II. Items lacking adequate bolting points to facilitate Type I mounting shall be strapped to mounting board in not less than two places with steel strapping, QQ-S-781, Class 1, Type I. Size, minimum length and maximum allowable loads of strapping shall be in accordance with Table V of MIL-STD-1186. Item shall be immobilized on mounting board by use of cradles, restraining blocks or other devices fit firmly against item and secured to mounting board with 1/2" minimum diameter machine bolts. (Figures 4 and 6) Cushioning (PPP-C-1797

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:56Z
Check the source to verify that this is the current version before use.

or equal) shall be placed between item and cradles, restraining blocks, or other devices. Flat washers (size determined from Table I) shall be placed between bolt heads and mounting board. Strapping shall pass under mount board and surround item. Cushioning (PPP-C-1797 or equal) shall be placed between item and strapping. Cente and secure item to mounting board before securing mounting board to base.

3.3.1.1.3 Type III. Items having facilities for more than one type mounting shall be secured to the mounting board utilizing a combination of mounting Types I and II (Figure 4).

3.3.1.2 Cushioning. Item mounted in accordance with 3.3.1.1 shall be floated on sufficient amount of cushioning, PPP-C-1752, Type I, Class 2, 3 inches thick, to effect a static stress of approximately 1 to 2 pounds per square inch (PSI). Table II may be used in meeting this requirement. Cushioning shall be divided (minimum 2 pieces) and positioned on flooring to best support the load bearing area of the mounting board. Restraining pads and plates shall be positioned on top of mounting board (Figures 2 and 3) to eliminate shock experienced during the cushioning recovery cycle. Cushioning and cushioning pads may be laminated to required thickness using adhesive, solvent cement for industrial use only, H.B. Fuller Co. product no. SC 430 or equal.

3.3.1.2.1 Alternative cushioning. Proposal for use of cushioning material other than that specified herein must be submitted to the procuring activity for approval. Proposal shall bear supporting evidence of shock/vibration protection equal to or greater than that provided by material specified in 3.3.1.2.

TABLE II. Cushioning

Item Weight (Pounds)	Load Bearing Surface Area (Sq. Inches)
100 - 200	100
200 - 400	200
400 - 800	400
800 - 1600	800
1600 - 2500	1250
2500 - 4800	2400

3.3.1.3 Base. Mounting board with item mounted and cushioned in accordance with 3.3.1.1 and 3.3.1.2 shall be bolted in accordance with Figures 2 and 3 to the applicable MIL-B-26195 base selected from Table III. Mounting bolts shall be positioned as near the load bearing points as possible. Loosening of mounting bolts shall be prevented by application of asphalt or unthinned white lead to exposed threads. All containers shall have rubbing strips except as noted in Table IV. Material dimensions shall be as specified in Tables III and IV.

TABLE III. Base

(Figure 2 and 3)		
Item Weight (Pounts)	Base Class	Skid Size (Inches) 1/
100 - 800	1	2 X 6
800 - 2500	2	2 X 8
2500 - 4800	2	4 X 8

1/ When rubbing strip not required (Table IV[2/]), skid thickness shall be increased to 4".

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:56Z
Check the source to verify that this is the current version before use.

TABLE IV. Material, dimensions

REQUIREMENTS			
	DIMENSIONS		REMARKS
PART	FOR CLASS 1 BASE	FOR CLASS 2 BASE	
Mounting Board	1. Length = Length of item plus 1 inch Width = Width of item plus 7 inches	Length = Same as for Class 1 base Width = Same as for Class 1 base	Length and width (1 or 2) shall be selected which results in larger dimensions. Length and width shall be further increased as required to facilitate use of mounting blocks, brackets, restraining blocks, etc.
	1/2. Length = 1/2 height of item less 13 1/4 inches Width = 1/2 height of item less 5 inches	Length = Same as for Class 1 base Width = 1/2 height of item less 9 inches	
Skid	Length = Length of mounting board plus 13 1/4 inches	Same as for Class 1 base	Number determined IAW requirements of MIL-B-26195
Rubbing Strip	2/ Length = IAW requirements of MIL-B-26195 but not less than 8 inches	Same as for Class 1 base	Rubbing strip shall not interfere with bolting of mounting board to base. (Fig 2 & 3)
Flooring	Length = Length of mounting board plus 13 1/4 inches Width = Width of mounting board plus 5 inches	Length = Length of mounting board plus 4 inches Width = Width of mounting board plus 9 inches	Nailing to skids shall be IAW requirements of MIL-B-26195
Header	Length = Width of flooring	Same as for Class 1 base	
Tie Down Floorboard	N/A	Length = Length of mounting board plus 4 inches	Bolt to base approx. 1/4 distance from both ends and/or at approx. 16-inch intervals

1/ Applies to items whose length/width in relation to height and center of balance subject them to the possibility of tipping over.
2/ Center rubbing strip not required on containers less than 56 inches in length. No rubbing strip required on containers less than 38 inches in length. (Table III 1/)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:56Z
Check the source to verify that this is the current version before use.

3.3.1.4 Superstructure. Item processed in accordance with 3.3.1.1, 3.3.1.2 or 3.3.1.3 shall be covered with a superstructure fabricated and bolted to container base in accordance with requirements of MIL-B-26195, Type II, Style A, plywood panel construction.

3.3.2 Industrial. Item processed in accordance with 3.2.2 shall be packed in accordance with ASTM D 3951.

3.4. Marking.

3.4.1 Levels A, B and C. Marking for shipment and storage shall be in accordance with MIL-STD-129, MIL-B-26195, and if specified, MIL-STD-1189 (6.2).

3.4.2 Industrial. Marking shall be in accordance with ASTM D 3951, Department of Defense Marking.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified (6.2) in contact or purchase order: The supplier is responsible for the performance of all inspection requirements; the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the government. The government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure services and supplies conform to prescribed requirements.

4.2 Quality conformance inspection.

4.2.1 Levels A and B. Each pack submitted for acceptance shall be examined to determine conformance with the applicable requirements of section 3.

4.2.1.1 Materials. All materials to be used in cleaning, preservation, packaging, and packing shall be inspected in accordance with the applicable material specification or certified inspection and laboratory test reports shall be furnished which show that the material, as furnished, conforms to the detailed specifications.

4.2.1.2 Packaging inspection. Inspection shall be in accordance with the quality assurance provisions of MIL-P-116 and the applicable characteristics specified in Table V.

4.2.2 Industrial. Each pack submitted for acceptance shall be examined to determine conformance with the applicable requirements of section 3.

TABLE V. Packaging inspection

CHARACTERISTIC NUMBER	MAJOR CHARACTERISTICS
101	Base and superstructure not in accordance with specification (3.3.1.3 & 3.3.1.4)
102	Mounting of item to mounting board not in accordance with specification (3.3.1.1)
103	Positioning or amount of cushioning not in accordance with specification (3.3.1.2)
104	Bolting of mounting board to base not in accordance with specification (3.3.1.3)
105	Closure of container not in accordance with specification (3.3.1.4)
106	Marking omitted, incorrect or illegible (3.4)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:56Z
Check the source to verify that this is the current version before use.

A defect in any of the major characteristics of Table V shall be caused for rejection. Packs which have been rejected may be reworked and resubmitted for acceptance.

5. Packaging.

5.1. This section is not applicable to this specification.

6. NOTES

6.1 Intended use. This specification is intended to be used for reference in section 5 of commodity specifications or direct in contracts or orders and ADPE Program documents. The cleaning, drying, preservation packing, and marking requirements specified herein are intended to insure proper and safe storage and distribution of automated data processing equipment (major components) for direct shipment to government activities, or shipments to be processed at a military activity or agency.

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number, and date of publication of this specification.

b. Selection of applicable preservation and packing (3.2 and 3.3).

c. Marking in accordance with MIL-STD-1189 (3.4.1).

d. When performance of inspection is not the responsibility of the supplier (4.1).

6.3 Changes from previous issues. Astericks are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodian:
Army - SM
Navy - SA
Air Force - 99

Review activities:
Army - AT, AR, AV, CR, MI
Navy - MC, YD, AS, SH, EC
Air Force - 11, 13, 43, 69

Preparing activity:
Air Force - 84
(Project No. Pack 0712)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:56Z
Check the source to verify that this is the current version before use.


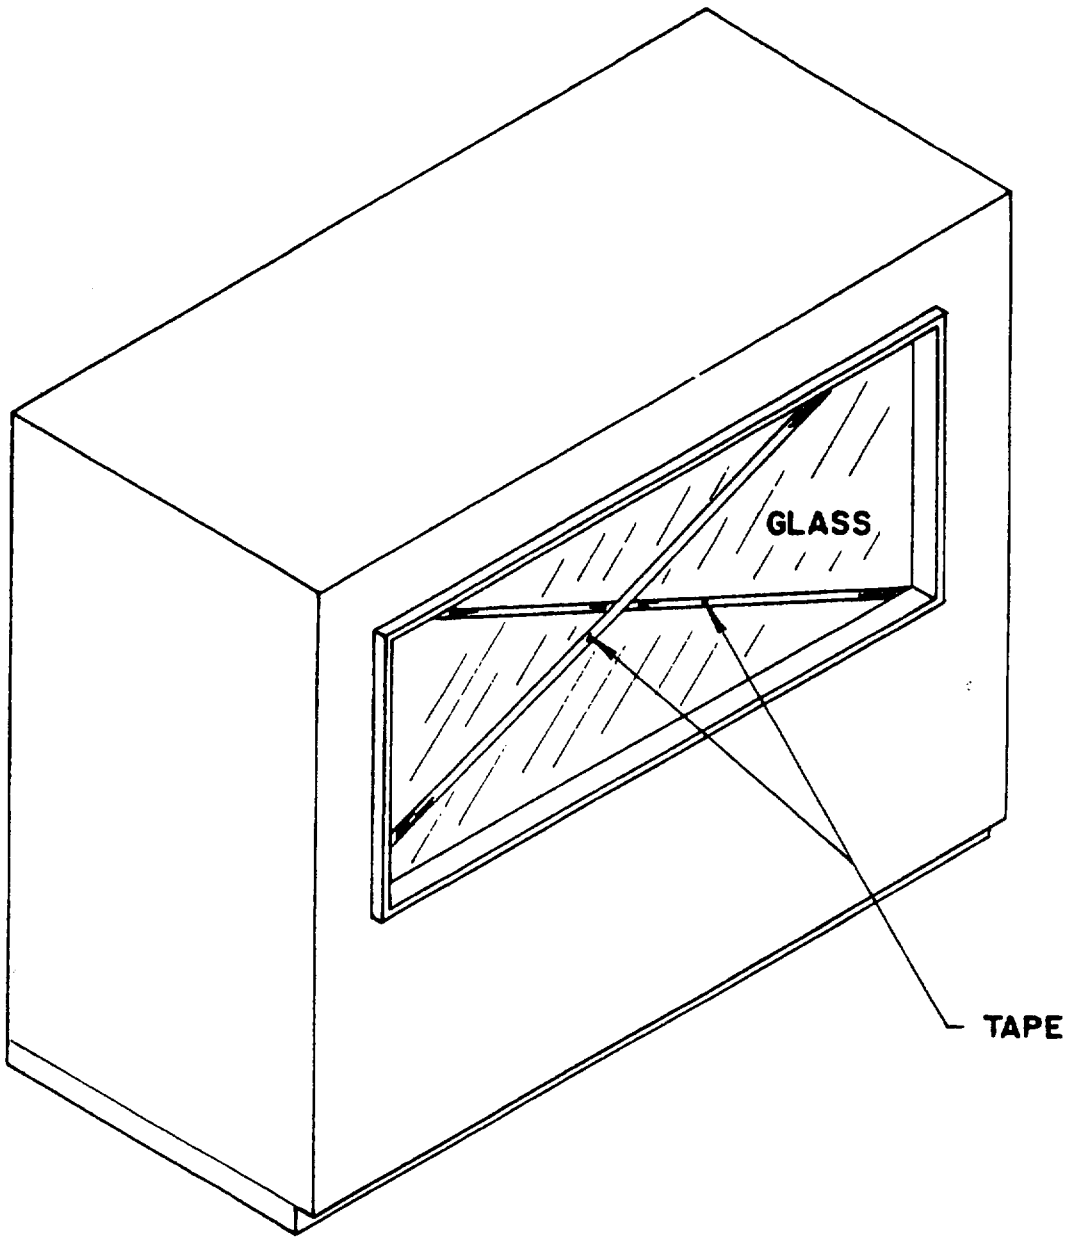


Figure 1. Protection of glass.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:56Z
Check the source to verify that this is the current version before use.

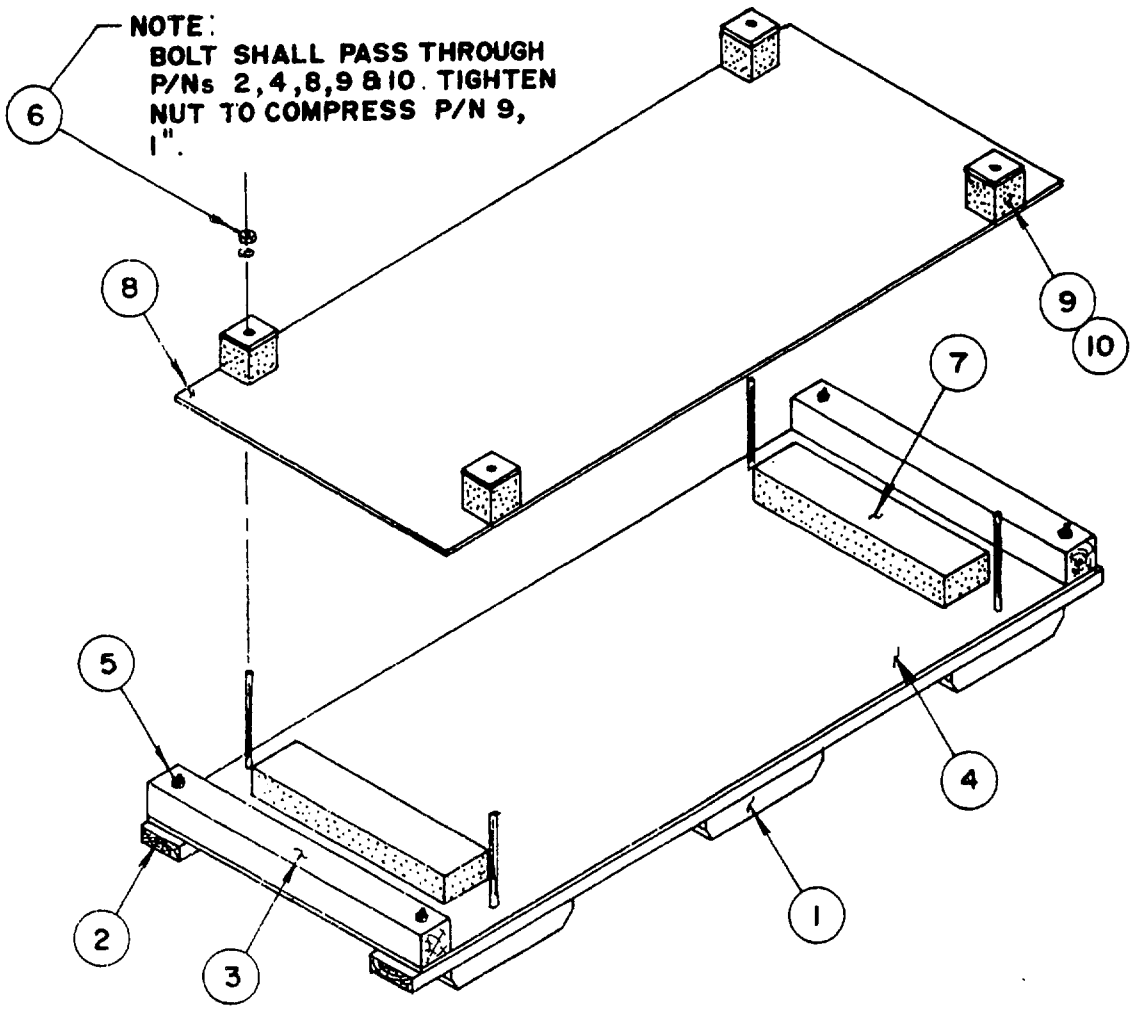


PART	QTY	DESCRIPTION	SPEC
10	4	PLATE 3 X 3 X 1/2	NN-P-530
9	4	RESTRAINING PAD 3 X 3 X 4 2 PCF	MIL-C-46842
8	1	MOUNTING BOARD 3/4" THICK 1/	NN-P-530
7	A/R	CUSHIONING 2/	MIL-C-46842
6	4	CARRIAGE BOLT, W/NUT & WASHER 1/2 DIA X 11	COMMERCIAL
5	A/R	CARRIAGE BOLT, W/NUT & WASHER 1/2 DIA X 6	COMMERCIAL
4	1	FLOORING 3/4" THICK 1/	NN-P-530
3	2	HEADER 4 X 4 X LENGTH 1/	MIL-STD-731
2	A/R	SKID 2 X 6 X LENGTH 1/	MIL-STD-731
1	A/R	RUBBING STRIP 4 X 6 X LENGTH 1/	MIL-STD-731
	1	BASE ASSY CLASS 1	MIL-B-26195(MOD)

1/ DETERMINE IAW TABLE V, LUMBER NOMINAL
2/ DETERMINE IAW 3.3.1.2

Figure 2. Class 1 base.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:56Z
Check the source to verify that this is the current version before use.

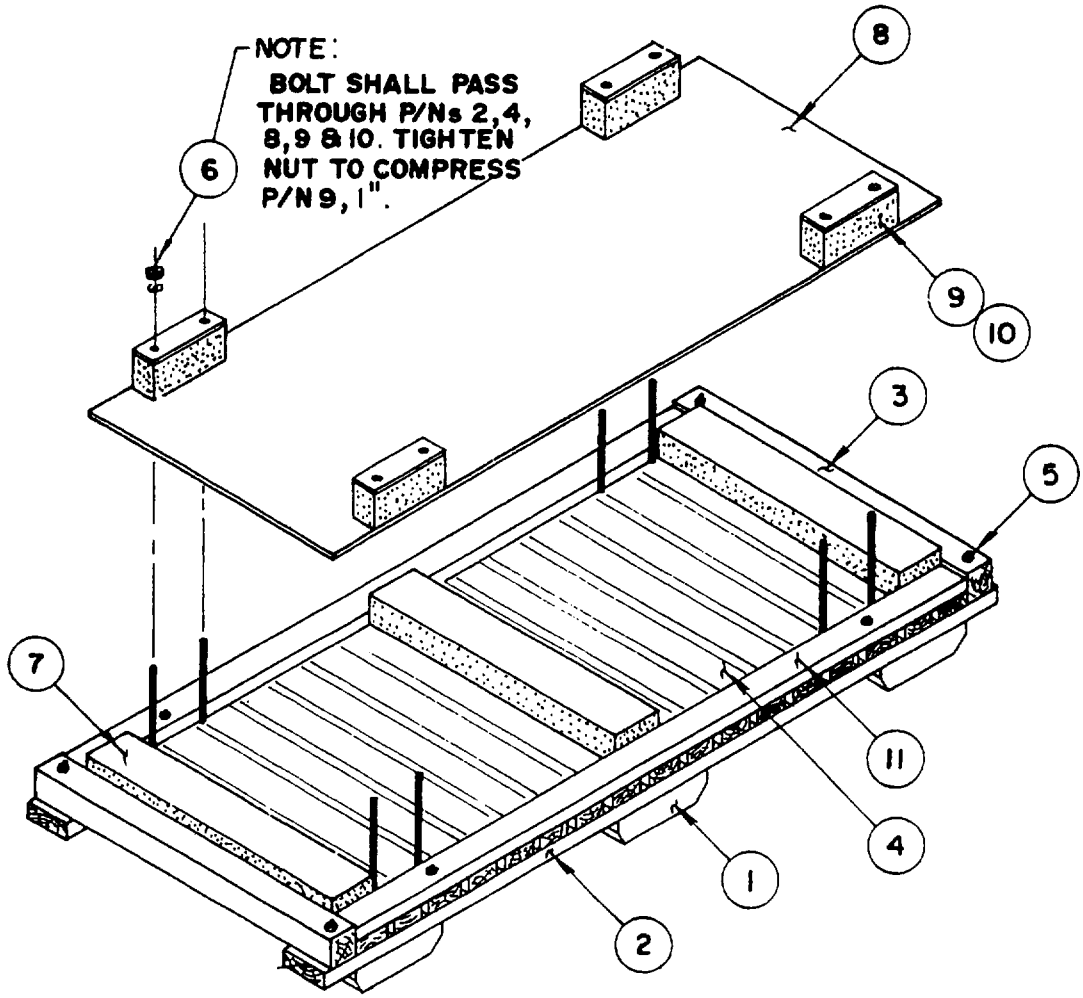

PART	QTY	DESCRIPTION	SPEC
11	2	TIE DOWN, FLOORING 2 X 4 X LENGTH 1/	MIL-STD-731
10	4	PLATE 10 X 3 X 1/2	NN-P-530
9	4	RESTRAINING PAD 10 X 3 X 4 2 PCF	MIL-C-46842
8	1	MOUNTING BOARD 3/4" THICK 1/	NN-P-530
7	A/R	CUSHIONING 2/	MIL-C-46842
6	8	CARRIAGE BOLT, W/NUT & WASHER 1/2 DIA X A/R	COMMERCIAL
5	A/R	CARRIAGE BOLT, W/NUT & WASHER 1/2 DIA X 6	COMMERCIAL
4	A/R	FLOORING 2 X 4 X LENGTH 1/	MIL-STD-731
3		HEADER 4 X 4 X LENGTH 1/	MIL-STD-731
2	A/R	SKID 1/	MIL-STD-731
1	A/R	RUBBING STRIP 4 X 6 X LENGTH 1/	MIL-STD-731
	1	BASE ASSY. CLASS 2	MIL-B-26195(MOD)

1/ DETERMINE IAW TABLE V, LUMBER NOMINAL
2/ DETERMINE IAW 3.3.1.2

Figure 3. Class 2 base.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:56Z
Check the source to verify that this is the current version before use.

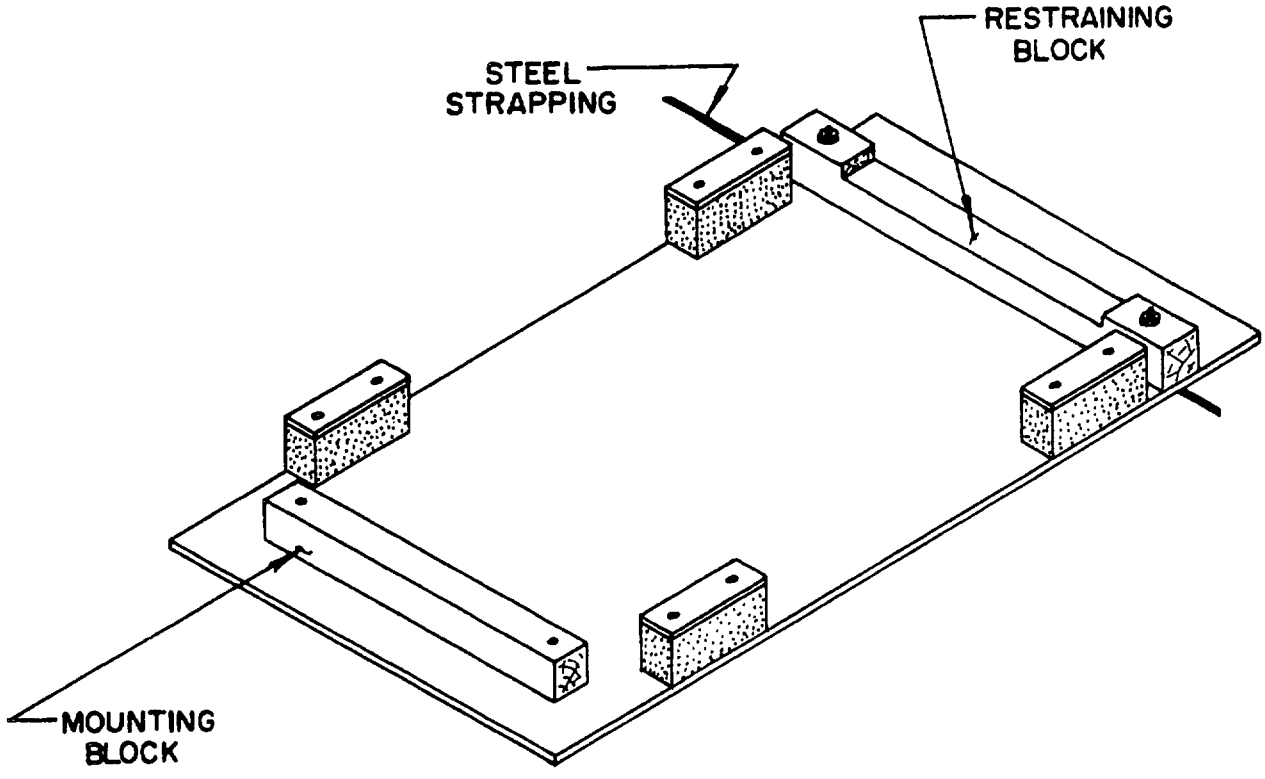


Figure 4. Mounting/restraining blocks.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:56Z
Check the source to verify that this is the current version before use.

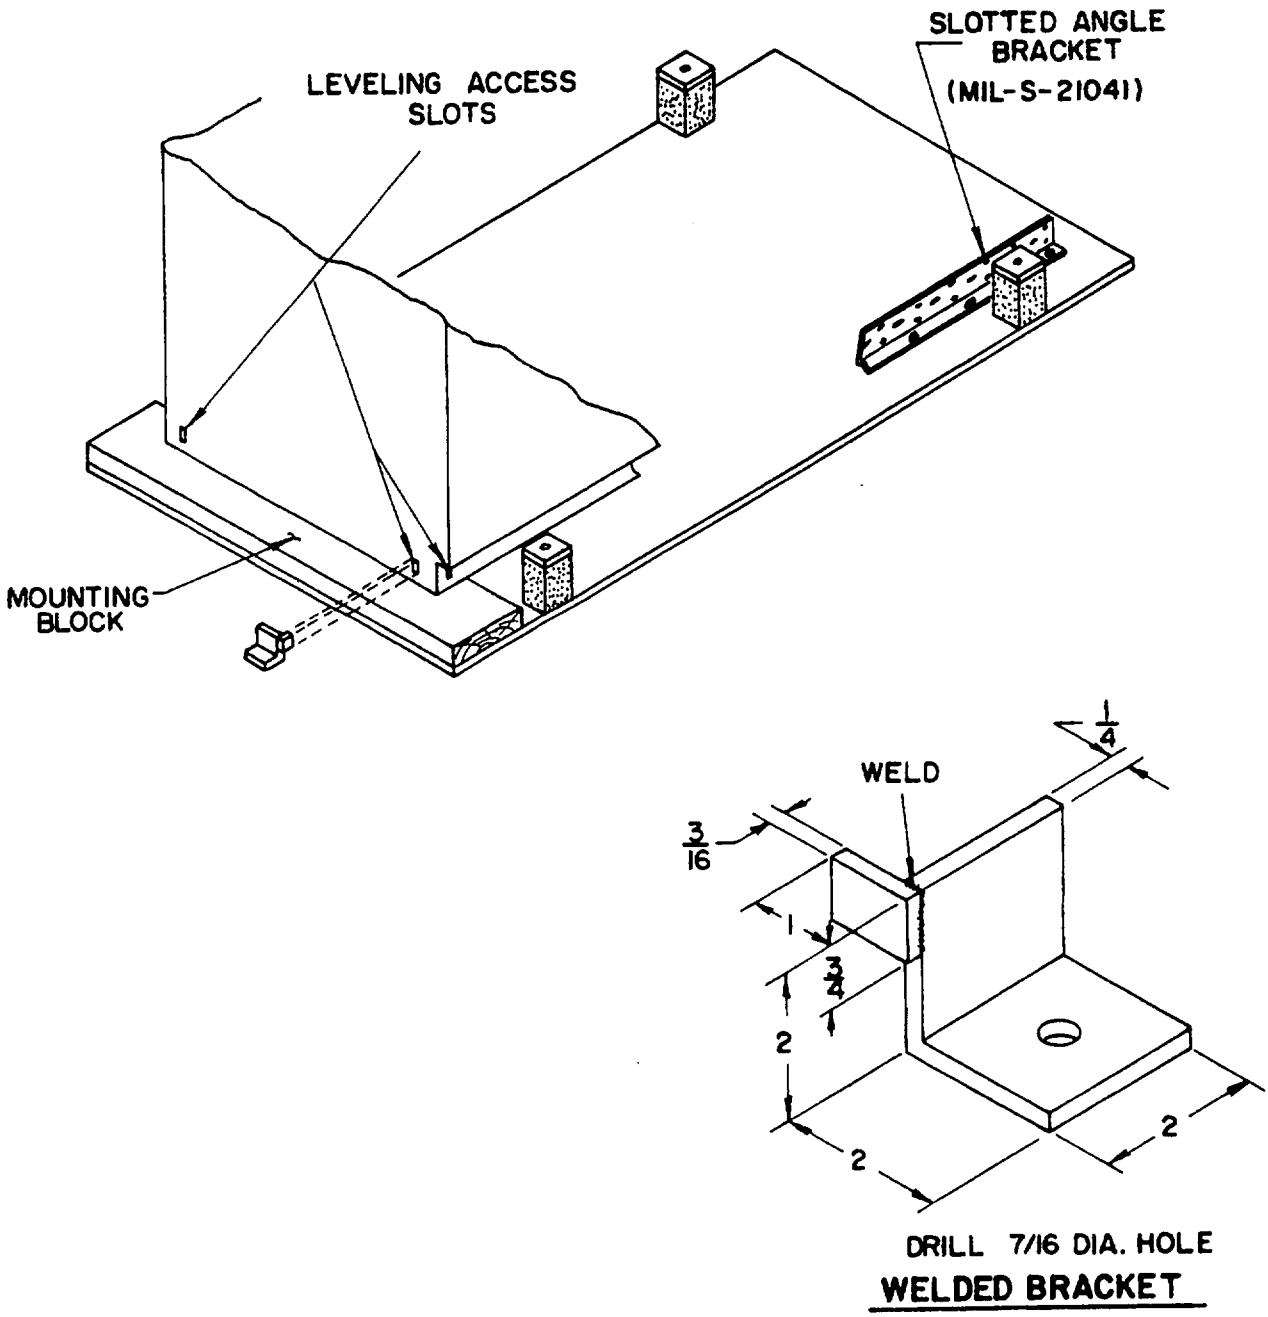


Figure 5. Mounting brackets.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:56Z
Check the source to verify that this is the current version before use.

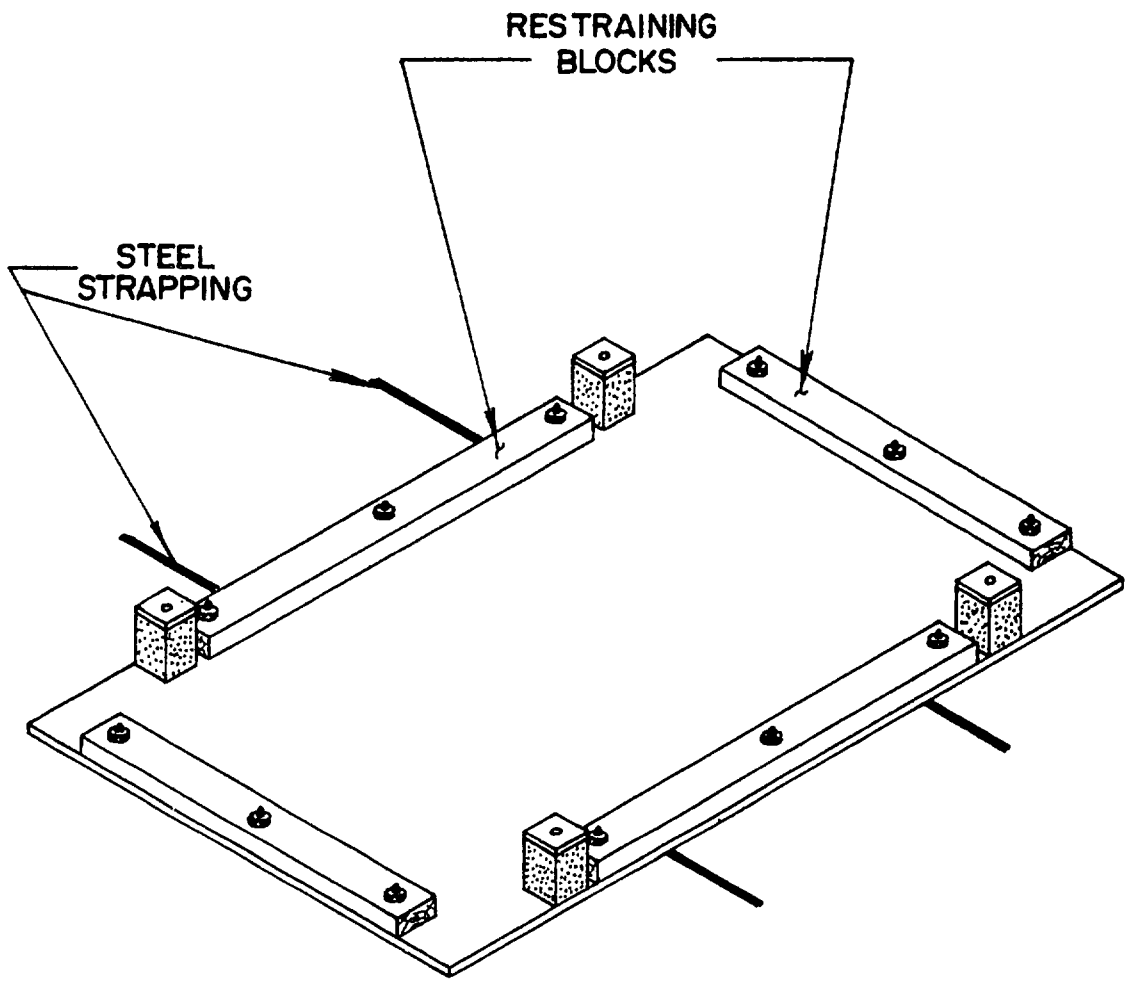


Figure 6. Restraining blocks.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:56Z
Check the source to verify that this is the current version before use.

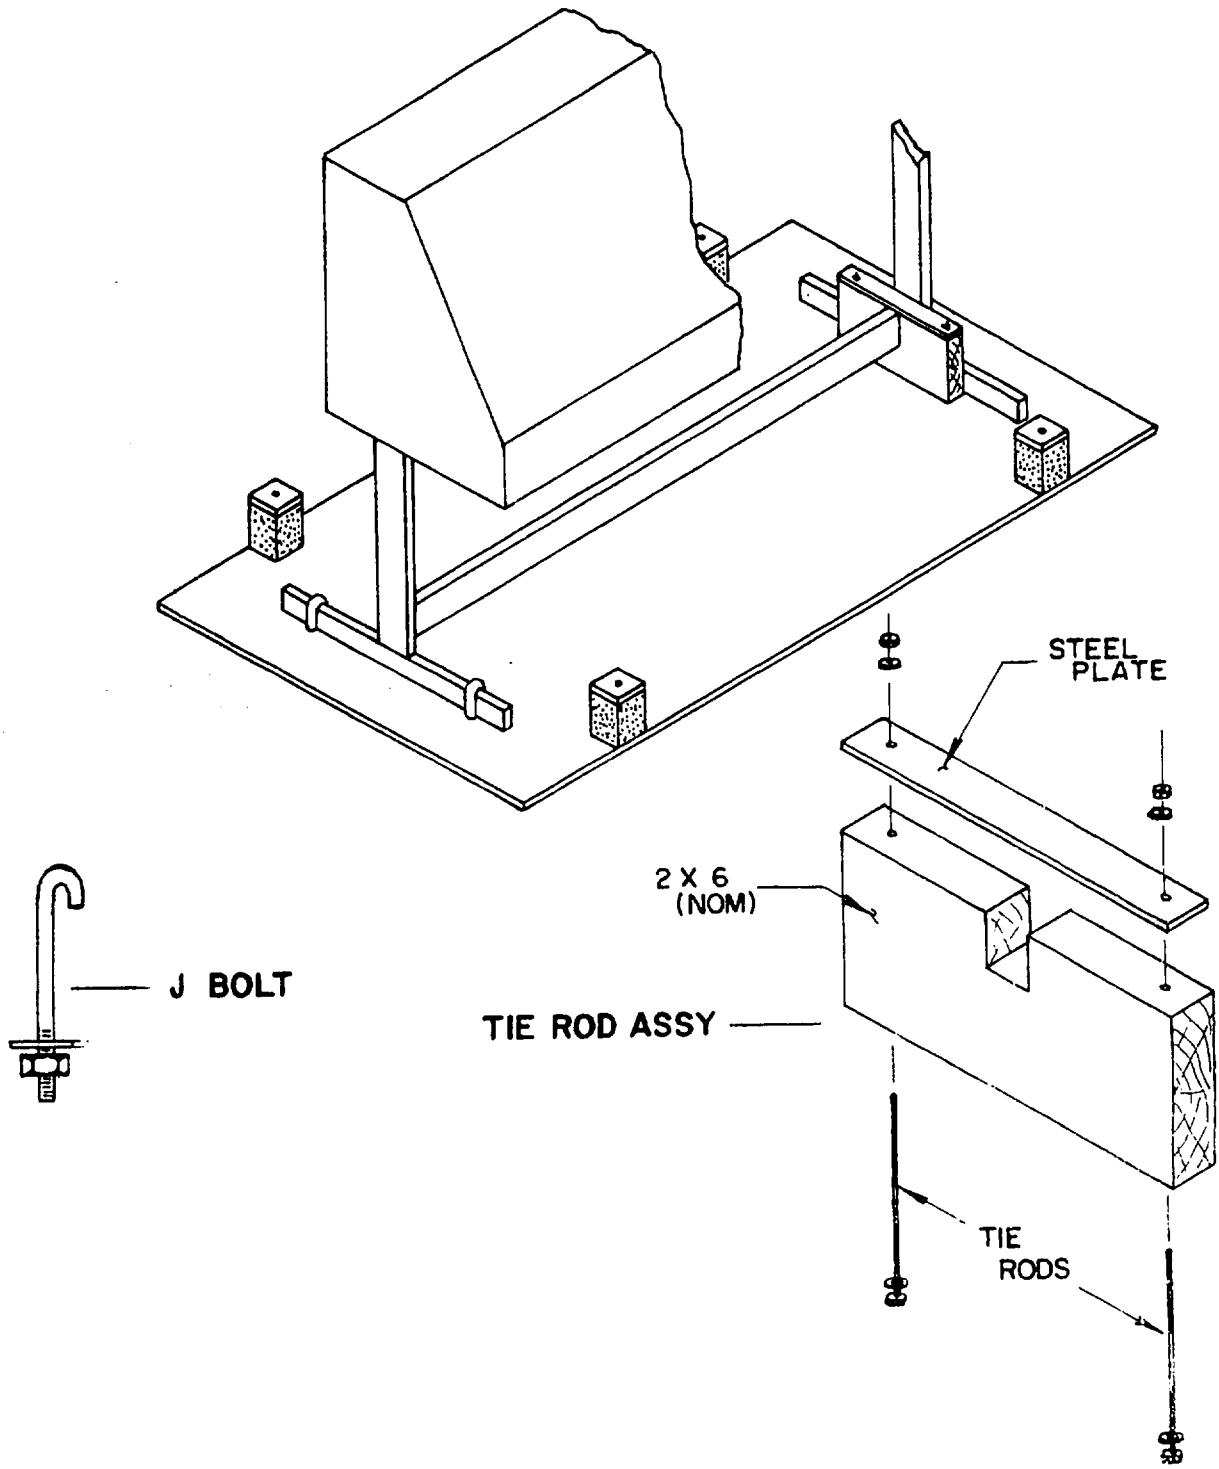


Figure 7. Mounting devices.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:56Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE AIR FORCE

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 73236 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE AIR FORCE

WRALC/DSTDL
Robins AFB Georgia 31098

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:56Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:56Z
Check the source to verify that this is the current version before use.