MIL-H-52826A (ME)
16 August 1982
SUPERSEDING
MIL-H-52826 (ME)
9 July 1974

MILITARY SPECIFICATION

HANGER, TRACK CABLE; TRAMWAY

This specification is approved for use by the Mobility Equipment Research and Development Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers one type of tramway track cable hanger.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. Unless otherwise specified, the following specifications and standards of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

FF-B-575	- Bolts, Hexagon and Square.
FF-N-836	- Nut: Square, Hexagon, Cap, Slotted, Castle, Knurled, Welding and Single Ball Seat.
FF-W-92	- Washers, Flat (Plain).
QQ-S-681	- Steel Castings.
QQ-S-781	- Strapping, Steel, and Seals.
PPP-B-601	- Boxes, Wood, Cleated-Plywood.
PPP-B-621	- Boxes, Wood, Nailed and Lock-Corner.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Mobility Equipment Research and Development Command, ATTN: DRDME-DS, Fort Belvoir, VA 22060 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 5420

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:34Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-T-704 - Treatment and Painting of Materiel.

STANDARDS

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.
MIL-STD-130 - Identification Marking of US Military Property.
MIL-STD-1186 - Cushioning, Anchoring, Bracing, Blocking and Waterproofing; with Appropriate Test Methods.
MIL-STD-1188 - Commercial Packaging of Supplies and Equipment.
MS24665 - Pin, Cotter (Split).

(Copies of specifications and standards required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. The issues of the documents which are indicated as DoD adopted shall be the issue listed in the current DoDISS and the supplement thereto, if applicable.

AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)

ANSI/ASTM A 108 - Steel Bars, Carbon, Cold-Finished, Standard Quality.

ANSI/ASTM A 109 - Steel, Carbon, Cold-Rolled Strip.

(Application for copies should be addressed to the American National Standards Institute, Inc., 1430 Broadway, New York, NY 10018.)

(Industry association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 Description. The hanger shall be as shown in figures 1 and 2, and as specified herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:34Z
Check the source to verify that this is the current version before use.

3.2 Material. The material shall be as specified herein. However, when a definite material is not specified, a material shall be used which will enable the hanger to meet the performance requirements of this specification. Acceptance or approval of any constituent material shall not be construed as a guaranty of the acceptance of the finished product (see 6.3 and 6.5). Dissimilar metals as defined in MIL-T-704 shall not be used in intimate contact with each other unless the metals are protected against galvanic corrosion.

3.2.1 Steel strip. Steel strip shall conform to ANSI/ASTM A 109, temper No. 4, finish optional, edge No. 5.

3.2.2 Steel castings. Steel castings shall conform to QQ-S-681, grade 70-36.

3.2.3 Cold rolled steel. Cold rolled steel shall conform to ANSI/ASTM A 108, UNS G10180 or UNS G10200.

3.2.4 Washers. Washers shall conform to FF-W-92, type A, grade I, class A.

3.2.5 Bolts. Bolts shall conform to FF-B-575, type III.

3.2.6 Nuts. Nuts shall conform to FF-N-836, type IV, style 17.

3.2.7 Cotter pins. Cotter pins shall conform to MS24665-355.

3.3 Identification marking. The hanger shall be identified in accordance with MIL-STD-130.

3.4 Treatment and painting. The portions of the hanger normally painted shall be cleaned, treated, and painted in accordance with MIL-T-704, type A, except that pins, bolts, and nuts shall not be painted.

3.5 Workmanship.

3.5.1 Castings. All parts, components, and assemblies of the hanger which include castings shall be clean of harmful extraneous material such as sand, dirt, sprues, scale, and flux. Rework shall be limited to procedures which do not reduce strength or affect function.

3.5.2 Metal fabrication. Metal used in fabrication shall be free from kinks and sharp bends. The straightening of material shall be done by methods that will not cause damage to the material. Corners shall be square and true. All bends shall be made with controlled means to insure uniformity of size and shape. External surfaces shall be free of burrs, sharp edges, and corners.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:34Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Component and material inspection. The contractor is responsible for insuring that components and materials used are manufactured, examined, and tested in accordance with referenced specifications and standards, as applicable.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. Quality conformance inspection (see 4.3).

b. Inspection of packaging (see 4.5).

4.3 Quality conformance inspection.

4.3.1 Sampling. Sampling for examination shall be in accordance with MIL-STD-105, inspection level III.

4.3.2 Examination. Samples selected in accordance with 4.3.1 shall be examined for the major and minor defects specified in 4.4.1. AQL shall be 0.4 percent defective for major defects and 4.0 percent defective for minor defects.

4.4 Inspection procedure.

4.4.1 Examination. The hanger shall be examined as specified herein for the following defects:

Major

101. Materials not as specified.
102. Parts missing, or not as specified.
103. Hanger not in accordance with figure 1 and 2.
104. Workmanship not as specified.

Minor

201. Identification marking missing, incomplete, or illegible.
202. Treatment and painting not as specified.

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:34Z
Check the source to verify that this is the current version before use.

4.5 Inspection of packaging.

4.5.1 Quality conformance inspection of pack.

4.5.1.1 Unit of product. For the purpose of inspection, a completed pack prepared for shipment shall be considered a unit of product.

4.5.1.2 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

4.5.1.3 Examination. Samples selected in accordance with 4.5.1.2 shall be examined for the following defects. AQL shall be 2.5 percent defective.

105.	Quantities packed together not as specified for level A or B.
106.	Containers not as specified for level A or B.
107.	Blocking and bracing not in accordance with the referenced document as specified for level A or B.
108.	Strapping not as specified for level A or B.
109.	Packing not in accordance with the referenced document for commercial.
110.	Marking missing, illegible, incorrect, or incomplete for level A, B, or commercial.

5. PACKAGING

5.1 Packing. Packing shall be level A, level B, or commercial as specified (see 6.2).

5.1.1 Level A. Unless otherwise specified (see 6.2), fifteen (15) track cable hangers shall be packed together in a close-fitting box conforming to PPP-B-601, overseas type, style optional or PPP-B-621, class 2, style optional. The hangers shall be blocked and braced within the box, in accordance with MIL-STD-1186, in a manner to prevent movement or damage. Box closure and strapping shall be in accordance with the appendix to the applicable box specification. Strapping shall conform to QQ-S-781, class 1, type I or IV, size as applicable. Unless otherwise specified (see 6.2), strapping shall be finish B. When specified (see 6.2), strapping shall be finish A.

5.1.2 Level B. Packing shall be as specified in 5.1.1 for level A, except boxes shall be domestic type or class as applicable and strapping shall be finish A.

5.1.2.1 Commercial. The track cable hangers shall be packed in accordance with MIL-STD-1188.

5.2 Marking (see 6.4).

5.2.1 Military. Marking for military levels of protection (level A or B) shall be in accordance with MIL-STD-129.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:34Z
Check the source to verify that this is the current version before use.

5.2.2 Commercial. Marking for commercial packaging shall be in accordance with MIL-STD-1188.

6. NOTES

6.1 Intended use. The hanger is intended for use on intermediate towers for supporting the tramway track cable.

6.2 Ordering data. Acquisition documents should specify the following:

a. Title, number, and date of this specification.

b. Degree of packing required (see 5.1).

c. Quantity to be packed together if other than specified (see 5.1.1).

d. When other than finish B strapping is required (see 5.1.1).

6.3 Recycled material. It is encouraged that recycled material be used, when practical, as long as it meets the requirements of this specification (see 3.2).

6.4 Preservation/packing level marking. Preservation is considered unnecessary. For purposes of preservation/packing level marking, preservation shall be designated level A.

6.5 Materiel deterioration prevention and control (MADPAC). The contracting officer should consider for inclusion in all applicable invitations for bid, requests for proposal, and contracts the following statement:


"The technical proposal shall provide assurance that all system/item parts shall be fabricated from compatible materials, suitably finished, to provide protection from corrosion and other forms of materiel deterioration. The assurance shall be in the form of a finish plan, utilizing state-of-art technology, which clearly identifies the specific finish or treatment to be used on the various components and assemblies, to provide protection against the various forms of materiel deterioration in the applicable operating and storage environments to which they may be exposed."

Custodian:
Army - ME

Preparing activity:
Army - ME

Project 5420-A327

Source: https://assist.dla.mil -- Downloaded: 202640-22T21:34Z
Check the source to verify that this is the currentversion before use.

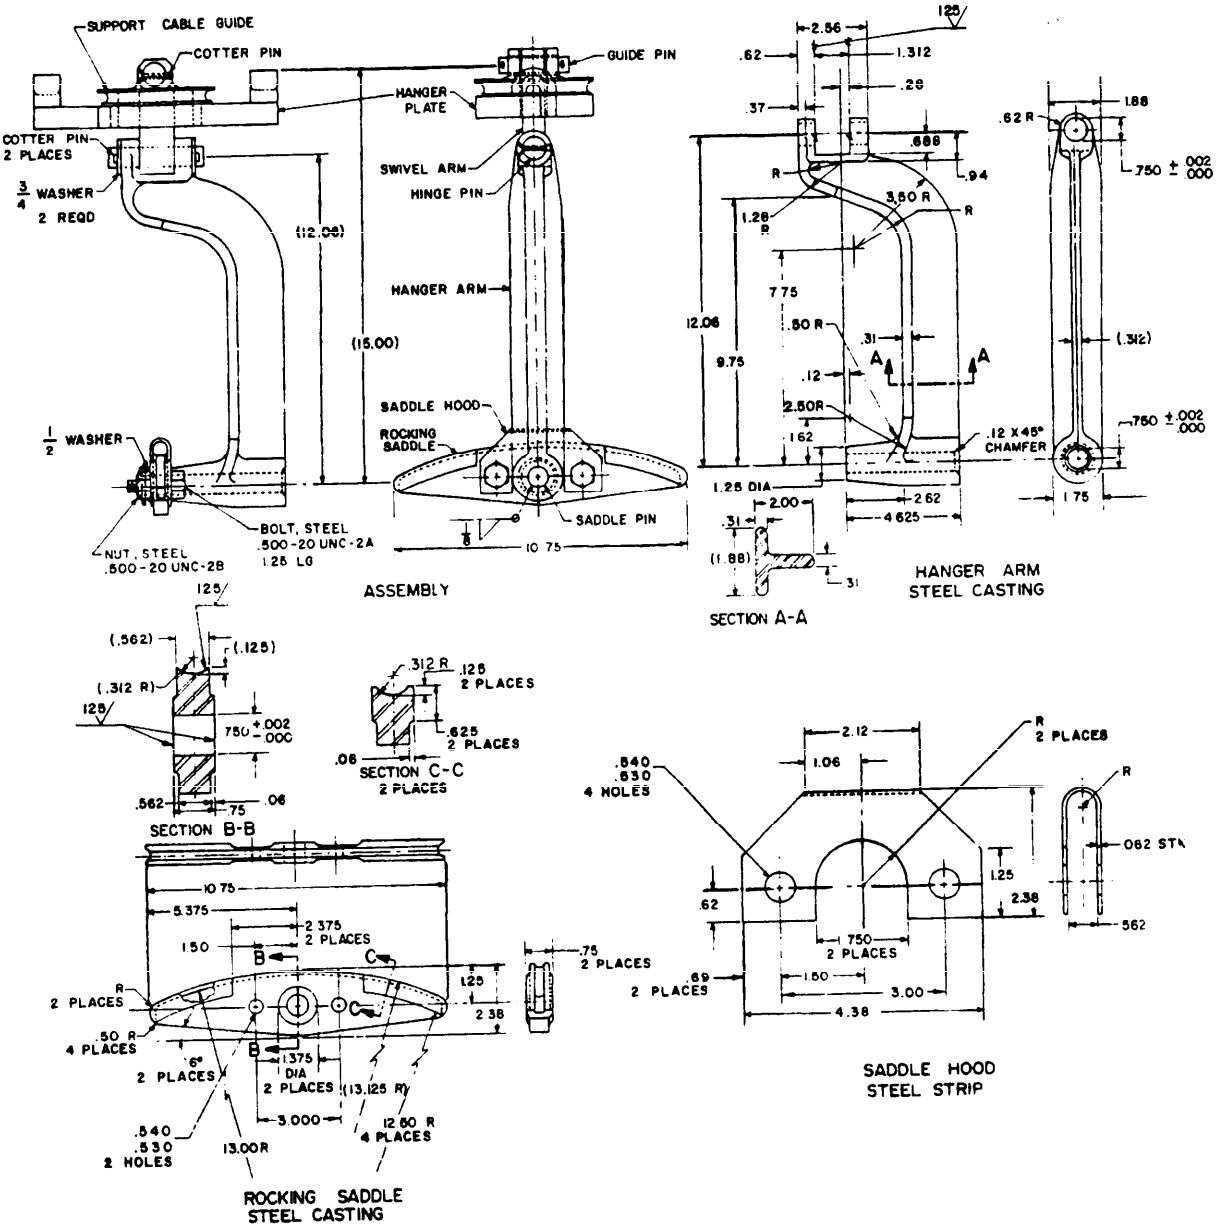

NOTES:
1. ALL DIMENSIONS ARE IN INCHES.
2. ALL RADII NOT INDICATED TO BE .25.
3. REMOVE ALL SHARP EDGES.
4. ALL FILLETS TO BE 25 R.
5. TOLERANCES, UNLESS OTHERWISE SHOWN: XX±.03, XXX±.015, ∠±3°

FIGURE 1. Track cable hanger, assembly and details.

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:34Z
Check the source to verify that this is the current version before use.

X-27338

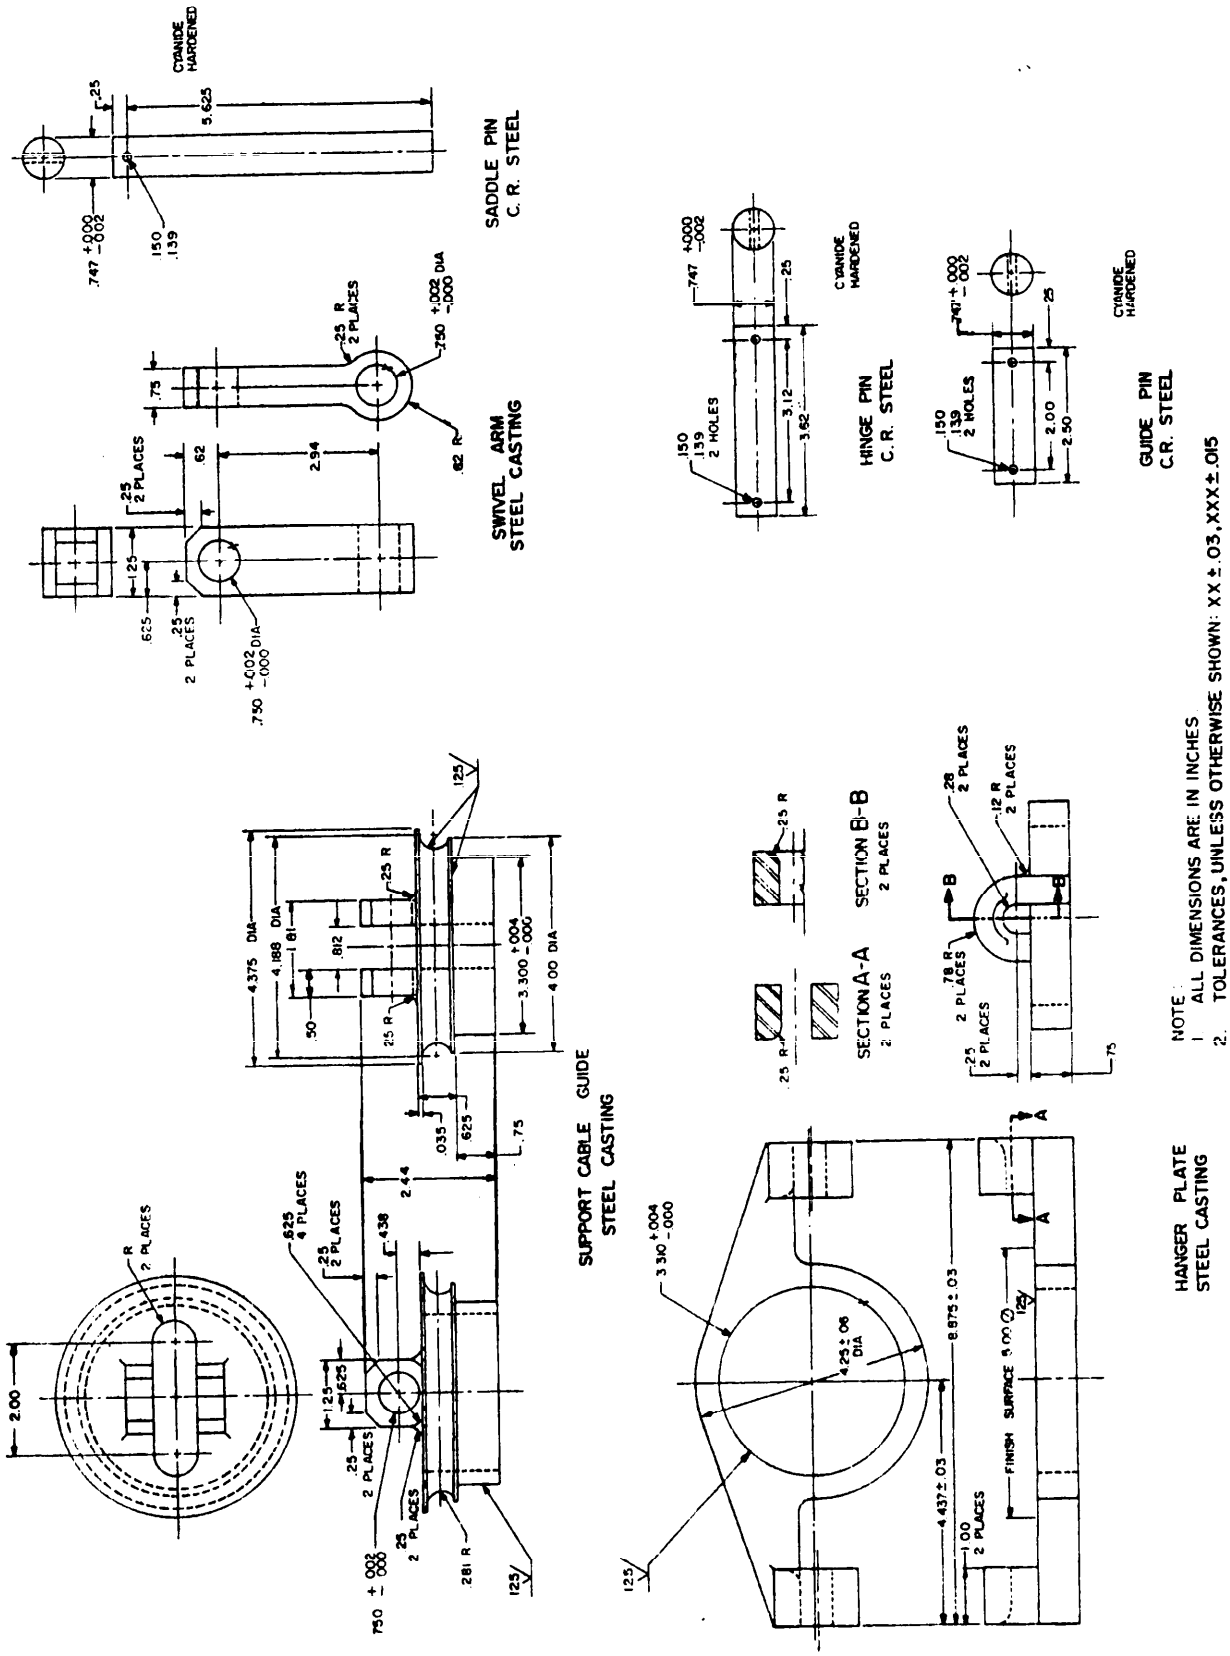


FIGURE 2. Track cable hanger details.

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:34Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-H-52826A(ME) Hanger, Track Cable; Tramway

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*	TELEPHONE NO.
	DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:34Z
Check the source to verify that this is the current version before use.

OLD

EPARTMENT OF THE ARMY

OFFICIAL BUSINESS
NALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY CARD

FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
USA Mobility Equipment R&D Command
ATTN: DRDME-DS
Ft. Belvoir, VA 22060

OLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:34Z
Check the source to verify that this is the current version before use.