
FEDERAL SPECIFICATION SHEET

FUSE, CARTRIDGE, HIGH INTERRUPTING CAPACITY, CLASS G (CURRENT-LIMITING) 300 VOLTS, 31-60 AMPERES

(DETAIL SPECIFICATION)

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

The complete requirements for procuring the fuses described herein shall consist of this document and the latest issue of Specification W-F-1814.

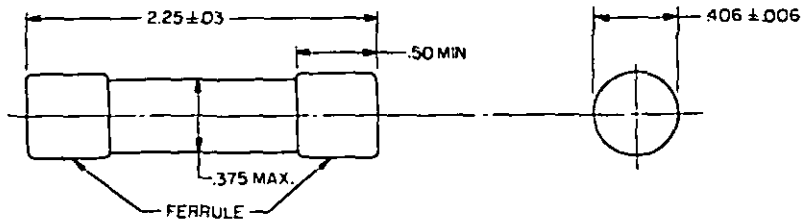

INCHES	MM
.006	.15
.03	.76
.375	9.53
.406	10.31
.50	12.70
2.25	57.15

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch ≈ 25.4 mm.
3. Minimum acceptable thickness of ferrule side wall .029 (.74 mm).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:35Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction - See figure.

Physical: Nonrenewable.
Terminals - Ferrule type.
Material - Brass, copper or copper alloy.
Strength - 5 pound-inches torque between body and ferrules.

Body:
Insulating material - Fiber, ceramic, melamine-impregnated glass fiber, or other suitable material.

Electrical:
Voltage - 300 volts or less.
Frequency - 48 to 60 hertz.
Current - See table.

Current carrying capacity - 110 percent indefinitely with temperature rise not to exceed 50°C above ambient on the body and the ferrules.

Overload interrupt:
Time delay - Shall interrupt within 1 hour at 135 percent of rated current and at 200 percent of rated current shall interrupt in not less than 12 seconds nor more than 4 minutes.
Watts loss - Average not to exceed 7.0 watts.
Interrupting capacity rating - 100,000 amperes rms symmetrical at 300 volts, 60 Hz, and power factor of 20 percent or less.

Threshold ratio - 30 maximum.

Peak let-thru current - 10,000 amperes maximum.

Maximum clearing I^2T - $25x10^3$ $ampere^2$ seconds.

Applicable fuseholders: Type II in accordance with W-F-870.

Part number: See table.

Government part number	Current rating (amps)
WF1814/04-001	35
-002	40
-003	45
-004	50
-005	60

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:35Z
Check the source to verify that this is the current version before use.

MILITARY CUSTODIANS:

Army - EL
Navy - YD
Air Force - 85

Review activities:

Army - EL, AT, ME, WC
Navy -
Air Force - 80
DSA - ES
NS

User activities:

Army - MU
Navy - OS
Air Force -

Preparing activity:

DSA - ES

Civil Agency Coordinating Activities:

AEC - AEC
Commerce - NBS
DOT - ACO, FIS
GPO - GPO
GSA - FSS
Justice - FPI
NASA - JFK, LRC
Postal - POS
VA - DMS

(Project 5920-0342-4)

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of the general specification to obtain extra copies and other documents referenced herein. Price 25 cents each:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:35Z
Check the source to verify that this is the current version before use.