INCH-POUND

W-F-1814/4A
25 November 2003
SUPERSEDING
W-F-1814/4
May 23, 1974

FEDERAL SPECIFICATION SHEET

FUSE, CARTRIDGE, HIGH INTERRUPTING CAPACITY, CLASS G (CURRENT-LIMITING) 300 VOLTS, 31-60 AMPERES

The General Services Administration has authorized the use of this federal specification sheet by all federal agencies.

The complete requirements for procuring the fuses described herein shall consist of this document and the latest issue of Specification W-F-1814.

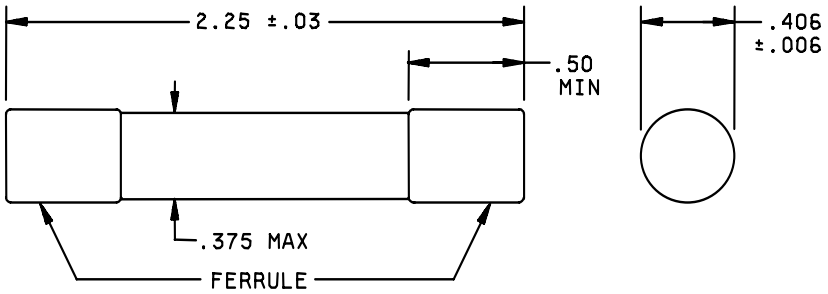

Inches	mm
.006	.15
.03	.76
.375	9.53
.406	10.31
.50	12.70
2.25	57.15

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Minimum acceptable thickness of ferrule side wall .029 (.74 mm).
4. Unless otherwise specified, tolerances are ±0.02 (0.51 mm) for two-place decimals and ±0.005 (0.13 mm) for three-place decimals.

FIGURE 1. Configuration and dimensions.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:35Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Interface and physical dimensions: See figure 1.

Physical - Nonrenewable.

Terminals - Ferrule type.

Material - Brass, copper, or copper alloy.

Strength - 5 pound-inches torque between body and ferrules.

Body:

Insulating material - Fiber, ceramic, melamine-impregnated glass fiber, or other suitable material.

Electrical:

Voltage - 300 volts or less.

Frequency - 48 to 60 hertz.

Current - See table I.

Current carrying capacity - 110 percent indefinitely with temperature rise not to exceed 50°C above ambient on the body and the ferrules.

Overload interrupt:

Time delay - Shall interrupt within 1 hour at 135 percent of rated current and at 200 percent of rated current shall interrupt in not less than 12 seconds nor more than 4 minutes.

Watts loss - Average not to exceed 7.0 watts.

Interrupting capacity rating - 100,000 amperes rms symmetrical at 300 volts, 60 Hz, and power factor of 20 percent or less.

Threshold ratio - 30 maximum.

Peak let-thru current - 10,000 amperes maximum.

Maximum clearing I^2T - $25x10^3$ $ampere^2$ seconds.

Applicable fuseholders: Class G in accordance with UL 512.

Part number: See table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:35Z
Check the source to verify that this is the current version before use.

TABLE 1. Electrical characteristics.

Government part number	Current rating (amps)
WF1814/04-001	35
WF1814/04-002	40
WF1814/04-003	45
WF1814/04-004	50
WF1814/04-005	60

MILITARY INTERESTS:

Custodians:
Army – CR
Navy - YD
Air Force - 11
DLA - CC

Review Activities:
Army - AT, CR4
Navy - OS
NSA - NS

CIVIL AGENCY COORDINATING ACTIVITIES:

GSA - 7FXE
NASA - NA

Preparing activity:
DLA - CC

(Project 5920-0790)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:35Z
Check the source to verify that this is the current version before use.