MIL-B-1290C

11 August 1967
SUPERSEDING
MIL-B-1290B(GL)
17 December 1963

MILITARY SPECIFICATION

BAG, COTTON DUCK, COAL, 1-BUSHEL

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers an olive drab, reinforced, cotton duck coal bag in one type and size, with a capacity of one bushel. Carrying handles are provided at the top of the bag and a tipping handle is located on each side near the bottom to aid in emptying the bag.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

V-T-285	-	Thread, Polyester
FF-R-556	-	Rivets, Solid, Small; Rivets, Split, Small; Rivets, Tubular, Small; and Caps, Rivets; General Purpose
CCC-C-419	-	Cloth, Duck, Cotton, Unbleached, Plied-Yarns, (Army and Numbered)
CCC-D-950	-	Dyeing and Aftertreating Processes for Cotton Cloths
DDD-L-20	-	Label; for Clothing, Equipage, and Tentage, (General Use)
PPP-B-636	-	Box, Fiberboard

MILITARY

MIL-W-530	-	Webbing and Tape, Textile, Cotton, General Purpose, Natural or in Colors

FSC 8105

Source: https://assist.dla.mil -- Downloaded: 202640-16T13:05Z
Check the source to verify that this is the current version before use.

STANDARDS

FEDERAL

Fed. Std. No. 751 - Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes

MIL-STD-129 - Marking for Shipment and Storage

DRAWING

ARMY NATICK LABORATORIES

5-3-13 - Bag, Cotton Duck, Coal, 1-Bushel

(Figure 1 is a miniature reproduction of referenced drawing and is attached for information purposes only.)

(Copies of specifications, standards and drawings required by the suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Preproduction sample.- Unless otherwise specified (see 6.2), before production is commenced, a sample of the coal bag covered by this specification shall be submitted or made available to the contracting officer or his authorized representative for approval in accordance with 4.2. The approval of the preproduction sample authorizes the commencement of production, but does not relieve the supplier of responsibility for compliance with all applicable provisions of this specification. The preproduction sample shall be manufactured in the same facilities to be used for the manufacture of the production items.

3.2 Materials.-

3.2.1 Cloth, duck, cotton.- The cloth before finishing shall be No. 4 hard texture duck conforming to type I of CCC-C-419.

3.2.1.1 Color and treatment.- The finished cloth shall conform to type I, class B, shade olive drab No. 7 of CCC-D-950.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:05Z
Check the source to verify that this is the current version before use.

3.2.2 Webbing, textile, cotton.- The webbing shall conform to type III, class 4, 1-inch width, shade olive drab No. 7 of MIL-W-530.

3.2.3 Thread, polyester.- The thread for all stitching shall conform to type I, class 1, sub-class B, size FF of V-T-285. The thread shall be dyed shade S-1 (Cable No. 66022) and shall show fastness to chlorine bleaching equal to or better than the standard shade sample (see 6.3). If no standard sample is available, the thread shall show good fastness to chlorine bleaching.

3.2.4 Rivets, tubular without caps.- The tubular rivets shall be 7/16 inch nominal shank length, deep drilled, and shall conform to type XII, class 3, grade F, black chemical finish of FF-R-556.

3.3 Construction.- The construction shall conform to Drawing No. 5-3-13 and as specified herein.

3.3.1 Stitching, machine.- All machine stitching shall conform to type 301 of Fed. Std. No. 751, 6 to 8 stitches per inch.

3.3.1.1 Thread breaks.- Thread breaks in stitching shall be overstitched not less than 1 inch at each break.

3.3.1.2 Stitching ends.- Stitching ends shall be overstitched not less than 1 inch except where ends are turned under in a hem or are held down by other stitching.

3.3.1.3 Skipped stitches.- Where 2 or more skipped stitches occur consecutively, skipped stitches shall be overstitched not less than 1 inch.

3.3.1.4 The addition of any lubricant to the polyester sewing thread prior to or during the sewing operation is prohibited.

3.3.2 Setting of tubular rivets.- The holes shall be formed by the rivets when driven into the material and not punched prior to insertion of the rivets.

3.4 Marking.- All marking shall conform to DDD-L-20.

3.4.1 Identification marking.- The identification marking shall conform to type IV, class 5 and shall be located as shown on Drawing 5-3-13. In addition, the item nomenclature and the letters "US" shall be printed or stenciled in the size characters and in the locations shown on Drawing 5-3-13 and shall conform to type IV, class 9 labels. Fastness of class 9 marking shall be as specified for class 5 marking.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:05Z
Check the source to verify that this is the current version before use.

3.5 Workmanship.- Cloth components shall be clean and free of holes, cuts, tears or cloth defects such as multiple floats or broken or missing yarns. Thread tension shall be maintained so that no runoffs, twists, pleats or open seams shall result. All thread ends shall be trimmed to 1/2 inch or less. Care shall be taken to see that no needle chews occur. Metal components shall be free of burrs.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Preproduction sample inspection.- When a preproduction sample is required, it shall be examined for the defects listed in table I and dimensions specified.

4.3 Sampling for inspection.- Sampling for inspection shall be made in accordance with the provisions set forth in MIL-STD-105, unless otherwise indicated hereinafter.

4.3.1 Component and material inspection.- In accordance with 4.1 above, the supplier is responsible for insuring that components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document.

4.3.2 Process inspection.- Inspection shall be made to determine that the following are as specified:

a. There shall be no lubrication of polyester thread prior to or during the sewing operation for compliance with 3.3.1.3.
b. Examination to determine that holes have not been punched to receive rivets for compliance with 3.3.2.

4.3.3 End product inspection.- A lot shall consist of all completely fabricated bags offered for inspection at one time. The sample unit shall be one completely fabricated bag. The inspection levels and acceptable quality levels (AQL's) shall be as specified in 4.3.3.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:05Z
Check the source to verify that this is the current version before use.

4.3.3.1 Visual examination.- The completely fabricated bag shall be examined for defects in table I.

TABLE I - Classification of defects for visual characteristics

Examine	Defect	Classification Major	Minor A	Minor B
Fabric	Cut, tear, or hole:			
	- greater than 1/8 inch in length or diameter	X		
	- greater than 3/32 inch but not greater than 1/8 inch in length or diameter		X	
	- more than 5 holes 3/32 inch or less in length or diameter			X
	Broken or missing yarns, multiple floats or open place clearly visible at normal inspection distance (approximately 3 feet)		X	
Webbing	Frayed or scalloped edge		X	
Rivets	Broken	X		
	Malformed:			
	- fails to perform intended function	X		
	- but will perform intended function		X	
	Corroded area (finish omitted)			X
	Burr or sharp edge which may cause injury in handling or damage to fabric	X		
	Insecurely clinched			X
	Clinched excessively tight, cutting fabric		X	
Seams and stitching	Open seam:			
	- more than 1/4 inch but not more than 1 inch			X
	- more than 1 inch		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:05Z
Check the source to verify that this is the current version before use.

TABLE I - Classification of defects for visual characteristics (cont'd)

Examine	Defect	Classification Major	Minor A	Minor B
Seams and stitching (cont'd)				
	Note: A seam shall be classified as open when one or more stitches joining a seam are broken or when two or more consecutive skipped or run-off stitches occur and are not overstitched. On double stitched seams, a seam shall be classified as open when either one or both sides of a seam are open.			
	Raw edges caught in stitching:			
	- more than 1 inch but not more than 3 inches			X
	- more than 3 inches		X	
	Thread breaks overstitched less than 1 inch			X
Skipped stitches	Needle chews resulting in cut, tear, or hole (see cut, tear or hole) skipped stitches overstitched less than 1 inch (where 2 or more skipped stitches occur consecutively)			X
	Note: Skipped stitches not overstitched shall be classified as open seams.			
	Mends or darns		X	
	One or more required rows of stitching omitted	X		
Stitching ends	Overstitched less than 1 inch (except where ends are held down by other stitching or turned under in a hem)		X	
Seam	Seams pleated			X

Source: https://assist.dla.mil -- Downloaded: 202610-16T13:05Z
Check the source to verify that this is the current version before use.

TABLE I - Classification of defects for visual characteristics (cont'd)

Examine	Defect	Classification Major	Minor A	Minor B
Seams and stitching (cont'd)				
Seam type	Wrong seam type	X		
Stitch type	Wrong stitch type	X		
Stitch tension	Loose resulting in an exposed bobbin or top thread for more than 2 inches		X	
	Tight as evidenced by puckering of fabric on seams for more than 2 inches		X	
Stitches per inch	One stitch less than minimum specified			X
	Two or more stitches less than minimum specified		X	
	One or more stitches in excess of maximum specified			X
Note:	Variation in the number of stitches per inch caused by the operator speeding up the machine and pulling the fabric in order to sew over heavy places or in turning corners shall be classified as follows: a. Within the minor A defect classification - minor B defect b. Within the minor B defect classification - no defect			
Stitching margin	Larger than specified by more than 3/16 inch: - for less than 2 inches in length			X
	- for 2 inches or more in length		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:05Z
Check the source to verify that this is the current version before use.

TABLE I - Classification of defects for visual characteristics (cont'd)

Examine	Defect	Classification Major	Minor A	Minor B
Components and assembly	Any component part not fabricated of applicable referenced material		X	
Hems	Twisted or pleated		X	
	Constructed with partial turnunder when a double turnunder is required		X	
Reinforcements	Improperly applied, causing excessive fullness on reinforcements or reinforced parts		X	
Marking	Omitted, incorrect, illegible or misplaced		X	
Construction details				
Handles	Improperly or loosely applied		X	
Tipping handle	Not constructed as specified (single strip of webbing used)		X	
Cleanness	Grease or oil stains, thread ends not trimmed throughout			X

4.3.3.2 Dimensional examination.- Any dimension not within the specified tolerance shall be classified as a defect.

4.3.3.3 Inspection levels and AQL's.- The inspection levels and AQL's, expressed in terms of defects per hundred units, shall be as follows:

Examination	Inspection level	AQL's	
For defects applicable to table I	II	2.5	Major
		6.5	Major and minor A
		15.0	Totals (Major, A & B defects combined)

Source: https://assist.dla.mil -- Downloaded: 202610-16T13:05Z
Check the source to verify that this is the current version before use.

Examination	Inspection level	AQL's
For defects applicable to 4.3.3.2	S-3	10.0 One class

4.3.4 Examination of preparation for delivery requirements.- An examination shall be made to determine that packaging, packing and marking requirements of section 5 of this specification are complied with. Defects shall be scored in accordance with table II. The sample unit shall be one shipping container fully prepared for delivery, with the exception that it need not be sealed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot shall be the number of shipping containers offered for delivery at one time. The inspection level shall be S-2 and the AQL shall be 2.5 expressed in terms of defects per hundred units.

TABLE II - Examination of preparation for delivery

Examine	Defect
Marking	Omitted, incorrect, illegible, of improper size, location, sequence or method of application
Materials	Any component missing Any component damaged
Workmanship	Inadequate application of components, such as incomplete closure of container flaps, improper taping, loose strapping Bulging or distortion of containers
Content	Number of units per container is more or less than required

5. PREPARATION FOR DELIVERY

5.1 Packaging.- Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A.- Each coal bag shall be smoothed out flat with all air pockets removed. Ten coal bags shall be stacked one on top of another and reversed top to bottom to form a bundle. Each bundle shall be securely tied approximately 6 inches from each end with cotton tape or twine.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:05Z
Check the source to verify that this is the current version before use.

5.1.2 Level C.- Coal bags shall be packaged to afford adequate protection against physical damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets this requirement.

5.2 Packing.- Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A.- Twenty coal bags, packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC, V3c or V3s of PPP-B-636. Each container shall be closed, waterproofed, and reinforced with flat strapping or tape banding in accordance with the appendix of the container specification.

5.2.2 Level B.- Twenty coal bags, packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC, type CF or SF, variety SW, class domestic, grade 275 of PPP-B-636. Each container shall be closed in accordance with method II in the appendix of the container specification.

5.2.3 Level C.- The coal bags, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with rules or regulations of carriers applicable to the mode of transportation.

5.3 Marking.- In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use.- The coal bag covered by this specification is used at posts, camps and stations for the manual carrying of coal.

6.2 Ordering data.- Procurement documents should specify the following:

a. Title, number and date of this specification
b. Stock number
c. When preproduction sample is not required (see 3.1)
d. Selection of applicable levels of packaging and packing (see 5.1 and 5.2)

6.3 For access to a standard shade sample of polyester thread, address the procuring office issuing the invitation for bids.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:05Z
Check the source to verify that this is the current version before use.

6.4 Asterisks are not used in this revision to identify changes with respect to the previous issue, due to extensiveness of the changes.

Custodians:

Army - GL
Navy - SA
Air Force - 69

Preparing activity:

Army - GL

Project No. 8105-0175

Review activities:

Army - GL
Navy - SA
Air Force - 84

User activity:

Army - MD

Review and User information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current Federal Supply Classification Listing of DOD Documents.

☆U.S. GOVERNMENT PRINTING OFFICE. 1977—703-020/5822

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:05Z
Check the source to verify that this is the current version before use.

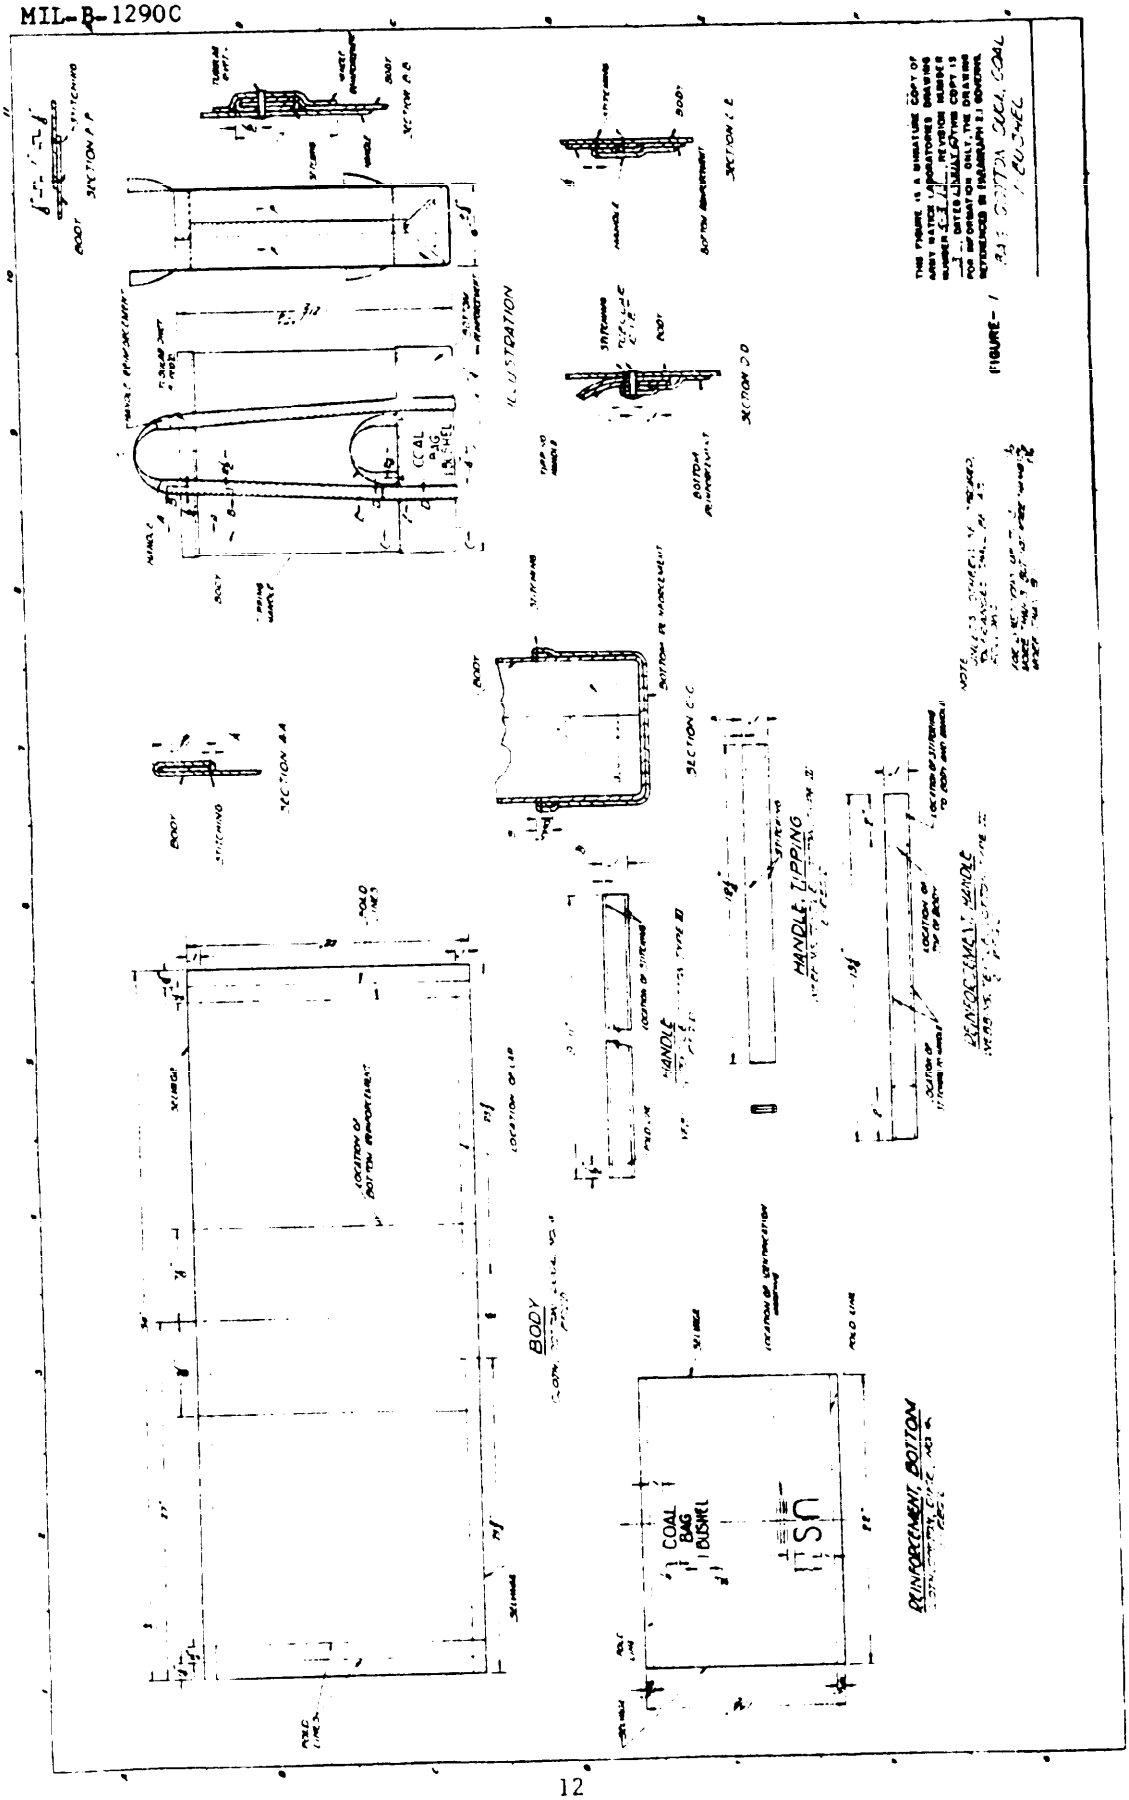


FIGURE 1. Bushel coal bag.

Source: https://assist.dla.mil -- Downloaded: 202610-16T13:05Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
U. S. Army Natick Laboratories
Natick, Massachusetts 01762

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

Commanding General
U. S. Army Natick Laboratories
ATTN: AMXRE-SS
Natick, Massachusetts 01762

FOLD

"to detach this form, cut along this line"

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:05Z
Check the source to verify that this is the current version before use.

"to detach this form, cut along this line"

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity.

SPECIFICATION

Bag, Cotton Duck, Coal, 1-Bushel MIL-B-12900

ORGANIZATION	CITY AND STATE

CONTRACT NO.	QUANTITY OF ITEMS PROCURED	DOLLAR AMOUNT
		$

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)*	DATE

DD FORM 1 OCT 64 1426

Source: https://assist.dla.mil -- Downloaded: 20261O-16T13:05Z
Check the source to verify that this is the current version before use.