MILITARY SPECIFICATION

CUPS, OIL, LUBRICATING, AND OILERS, SELF-FEEDING

This Amendment forms a part of Military Specification MIL-C-1258D dated 14 February 1983, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 6

3.12 Delete and substitute:

3.12 Type G, ball valve (drive) straight or shoulder (oil hole cover). As specified (see 6.2), the oil cup shall be similar to style A (with flange) or style B (without flange) (see figure 6). The oil cups shall conform to the dimensions shown in table VI. The oil filling hole shall be closed by a spring-loaded ball. The spring shall meet the requirements of 3.1.3. The ball shall seat firmly and uniformly and be of oil-resistant material, balls shall not wick oil.

TABLE VI. Delete and substitute:

TABLE VI. Type G, ball valve (drive) straight or shoulder (oil hole cover) dimensions.

Size	1	2	3	4	5
Nominal size	3/16	1/4	5/16	3/8	1/2
Recommended hole size maximum	.189	.252	.314	.377	.502
minimum	.187	.250	.312	.375	.500
A. Flange diameter1/					
maximum	.233	.309	.365	.437	.562
minimum	.202	.278	.335	.406	.531
B. Drive length					
maximum	.289	.306	.365	.429	.552
minimum	.227	.244	.290	.367	.490
C. Overall length					
maximum	.331	.352	.400	.500	.617
minimum	.269	.290	.330	.406	.555
D. Drive Diameter					
maximum	.193	.255	.318	.380	.505
mininum	.190	.253	.316	378	.503
Size code	01	02	03	04	05

1/ Does not apply to style B (see figure 6)

Body material code: (see 3.1.1)
BR Brass
BZ Bronze
CU Copper Alloy
OP Optiional
ST Drawn or pressed steel

FSC 4730

Source: https://assist.dla.mil -- Downloaded: 202640-16T13:02Z
Check the source to verify that this is the currentversion before use.

Figure 6 Delete and substitute:

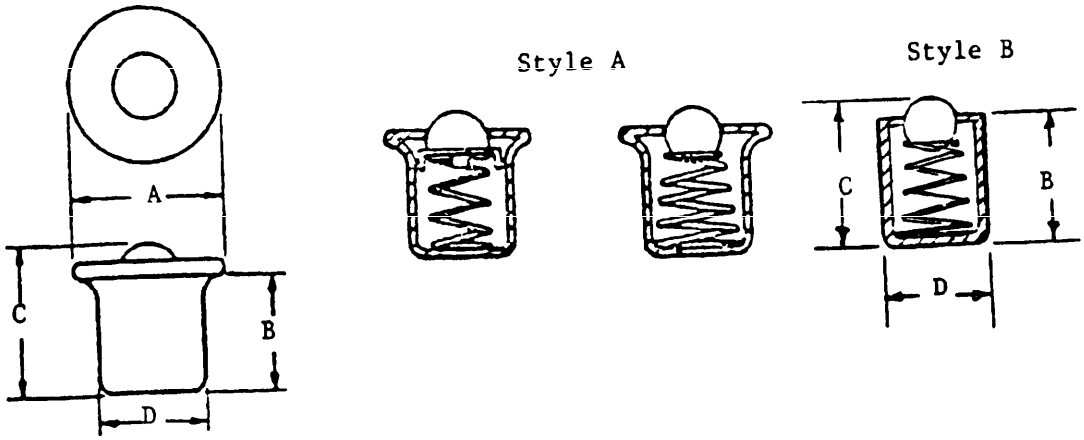


Figure 6. Type G, ball valve (drive).

Custodians:

Army - AR
Navy - YD
Air Force - 99

Review Activities:

Army - MI
Air Force - 11
DLA - CS

User Activities:

Army - ER
Navy - MC

Preparing Activity:

Navy - YD

Project No. 4730-0568

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:02Z
Check the source to verify that this is the current version before use.