MIL-M-1263D
31 March 1975
SUPERSEDING
MIL-M-1263C
10 December 1969

MILITARY SPECIFICATION

MEGAPHONE, HAND

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope.- This specification covers the requirements for hand megaphones.

1.2 Classification.- The megaphones shall be of one type only in the following lengths (see 6.2):

18 inches
32 inches

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

PPP-B-636 - Boxes, Shipping, Fiberboard

MILITARY

MIL-F-495 - Finish, Chemical, Black; for Copper Alloys

STANDARDS

FEDERAL

FED-STD-595 - Colors

FSC 8465

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:02Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage

(Copies of specifications, standards, drawings and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

LAWS AND REGULATIONS

U.S. POSTAL SERVICE MANUAL

(Copies of the manual may be obtained from the Superintendent of Documents, U.S. Government Printing OFfice, Washington, D.C. 20402.)

2.2 Other publications.- The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issues in effect on date of invitation for bids or request for proposal shall apply.

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies should be addressed to American Trucking Associations, Inc., Tariff Order Section, 1616 P Street, N.W., Washington, D.C. 20036.)

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606.)

3. REQUIREMENTS

3.1 Guide sample.- Samples, when furnished, are solely for guidance and information to the supplier (see 6.3). Variations from this specification may appear in the samples, in which case this specification shall govern.

3.2 First article approval.- The requirements for the first article will be as specified by the procuring activity (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:02Z
Check the source to verify that this is the current version before use.

3.3 Materials.-

3.3.1 Fiber sheet.- The body of the megaphone shall be made of a resin impregnated fiber sheet material; 0.04 (± 0.004) inch thick conforming to the requirements specified in Table I when tested as specified in 4.3.1. The color shall be dark green, approximating shade number 24087 of FED-STD-595.

Table I - Fiber sheet requirements

Characteristics	Requirements Minimum	Maximum
Tensile strength (lbs/sq in)		
Length direction	6,000	-
Width direction	6,000	-
Specific gravity	1.25	-
Water absorption (percent)	-	4.0

3.3.2 Plastic.- The handle, mouthpiece, and base-rim shall be made of any non-toxic plastic material pigmented black.

3.3.2.1 Handle.- The handle shall conform to the shape and dimensions as shown in Figure 1.

3.3.2.2 Mouthpiece.- The mouthpiece shall conform to the shape and dimensions as shown in Figure 2.

3.3.2.3 Base-rim.- The base-rim shall conform to the shape and dimensions as shown in Figure 3.

3.3.3 Rivets.- The rivets shall be fabricated of brass and shall be of the split oval-head type. The rivets may be unfinished; black chemical finished in accordance with the requirements specified in MIL-F-495; or be nickel plated. The rivets used for the body seam shall be 3/16 (± 1/16) inch diameter. The rivets used to secure the mouthpiece, handle, and base-rim to the body shall be 5/16 (± 1/16) inch diameter. The length of the rivets shall be sufficient to provide a secure clinch.

3.3.4 Cement.- The cement used to join the mouthpiece and the base-rim to the body shall be waterproof.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:02Z
Check the source to verify that this is the current version before use.

3.3.5 Label.- The label shall be of white paper and backed with a permanent type pressure-sensitive adhesive. The label shall measure 3 1/2 inches by 2 1/2 inches and shall be marked in 1/4 inch black letters with the following information:

Name of item and length - Megaphone, Hand 18" (Example)
Name of supplier
Stock number - 8465-00-000-0000 (Example)
Contract number - DSA-100-000-0000 (Example)
U.S. PROPERTY

3.4 Design.- The megaphone shall be in the shape of a truncated cone of 22 (± 1/2) degrees. The body shall be one-piece, with a uniformly riveted seam. A handle shall be riveted to the seam. A mouthpiece and base-rim shall be riveted or cemented to the respective ends of the megaphone (see Figure 4).

3.5 Figures.- Figures 1 through 4 are furnished for information purposes only. To the extent of any inconsistencies between the written specification and the figures, the written specification shall govern.

3.6 Construction.- The megaphone shall be constructed in accordance with the operations listed in Table II. The supplier is not required to follow the exact sequence of operations listed, provided the megaphone is identical with those produced by following the exact sequence as shown.

Table II - Construction of the megaphone

1. Overlap the lengthwise ends of the fiber sheet 3/8 to 1/2 inch to form the body of the megaphone; secure with rivets spaced 1 1/8 (± 1/8) inches apart along the entire length of the seam. The heads of the rivets shall finish on the outside.

2. Cement the mouthpiece to the megaphone opening; or, as an alternate the mouthpiece may be secured with 4 rivets equally spaced around the circumference; each 1/4 (± 1/8) inch from the base of the mouthpiece. The heads of the rivets shall finish on the outside.

3. Cement the base-rim to the megaphone; or, as an alternate, secure the base-rim with a minimum of 4 rivets for the 18 inches long megaphone and a minimum of 8 rivets for the 32 inches long megaphone equally speced around the circumference. The heads of the rivets shall finish on the outside.

4. Secure the handle to the megaphone body, on the body seam, with a rivet at each end of the handle. The heads of the rivets shall finish on the outside. Measured from the top of the mouthpiece to the top rivet, the distance shall be 10 (± 3/4) inches for the 18 inches long megaphone and 18 (± 3/4) inches for the 32 inches long megaphone.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:02Z
Check the source to verify that this is the current version before use.

5. Secure the label to the inside of the megaphone. The bottom edge of the label shall be parallel to the bottom edge of the megaphone and not less than 1 inch nor more than 2 inches from the megaphone bottom edge.

3.7 Finish.- The finish of the megaphone body shall be smooth.

3.8 Resistance to salt water.- The finished megaphone, when tested as specified in 4.4, shall show no evidence of separation of the component parts or discoloration of the mouthpiece, handle or base-rim. The body material shall show no swelling, softening, discoloration, tackiness or fiber loss.

3.9 Workmanship.- The finished megaphones shall conform to the quality established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements as specified herein unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Certificate of compliance.- Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 First article inspection.- The first article submitted in accordance with 3.2 shall be inspected as specified in 4.3.2 for compliance with design, construction, workmanship, dimensional requirements, and end item testing.

4.3 Inspection.- Sampling for inspection shall be in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:02Z
Check the source to verify that this is the current version before use.

4.3.1 Component and material inspection.- In accordance with 4.1, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document. In addition, the supplier shall furnish a certificate of compliance for the requirements specified in 3.3.1, 3.3.2, 3.3.3 and 3.3.4.

4.3.2 Examination of the end item.- Examination of the end item shall be in accordance with 4.3.2.1 and 4.3.2.2. The applicable inspection levels and acceptable quality levels (AQL's) shall be as indicated in 4.3.3. The sample unit shall be one completely fabricated megaphone. The lot size shall be expressed in units of megaphones.

4.3.2.1 Visual examination.- The megaphones shall be examined for defects in accordance with the list below:

Examine	Defect
Material	Any evidence of separation or delamination of the fiber sheet
	Any cut, hole or crack in the fiber sheet
	Objectionable odor of any component
	Color of fiber sheet, mouthpiece, handle or base-rim not as specified
	Fiber sheet body not finished smooth
	Mouthpiece, handle or base-rim cracked, chipped or broken
Construction	Mouthpiece, handle or base-rim missing
	Body, mouthpiece, handle or base-rim deformed
	Overlapped edges of the body not riveted together
	Rivets along body seam not spaced as specified
	Handle not secured to body by rivets
	Mouthpiece and base-rim not cemented or riveted to the body
	Less than the specified number of rivets securing the mouthpiece or base-rim to the body (when applicable)
	Any rivet not finishing with the head on the outside
	Any component part or operation omitted or not as specified (unless otherwise classified herein)
Label	Label missing, incomplete, illegible or incorrect
	Label not securely attached

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:02Z
Check the source to verify that this is the current version before use.

4.3.2.2 Dimensional examination.- The megaphones shall be examined for dimensional defects. Any dimension deviating from dimensions and tolerances specified shall be scored as a defect.

4.3.3 Inspection levels and acceptable quality levels.- The inspection levels and acceptable quality levels (AQL's), expressed in defects per one hundred units (DHU), shall be as follows:

	Inspection level	AQL's
For defects applicable to 4.3.2.1	II	6.5
For defects applicable to 4.3.2.2	S-3	4.0

4.3.4 Examination of preparation for delivery requirements.- An examination shall be made to determine that packaging, packing, and marking comply with Section 5 requirements of this specification. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be closed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per 100 units.

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence or method of application.
Materials	Any component missing, damaged, or not as specified.
Workmanship	Inadequate application of components such as incomplete closure of container flaps, loose strapping, inadequate stapling, improperly sealed polyethylene bag. Bulged or distorted container.
Content	Number per container not as specified.

4.4 Testing of the end item.- The finished megaphones shall be tested for the resistance to salt water requirement specified in 3.8. The sample unit shall be one megaphone. The lot size shall be expressed in units of megaphones. The sample size shall be as shown below. The lot shall be unacceptable if one or more units of product fail to meet the requirements specified when tested as specified in 4.4.1.

Lot size	Sample size
800 or less	2
801 to 22,000	3
22,001 and over	5

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:02Z
Check the source to verify that this is the current version before use.

4.4.1 Resistance to salt water.- For this examination, one determination per sample unit shall be made. Completely immerse a megaphone in a 10 percent by weight solution of Sodium Chloride for 24 (± 1/2) hours at room temperature. The megaphone shall be dried in the atmosphere for 60 (± 5) minutes. The megaphone shall be examined for evidence of separation or discoloration of the component parts or swelling, softening, tackiness or fiber loss of the body material. Results shall be reported as "pass" or "fail".

5. PREPARATION FOR DELIVERY

5.1 Packaging.- Packaging shall be level A or C (see 6.2).

5.1.1 Level A.- Each megaphone shall be completely wrapped with two sheets of kraft paper. Five 18 inch or three 32 inch megaphones shall be nested. The mouthpiece of each inner megaphone shall be completely covered with cellulosic wadding measuring 6 inches in length by 6 inches in width by 1/4 inch thick. The cellulosic wadding shall be secured with minimum 1 inch width gummed or pressure sensitive paper tape.

5.1.2 Level C (Commercial Packaging).- Megaphones shall be packaged to afford adequate protection against physical damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets this requirement. The package and the quantity per package shall be the same as that normally used by the supplier for retail distribution.

5.2 Packing.- Packing shall be level A, B, or C (see 6.2)

5.2.1 Level A.- Twenty 18 inch or twelve 32 inch megaphones, packaged as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC-L, grade V2s of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class weather-resistant, variety DW, grade V15c of PPP-B-636. Level A packages shall be packed upright, two in length, two in width and one in depth within the shipping container. The megaphones shall be immobilized within the container by a fiberboard pad with four die cut holes each approximately 4 inches in diameter. The fiberboard pad with the die cut holes shall be positioned down over the mouthpiece end of each megaphone package. The pad shall fit inside the length and width of the box liner. The fiberboard pad shall be fabricated from the same material as the box liner. Inside dimensions of the shipping container for the 18 inch megaphones shall approximate 19 inches in length, 19 inches in width and 38 inches in depth, and for the 32 inch megaphones shall approximate 30 inches in length, 30 inches in width and 38 inches in depth. The exact dimensions for the containers shall be determined by the supplier to insure that the contents fit properly into the shipping container. Each shipping container shall be closed in accordance with method III, waterproofed in accordance with method V, and reinforced as specified in the appendix of PPP-B-636.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:02Z
Check the source to verify that this is the current version before use.

5.2.2 Level B.- Twenty 18 inch or twelve 32 inch megaphones, packaged as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC-L, type CF (variety SW) or SF, class domestic, grade 275 of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class domestic, variety DW, grade 275 of PPP-B-636. Megaphones, packaged as specified in 5.1, shall be packed upright, two in length, two in width and one in depth within the shipping container. The megaphones shall be immobilized within the container by a fiberboard pad with four die cut holes each approximately 4 inches in diameter. The fiberboard pad with the die cut holes shall be positioned down over the mouthpiece end of each megaphone package. The pad shall fit inside the length and width of the box liner. The fiberboard pad shall be fabricated from the same material as the box liner. Inside dimensions of the shipping container for the 18 inch megaphones shall approximate 19 inches in length, 19 inches in width and 38 inches in depth, and for the 32 inch megaphones shall approximate 30 inches in length, 30 inches in width, and 38 inches in depth. The exact dimensions for the containers shall be determined by the supplier to insure that the contents fit properly into the shipping container. Each shipping container shall be closed in accordance with method II as specified in the appendix of PPP-B-636.

5.2.2.1 When specified (see 6.2), the shipping container shall be a grade V3c, V3s or V4s fiberboard shipping container fabricated in accordance with PPP-B-636 and closed in accordance with method III as specified in the box specification.

5.2.3 Level C (Commercial Packing).-Megaphones, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the supplier for retail distribution. Containers shall comply with the U.S. Postal Service Manual, Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

5.3 Marking.- In addition to any special marking required by the contract or order, unit packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:02Z
Check the source to verify that this is the current version before use.

6.1 Intended use.- The hand megaphones covered by this specification are intended for all purpose use by the Military Services.

6.2 Ordering data.- Procurement documents should specify the following:

a. Title, number and date of this specification
b. Sizes required (see 1.2)
c. First article sample requirements (see 3.2)
d. Selection of applicable levels of packaging and packing (see 5.1 and 5.2)
e. When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1)

6.3 Samples.- For access to samples, address the procuring office issuing the invitation for bids (see 3.1).

Custodian:
Army - GL
Navy - SA
Air Force - 82

Review activities:
Army - GL
Air Force - 82

Preparing Activity:
Navy - SA

Project No. 8465-0492

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:02Z
Check the source to verify that this is the current version before use.


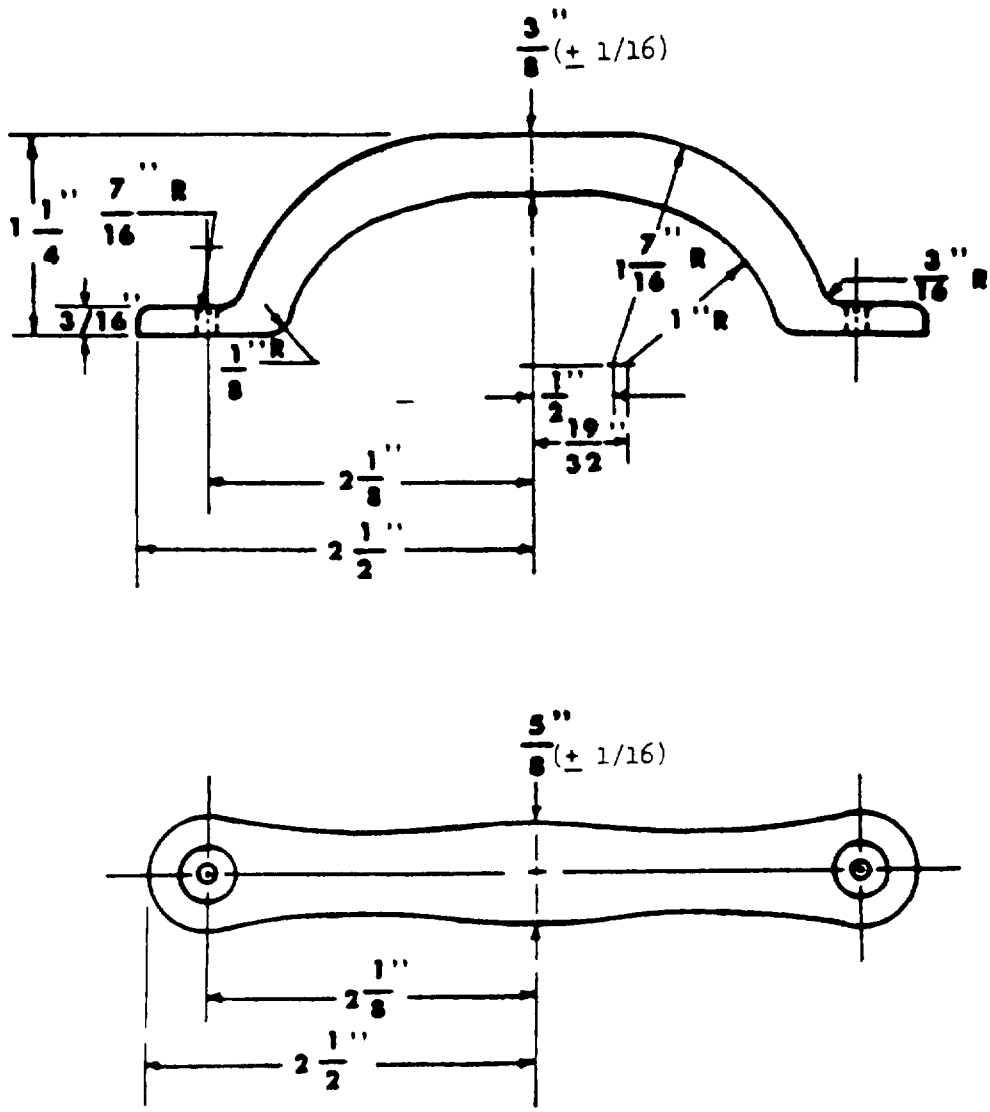


FIGURE 1—Handle

Tolerances

Whole and mixed numbers:	± 1/32 inch
Fractions:	± 1/64 inch

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:02Z
Check the source to verify that this is the current version before use.

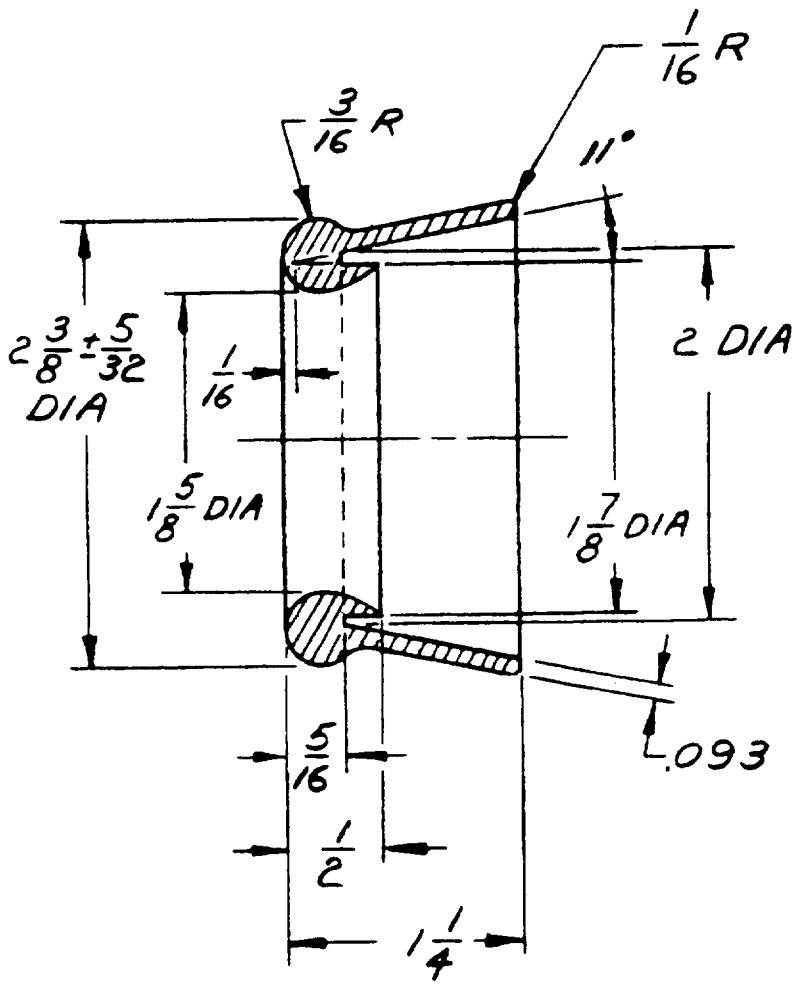


Tolerances:

Whole and mixed numbers:	± 1/32 inch
Fractions:	± 1/64 inch
Decimals:	± 0.005 inch

FIGURE 2 - MOUTHPIECE

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:02Z
Check the source to verify that this is the current version before use.

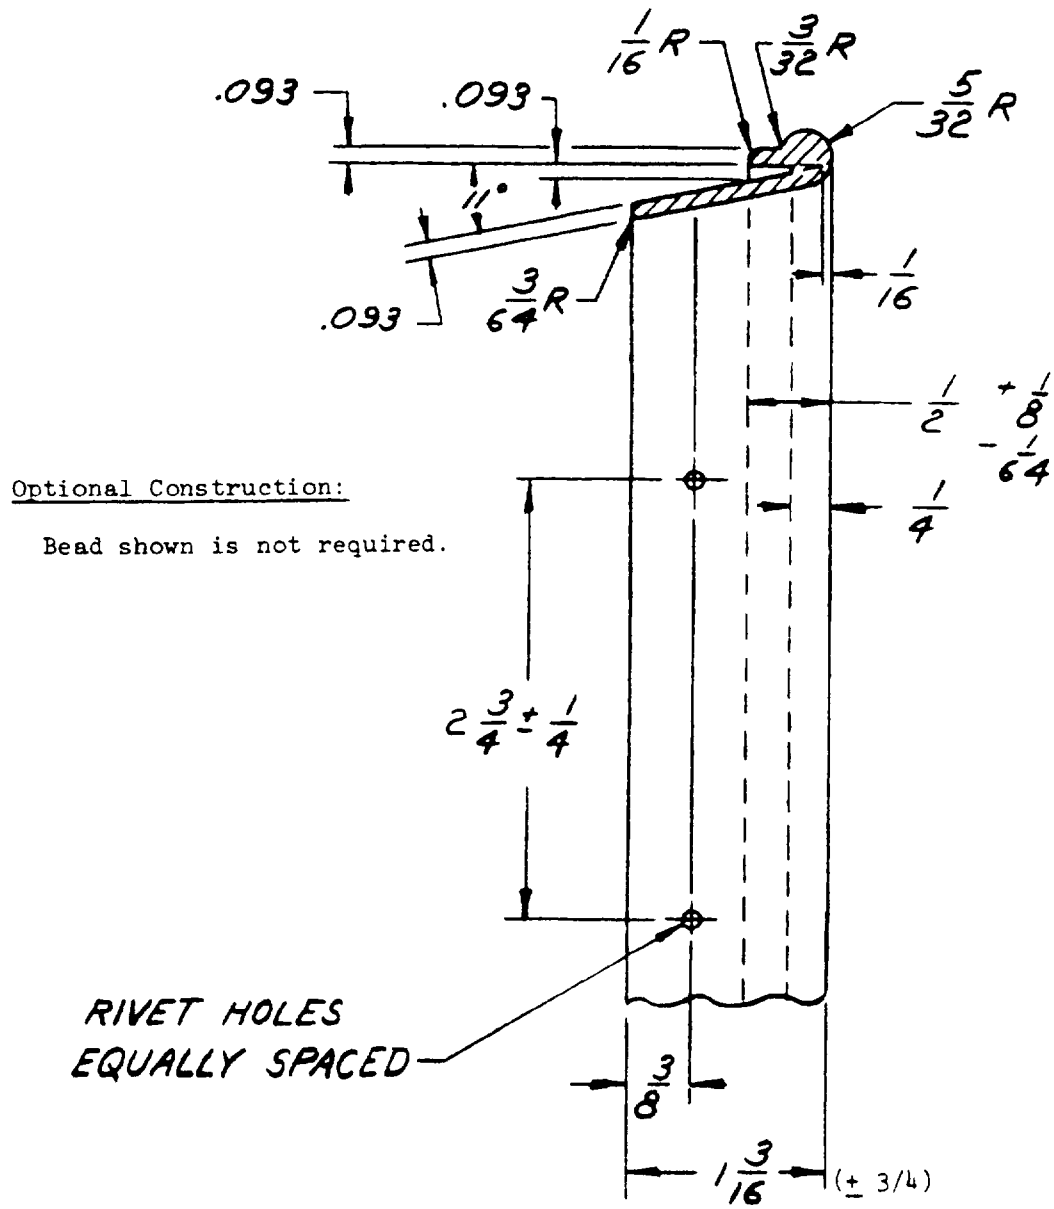

Optional Construction:


Bead shown is not required.

Tolerances:

Whole and mixed numbers:	± 1/32 inch
Fractions:	± 1/64 inch
Decimals:	± 0.005 inch


FIGURE 3 - BASE RIM

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:02Z
Check the source to verify that this is the current version before use.

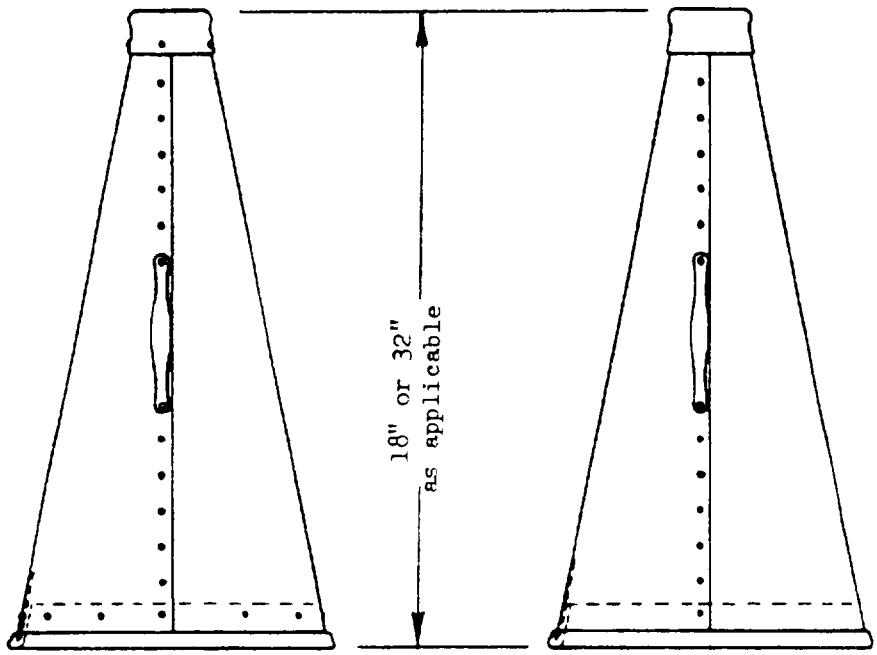

RIVETED MOUTHPIECE AND RIM CONSTRUCTION

BONDED MOUTHPIECE AND RIM CONSTRUCTION

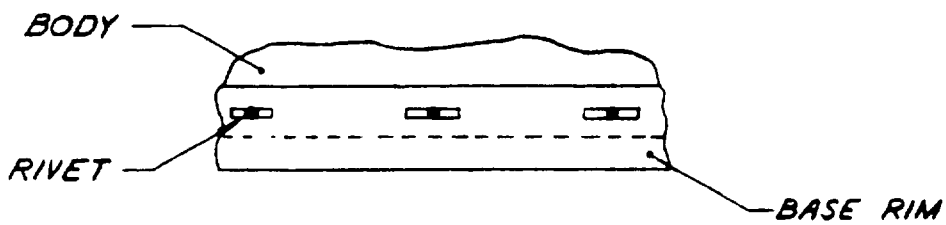

INSIDE VIEW OF RIVETED RIM

FIGURE 4 - MEGAPHONE, HAND

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:02Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

MIL-M-1263D Megaphone, Hand

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 68 WHICH MAY BE USED

S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:02Z
Check the source to verify that this is the current version before use.

FOLD

Officer in Charge,
Navy Clothing and Textile Research Unit
21 Strathmore Road
Natick, MA 01760

POSTAGE AND FEES PAID

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

OFFICER IN CHARGE
NAVY CLOTHING & TESTILE RESEARCH UNIT
21 STRATHMORE ROAD
NATICK, MA 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:02Z
Check the source to verify that this is the current version before use.