MIL-P-1215C
8 November 1977
SUPERSEDING
MIL-P-1215B
23 June 1970

MILITARY SPECIFICATION

PINCH-OFF TOOL, TUBING

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers one type of tubing pinch-off tool.

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATION

FEDERAL

PPP-P-40 - Packaging and Packing of Hand Tools.

STANDARD

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Natick Research and Development Command, Natick, MA 01760 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 5120

Source: https://assist.dla.mil -- Downloaded: 202610-16T12:54Z
Check the source to verify that this is the current version before use.

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Standard product. The pinch-off tools covered by this specification shall be the manufacturer's current, standard commercial product, except for any changes necessary to comply with specification requirements.

3.2 Materials (see 6.3). Materials not definitely specified shall be of the quality normally used by the contractor for pinch-off tools, provided the completed item complies with all provisions of this specification.

3.3 Construction. The pinch-off tool shall consist of two mating steel die blocks; two wing nut clamping screws, and shall be similar in design to figure 1. Sizes of tubes accommodated and the tool dimensions and tolerances shall conform to table I. The dimensional tolerance shall be + 1/16 inch (+ 1.6 mm). The pinch-off section shall make an air tight closure, under an air pressure of 25 psig (172 kPa), in copper, brass, aluminum and soft steel tubing listed in table I when tested as specified in 4.3.1. The pinched-off tubing shall then be rounded out in the sized die holes with no cuts on the tube.

TABLE I. Tube sizes and dimensions

Sizes of holes for tubing (O.D.)	Length	Width	Thickness	Pinch-off section Length
Inch 1/4, 3/8, 1/2	3-3/8	1-1/8	9/16	3/4
(mm) (6.4, 9.5, 13)	(86.0)	(29.0)	(14.0)	(19.0)

3.4 Finish. The tool shall be finished in accordance with the manufacturer's standard commercial practice.

3.5 Marking for identification. Each pinch-off tool shall bear the manufacturer's name or trademark and the tube sizes; cast integrally, stamped, or otherwise permanently marked upon the item of equipment (see figure 1).

3.6 Workmanship. Exterior surfaces shall be smooth, and free from burrs, sharp edges and corners, cracks, inclusions and porosity. The components shall not be bent, fractured, malformed or out of alignment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T12:54Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Quality conformance inspection. Sampling for inspection shall be performed in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated.

4.2.1 Component and material inspection. In accordance with 4.1, components and materials shall be tested and inspected in accordance with all the requirements of referenced specifications and standards, unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document.

4.2.2 End item inspection. The lot shall be expressed as all the tools offered for inspection at one time. The sample unit for this inspection shall be one completely finished pinch-off tool.

4.2.2.1 Visual examination. Examination of the pinch-off tools shall be in accordance with the classification of defects set forth in table II. The inspection level shall be level II with an acceptable quality level (AQL) of 4.0, expressed in terms of defects per hundred units.

TABLE II. Classification of defects

Examine	Defect
Finish	Not in accordance with the manufacturer's standard practice
Construction and workmanship	Not free from inclusions of porosity Component bent, fractured, malformed, out of alignment Any burr, sharp edge, crack or corner Component missing Tube hole missing
Marking	Missing, illegible, incorrect, or not permanent

Source: https://assist.dla.mil -- Downloaded: 202610-16T12:54Z
Check the source to verify that this is the current version before use.

4.2.2.2 Dimensional examination. Inspection of the end item shall be made for compliance with the dimensions specified herein. Any dimension not within specified requirements shall be classified a defect. The inspection level shall be S-3 with an AQL of 2.5, expressed in terms of defects per hundred units.

4.2.2.3 End item testing. The pinch-off tool shall be tested as specified in 4.3.1. The inspection level shall be S-1 with an AQL of 4.0 defects, expressed in terms of defects per hundred units.

4.2.3 Examination of preparation for delivery. Examination of preparation for delivery shall be made in accordance with PPP-P-40.

4.3 Test.

4.3.1 Leak test. A 6 foot (1.82 m) maximum length of soft steel tubing in each of the sizes listed in table I shall be attached by means of an adapter to a compressed air source with gauge. The tubes shall be pinched off at approximately 2 inches (50.8 mm) from the free end of the tubing and the air pressure of 25 psig (172 kPa) turned on. The pressure on the gauge shall not drop in a 5 minute period. The pinched area shall then be rounded to its original shape. Any evidence of a leak or failure to round the tube shall constitute failure of the test.

5. PACKAGING

5.1 Preservation-packaging, packing and marking. Preservation-packaging, packing and marking for level A, B, or C shall be in accordance with PPP-P-40 for tools, beading and flaring (see 6.2).

6. NOTES

6.1 Intended use. Tubing pinch-off tools are intended for making temporary, gas-tight closures on copper, brass, aluminum and soft steel tubing and for opening and rounding the tubing after the temporary closures.

6.2 Ordering data. Procurement documents shall specify the following:

(a) Title, number, and date of this specification.
(b) Levels of preservation-packaging and packing required (see 5.1).

6.3 Recycled material. It is encouraged that recycled material be used when practical as long as it meets the requirements of the specification (see 3.2).

Source: https://assist.dla.mil -- Downloaded: 202640-16T12:54Z
Check the source to verify that this is the currentversion before use.

6.4 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

Custodians:

Army - GL
Air Force - 99

User activities:

Army - AT, AV, AL
Navy - MC, YD

Preparing activity:

Army - GL

Project No. 5120-0726

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T12:54Z
Check the source to verify that this is the current version before use.

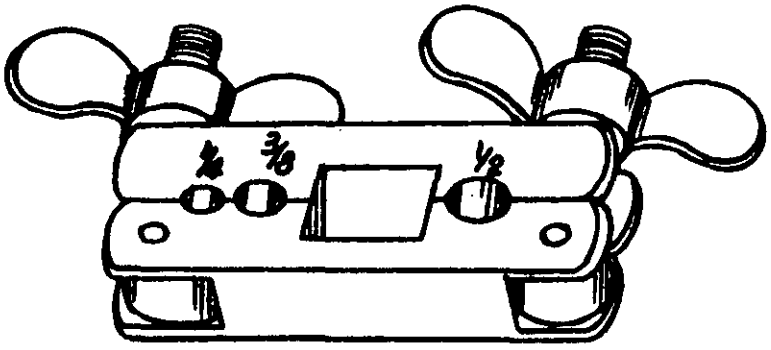


Figure 1. Pinch-Off Tool

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T12:54Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

[redacted] ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 4966 WASHINGTON D C

POSTAGE WILL BE PAID BY THE [redacted] ARMY

Commander
US Army Natick Research and Development Command
ATTN: DRXNM-TD[T]
Natick, MA 01760

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T12:54Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-P-1215 C	PIPE H - OFF TOOL, TUBING

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*:

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T12:54Z
Check the source to verify that this is the current version before use.