AA-S-00680E(GSA-FSS)
April 29, 1971
SUPERSEDING
Int. Fed. Spec. AA-S-00680d(GSA-FSS)
May 27, 1966

INTERIM FEDERAL SPECIFICATION

STANDS, OFFICE MACHINE

This Interim Federal Specification was developed by General Services Administration, Federal Supply Service, Washington, D. C. 20406, based upon currently available technical information. It is recommended that Federal agencies use it in procurement and forward recommendations for changes to the preparing activity at the address shown above.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers stationary and portable stands for typewriters and other office machines.

1.2 Classification.

1.2.1 Type and size. The office machine stands shall be of the following types and sizes as specified (see 6.2):

Type I – Stationary stand.

Size 1 – 36 inches wide, 24 inches deep, 26-1/2 inches high (with drawer).
Size 2 – 32 inches wide, 18 inches deep, 26-1/2 inches high (without drawer).

Type II – Portable stand (with casters and footlocking device)
20 inches wide, 18 inches deep, 26-1/2 inches high.

Type III – Adjustable platform stand
36 inches wide, 23 inches deep, 29-1/2 inches high.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issues in effect on the date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

Federal Specifications:

L-P-508	-	Plastic sheet, Laminated, Decorative and Nondecorative.
FF-C-82	-	Casters, Swivel, Chair.
QQ-Z-325	-	Zinc Coating, Electrodeposited, Requirements For.
TT-C-490	-	Cleaning Methods and Pretreatment of Ferrous Surfaces for Organic Coatings.
TT-C-1162	-	Coating, Polyurethane Alkyd-Modified, Satin-Finish (For Interior and Exterior Use).
TT-E-508	-	Enamel; Interior, Semigloss, Tints and White.
TT-E-543	-	Enamel-Undercoat, Interior, Tints and White.
TT-L-57	-	Lacquer, Rubbing, Clear (for Wood Furniture).
TT-L-58	-	Lacquer, Spraying, Clear and Pigmented (General Use).
UU-P-268	-	Paper, Kraft, Untreated, Wrapping.
PPP-B-585	-	Boxes, Wood, Wirebound.
PPP-B-636	-	Box, Fiberboard.
PPP-C-843	-	Cushioning Material, Cellulosic.
PPP-F-320	-	Fiberboard, Corrugated and Solid, Sheet Stock, (Container Grade) and Cut Shapes.
PPP-P-291	-	Paperboard, Wrapping, Cushioning.
PPP-T-45	-	Tape, Gummed Paper, Reinforced and Plain for Sealing and Securing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

Federal Standards:

Fed. Std. No. 123 - Marking for Domestic Shipment (Civil Agencies).
Fed. Std. No. 187 - Identification of Pressed Bends, Forms, Seams, and Joints (Sheet Metal).
Fed. Std. No. 595 - Colors.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the superintendent of Documents, U. S. Government Printing Office, Washington, D. C. 20402.

(Single copies of this specification and other Federal specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D. C., Atlanta, Chicago, Kansas City, Mo., Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, Washington.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Specifications:

MIL-L-10547 - Liners, Case, Waterproof.
MIL-W-12332 - Welding, Resistance, Spot, Seam and Projection, for Fabricating Assemblies of Low Carbon Steel.

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.
MIL-STD-130 - Identification Marking of U. S. Military Property.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply.

Steel Products Manual, Carbon Steel Sheets

(Application for copies should be addressed to American Iron and Steel Institute, 150 East 42nd Street, New York, New York 10017).

Department of Commerce Publication:

Commercial Standard CS 35 Hardwood Plywood.

(Application for copies, accompanied by money order, coupon or cash should be addressed to the Superintendent of Documents, Government Printing Office, Washington, D. C. 20402. Prices may be obtained from the Superintendent of Documents).

National Motor Freight Traffic Associtation, Incorporated, Agent:

National Motor Freight Classification.

(Application for copies shall be addressed to the National Motor Freight Traffic Association, Inc., Agent, 1616 P Street, N.W., Washington, D. C. 20036).

Uniform Classification Committee, Agent:

Uniform Freight Classification.

(Application for copies should be addressed to the Uniform Classification Committee, Tariff Publishing Officer, Room 202 Union Station, 516 W. Jackson Blvd., Chicago, Illinois 60606).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Preproduction sample. Unless otherwise specified (see 6.2), before production is commenced, a sample of the finished commodity and each component part shall be submitted or made ready for the contracting officer or his authorized representatives to examine and test to determine compliance with this specification. Approval of the preproduction sample authorizes the commencement of production, but does not relieve the contractor of responsibility from compliance with all other applicable provisions of this specification. Production units shall not vary from the approved preproduction sample in design or construction without written approval of the contracting officer.

3.2 Material. All materials used shall be as hereinafter specified. All materials shall be unused, and be free from defects which affect the serviceability or appearance of the product.

3.2.1 Steel. The steel sheets used for all exposed parts and top shall be commercial quality, cold rolled or cold rolled oiled, either of which shall have a stretcher leveled standard of flatness. Steel sheets used for other parts shall be cold rolled or cold rolled oiled as specified above, hot rolled pickled and oiled, or hot rolled annealed. "Commercial quality" and "stretcher leveled standard of flatness" shall be as defined in the Steel Products Manual. The steel tubing shall be FS 1010-1020, either seamless or continuously seam welded. The thickness of steel to be used for individual parts shall be as given in the applicable tables and paragraphs of this specification and are the minimum thicknesses permitted, except the decimal equivalent shown for gages are subject to the tolerances given in the Steel Products Manual. The steel shall be smooth, free of rust loose scale, pits, scratches, laps, crimps or buckles. The sheet steel used for parts to be formed shall withstand the bend test specified in 4.5.2.

3.2.2 Top cover material.

3.2.2.1 Plastic sheet. When plastic surfaced tops are required, the plastic sheet shall conform to the requirements of L-P-508, Style D, Type I, Grade HP, Class 1. The plastic sheet shall be 0.062 inch, plus or minus 0.005 inch thick. The plastic sheet colors and, when applicable, the plastic sheet surface finish shall be as specified in 3.4.

3.2.3 Plywood. Plywood tops for type II stand shall be not less than 5/8 inch thick, constructed in accordance with Commercial Standard CS 35, latest edition, for hardwood plywood and shall be type II bond, Grade 1 face veneer of beech, cherry, birch or maple and not less than Grade 2 back veneer. The veneers shall be not less than 1/28 inch thick. The cross bands shall be not less than Grade 2 and not less than 1/20 inch thick. When veneer core construction is furnished, no ply shall exceed 1/8 inch in thickness. Lumber core shall be of sound grade (2) and constructed of strips not exceeding 4 inches in width.

3.2.4 Hardware.

3.2.4.1 Casters. The casters and caster sockets for Type II stands shall conform to the requirements of the ball bearing swivel, double or two level raceway, and soft rubber tread wheel composition of FF-C-82. The wheel diameter shall be 2-1/2 inches. Standard commercial tolerances will be permitted.

3.2.4.2 Fastening devices. Bolts, nuts, and screws shall be made rust-resistant by means of zinc or cadmium commercial plating. Other fastening devices shall be made rust-resistant by manufacturers commercial methods.

3.2.4.3 Exterior hardware. Drawer pulls, footsockets and binding strips shall be one of the following: Satin finished anodized aluminum, type 302 corrosion resistant steel, or satin chromium plating on steel, die cast zinc, brass or bronze. Tensile strength of die cast zinc shall be not less than 40,000 p.s.i. The exposed surfaces of all outside hardware used on a single unit shall be finished to match each other within the limits of the base material and protective plating used.

3.2.4.3.1 Footsockets. Annodized aluminum footsockets shall be not less than 0.039 inch thick. Minimum thickness of steel footsockets shall be 22 gage (0.0299 inch). All footsockets shall be at least 1-1/2 inches high and shall be rounded to correspond to the shape of the leg. The footsockets shall be flush with, or shall slightly inset, the outside surfaces of the leg. They shall be secured by recessed fastenings, which shall be designed to protect floors. There shall be no fastenings on the surfaces of the footsockets that are adjacent to the two outside surfaces of the legs. The footsockets shall be easily removable with the use of simple tools.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

3.2.4.3.2 Binding strips. The binding strip shall have a 3/16 inch, minimum, quarter-round bead, or a rounded bead not less than 11/64 inch high by 7/64 inch wide. The inside surface of the bead shall be shaped to conform to the beveled edge of the top material and shall hold the edge of the top material firmly against the top plate. The inserting web shall be serrated, embossed or grooved so that it will securely set in its designated position, yet it shall be removable to permit replacement. Serrations shall be not more than one inch apart, or the strip shall be embossed or grooved full length.

3.2.4.3.3 Drawer pulls. The size of the drawer pull handhole, when pull is mounted on drawer, shall be 2-1/4 inches by 5/8 inch, minimum. No part of pull attachment shall project beyond the inside drawer front nor shall attachments be visible when drawer is closed. All surfaces and edges shall be smooth and shall be free from roughness and sharp edges.

3.2.5 Finishing materials.

3.2.5.1 Primer. The primer, when used, shall be compatible with the finishing enamel used.

3.2.5.2 Enamel for wood parts. When enamel is used on wood tops and leaves, the enamel undercoat shall conform to the requirements of TT-E-543 and the enamel for the finish coat shall conform to the requirements of TT-E-508 except the color shall be as specified in 3.4.

3.2.5.3 Enamel for metal parts. Enamel for metal parts shall be the manufacturer's commercial product except the color shall be as specified in 3.4.

3.2.5.4 Clear lacquer. Lacquer for clear finish of wood tops and leaves shall conform to the requirements of TT-L-57.

3.2.5.5 Pigmented lacquer. When pigmented lacquer is used on wood tops and leaves, it shall conform to type II of TT-L-58, except the color shall be as specified in 3.4.

3.2.5.6 Clear varnish. Clear varnish, when used on wood tops and leaves shall conform to the requirements of TT-C-1162.

3.3 Design and construction.

3.3.1 Appearance. The general appearance of the stands shall be as shown in Figure 1, which illustrates a typical design of each type covered by this specification.

3.3.2 Sheet metal formations. Sheet metal formations specified herein shall conform to the illustrated nomenclature in Fed. Std. No. 187. The bends and folds in the formations specified are the minimum number of bends and folds permitted. Additional bends and folds are acceptable.

3.3.3 Spot welds. Spot welds shall not be closer to the edges of either adjoining member than one-half the greatest dimension of the spot weld, nor shall they be centered closer together than twice the greatest dimension. Squeeze time, weld time and hold time shall be controlled to produce uniform welds that will meet the test specified in 4.5.4. All depressed or protruding spot welds on exposed surfaces of stands shall be filled and sanded or ground smooth. Except as specified herein, spot welds shall be centered not more than three inches apart.

3.3.4 Tolerances. Unless otherwise specified for the individual component, the tolerances shall be as specified in Table 1. Industry recognized ordering limits are applicable to material, (i.e. steel and plywood), procured by standard or nominal sizes and thickness.

TABLE I. Tolerances

Dimension	Plus (inch)	Minus (inch)
Fraction of 1 inch	1/16	1/32
1 inch to 3 inches	1/8	1/16
Over 3 inches	1/4	1/8
Width and depth of assembled end items	1/4	1/4
Height of assembled end items.	1/2	1/2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

3.3.5 Type I stands. The type I, size 1 stands shall be equipped with one drawer. Size 2 stands are furnished without drawers. The stands shall be constructed to form a rigid well braced unit, the parts of which will not work loose under normal service conditions of constant use with a typewriter or other office machine. The stand shall withstand the tests specified in 4.5.1.1 and 4.5.1.2.

3.3.5.1 Assembly. The type I stand shall be furnished ready for complete and proper assembly (shipped knocked-down). Assembly shall be by means of nuts, bolts, and lockwashers or by self tapping screws and lockwashers. One set of legible, concise assembly instructions, (complete in both word and illustration), shall be packed with each unit.

3.3.5.2 Tops. The top plate shall be not less than 18 gage (0.0478 inch) steel with a stretcher leveled standard of flatness and shall be rigidly reinforced to withstand the test specified in 4.5.1.2. Top reinforcement welds shall be centered not less than 4 inches apart. The top plate shall be covered with a plastic sheet meeting the requirements of 3.2.2.1. The top material shall be cemented uniformly and permanently to the top plate by a cement recommended by the adhesive manufacturer or the top material manufacturer. The plastic laminate shall be applied at a controlled temperature and with sufficient roller pressure to insure a permanent bond between the plastic and the entire top plate surface. A back-up under the top is required as a part of the rolling process. The steel top plate shall support the entire undersurface of the desk top covering material and shall be properly cleaned prior to the application of the adhesive. The edge molding shall be not less in thickness than the thickness of the top plate and may be composed of more than one piece. It shall be a channel form and flange formation with the channel formation along the bottom being not less than 1/2 inch wide. Alternatively, the bottom return flange may be omitted provided the bottom flange of the molding extends to the apron. The edge molding shall provide for a binding strip as specified in 3.2.4.3.2 which shall be securely held in place but which must be easily removable. The top of the binding strip shall not project above the surface of the top covering at any point along the perimeter of the top and it shall lap at least 0.031 inch of the top covering. The binding strip shall be either vertically flush with the outside edge mold or may extend outside the edge mold by not more than 1/16 inch. The exposed edge molding and the binding strip shall be of not more than two pieces each, and shall be butt joined on either or both ends of the top. The joining shall result in smooth seams with no gaps between the joined pieces. All corners of the top shall be rounded on not less than 3/4 inch radius. The overhang of the top beyond the apron shall be approximately equal on all sides and ends and shall not exceed 1-1/2 inches.

3.3.5.3 Aprons. The aprons shall be of not less than 18 gage (0.0478 inch) steel, and shall be shaped for attaching to the top and legs. They shall extend a minimum of 4-1/2 inches below the lower edge of the edge molding of the size 1 stand. The apron of the size 2 stand shall extend a minimum of 3-1/2 inches below the lower edge of the edge molding. Back and end aprons may serve as part of the drawer housing. Except as otherwise permitted herein, the bottom of the aprons shall have either a minimum 1/2 inch wide channel or a minimum 1/2 inch flange plus flatfold or teardrop fold formation. When aprons are part of the drawer housing their bottoms that are around the housing may have a 1/2 inch wide flange only. The front of the size 1 stands shall have a triangular gusset at the left front to brace and secure the left front leg. The size 2 stands shall have gussets at each front corner. The right angle sides of the gusset shall be flanged for securing th the top and leg and the sloping edge shall be formed in a manner which will eliminate a sharp edge. Aprons shall be secured to the top plate or edge molding by extrudes; spot welding; with screws, nuts and lockwashers; or sheet metal screws. Flanges of the aprons shall be punched for attachment to the legs, or a leg housing may be clamped or welded to the apron at each corner. Leg housing shall be not less than 11 gage (0.1196 inch) and shall be the full height of the aprons.

3.3.5.4 Legs. The legs shall be of not less than 18 gage (0.0478 inch) steel and shall be 2 inches (plus or minus 1/8 inch) square. The legs shall be seamless or continuously welded tubing, or they may be formed from one piece of steel with the seam on the inside corner and the joint completely closed full length. Any outside non-formed edge along this seam shall be not more than 1/8 inch and not less than 1/16 inch from the corner of the leg and shall be free of burrs and sharpness. When spotwelding is the means of closure along this seam, the welds shall not depress the surface of the leg more than 1/32 inch. Each leg shall have tapped extrusions to permit its attachment to the aprons by not less than four 1/4 inch self tapping or machine screws. In lieu of an extrusion, each leg may be provided with an 11 gage (0.1196 inch) steel clamping plate welded inside its top, with the plate the full height of the aprons. Means shall be provided for securing the leg through the clamping plate to the apron corner brace by a bolt not less than 3/8 inch in diameter. The legs shall be easily removable but must be rigid when secured in place. The leg assembly shall be provided with a solid nut and lockwasher or lock-nut to insure rigidity under continued use. Each leg shall be fitted with a footsocket as specified in 3.2.4.3.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

3.3.5.5 Drawer housing. Drawer housing shall be rigidly constructed of not less than 22 gage (0.0299 inch) steel. The assembly shall enclose the drawer except at the top. The front section shall be channel shaped and may be formed from the sides and bottom or independently formed and secured to the sides and bottom sections by spot welding. When the front section is independently formed and secured to the sides and bottom, the resultant seam at the left side and at the bottom shall be free of burrs and sharpness. Unless the front section is of single piece construction and is of at least 16 gage (0.0598 inch) steel, its lower corner shall be reinforced by not less than 16 gage (0.0598 inch) steel angles, which shall be spotwelded inside the channel. The lower left horizontal edge which extends from front to back shall be formed to a minimum 3/8 inch radius. The lower left front corner shall be formed to correspond to the radius of the lower left horizontal edge. The shape of the corner, the method of its formation and the quality of workmanship shall preclude injury to the user's leg or damage to his clothing. Provisions shall be made for securing the components to the aprons by spot welding and to the tops as specified in 3.3.5.3 (for securing aprons). Alternatively, the housing may be secured to the top and legs as specified in 3.3.5.3 (for securing aprons). The housing shall be secured in place prior to shipment. Each suspension shall be equipped with nylon glides to prevent metal-to-metal contact with the drawer suspension slide and shall be secured by welds, rivets, clips, sheet metal screws or a combination thereof. Suspensions shall be reinforced as required to support the fully loaded and completely extended drawer in a horizontal position.

3.3.5.6 Drawers. The type I, size 1 stand shall have a drawer located on the right hand side of the stand which shall accommodate the trays specified in 3.3.5.7. The inside depth shall be not less than 19-3/4 inches. The height shall be the maximum permitted by the apron construction. The drawer front shall be not less than 22 gage (0.0299 inch) steel and the drawer body, back and front interliner shall be not less than 24 gage (0.0239 inch) steel. The drawer suspension slides shall be equipped with nylon glides to prevent metal-to-metal contact with suspension channel in housing. A safety stop shall be provided which will prevent the fully extended drawer from unintentional removal, but which will permit easy intentional removal. Each drawer shall be equipped with a drawer pull as specified in 3.2.4.3.3.

3.3.5.7 Stationery trays. The drawer of the type I, size 1 stand shall be equipped with four sloping stationery trays of not less than 24 gage (0.0239 inch) steel. The sides and bottom shall be channel formed. Each tray shall accommodate a minimum 5/8 inch high stack of 8-1/2 by 11 inch paper. The trays shall be removable from the drawer without the use of tools. The top of the initial assembled tray shall be at least 1/2 inch from the front drawer liner to facilitate removal of paper. The tops of all assembled trays shall be on the same plane and sufficiently below the top edges of the drawer to permit clearance of paper when the tray is filled to capacity and the drawer is opened. There shall be no shifting movement of trays inside the drawer when it is opened or closed in a normal manner or when papers are removed. Alternatively, the tray may be a single unit with four compartments that will accommodate the same amount of 8-1/2 by 11 inch paper as the four single trays. The unit shall fit inside the drawer. The trays and tray supports shall have no exposed sharp edges or pointed corners.

3.3.6 Type II stands. The type II stands shall be portable. Steel shall be as specified in 3.2.1 and dimensions of steel parts shall be not less than those specified in Table II. The stands shall withstand the tests specified in 4.5.1.1 and 4.5.1.2.

TABLE II. Dimensions of steel parts of type II stands

Shape	Size	Thickness
Seamless of welded tubes	1 inch diameter	18 gage (0.0478 inch)
Structural angles	1 inch by 1 inch	1/8 inch
Channels - 1-3/4 inch strips before forming	----------	16 gage (0.0598 inch)
Top angles over tubular legs	1 inch by 1 inch	16 gage (0.0598 inch)
Flat steel over tubular legs	1 inch wide	1/8 inch

3.3.6.1 Assembly. Unless otherwise specified, type II stands shall be furnished ready for complete and proper assembly (shipped knocked-down). Parts of knocked-down stands shall be assembled into sections by welding or rivets, with final joining of parts and sections by screws; by bolts, nuts and lockwashers; or by pin joints. One set of legible, concise, assembly instructions, (complete in both word and illustration), shall be packed with each knocked-down unit. When specified (see 6.2) stands shall be completely and properly assembled by the contractor before shipment (shipped set-up). Stands shipped set-up shall be assembled by means of welding or riveting except as specified in 3.3.6.2 and 3.3.6.3.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:41Z
Check the source to verify that this is the current version before use.

3.3.6.2 Base. The base shall be constructed of steel of the quality specified in 3.2.1 and of the dimensions listed in Table II. Legs shall be of steel tubing, and reinforcing members may be of that construction. Horizontal stretchers at the top and near the bottom shall be provided. There shall be at least three horizontal stretchers which shall lend support to the top specified in 3.3.6.3. Two of these stretchers shall extend between, and be integral with or secured to, the front and rear legs. The stretchers near the bottom shall be on each side and at the back of the base unit. The casters shall be mounted securely on the legs or on the bottom stretchers. Other reinforcements and braces, which may be secured to stands shipped set-up by the same means as specified for stands shipped knocked down, shall be added to assure that the unit will provide a firm, vibration-free surface for 13 inch carriage commercial electric typewriters or other office machines of equivalent weight. The base, when in its elevated position, shall be capable of supporting these machines. The elevating device shall be positive locking and shall be under the control of the operator at all times. The base shall become rigid when in its operating position and at rest on rubber cushioned glides. Stretchers, other reinforcements, and the elevating mechanism shall be designed and placed so that they will not interfere with the user. The clear depth and the clear width between the legs at the floor line shall be at least 20 inches and 17-1/2 inches respectively. Double or two level raceway casters as specified in 3.2.1.1 shall be provided. The clear depth between caster stems shall be at least 16-1/2 inches. Solid nuts and lockwashers or locknuts shall be provided when casters with threaded stems are used. When stands are in their elevated position, caster stems shall not be off the perpendicular as determined visually. Base components shall be accurately formed and assembled and shall be without sharp or harzardous edges. Protrusions or exposed nuts shall be capped over. Rivets and rivet heads shall be drawn up tight, and exposed welds ground smooth to protect the user's clothing and shoes from damage. Ends of legs shall be formed to receive the rubber cushioned glides.

3.3.6.3 Top. The top shall be 20 inches wide by 18 inches deep and shall be constructed of five ply lumber core or minimum seven ply veneer core conforming to 3.2.3. It shall be secured to the base by not less than six properly positioned number 8 sheet metal screws. Edges and corners shall be rounded to minimize damage to the plywood tops and possible injury to the user. Exposed edges shall be clear and of sound wood. When specified (see 6.2) the top shall be surfaced with a plastic sheet conforming to 3.2.2.2. The core construction shall be of the plywood specified herein except, if lumber core is used, the face and back veneers may be omitted. The minimum 5/8-inch thick plywood construction shall be maintained, however. A plastic backing sheet 0.030 inch thick (commercial tolerances permitted) shall be bonded to the underside of the plastic surfaced top. When specified (see 6.2) adjustable channels and cups capable of supporting a typewriter or other office machine shall be supplied in lieu of tops.

3.3.6.4 Leaves. Leaves shall be furnished for both sides, or a leaf for either the right or left side of the stands as specified (see 6.2). The leaf shall be not less than 12 inches wide by not less than 18 inches deep and of the same general construction as the tops specified in 3.3.6.3. The leaf shall be securely hinged to the frame or top of the stands and shall have a bracket support which will transfer any stress applied to the leaf directly to the base legs and not depend on the top for support. The hinges shall be steel, each hinge being secured to the leaf by not less than three sheet metal screws or rivets. The leaf support brackets shall be designed to support the leaf rigidly and positively at the level of the top when raised to the horizontal position. Stands having open tops shall have leaves of not less than 18 gage (0.0478 inch) steel formed for strength with all edges formed channel shape, and corners brazed and ground smooth.

3.3.7 Type III stands. The adjustable platform stand shall be 23 inches (plus or minus 1/2 inch) high. The base shall be constructed of steel and may have a steel, wood or, when specified, a laminated plastic covered top, and shall have one drawer and an adjustable platform for the typewriter. The type III stand shall withstand all of the performance tests specified in 4.5.1.

3.3.7.1 Assembly. Type III stands shall be completely and properly assembled by the contractor before shipment (shipped set-up). Assembly shall be by means of riveting or welding except for the wood top which shall be secured as specified in 3.3.7.3.

3.3.7.2 Base. The base shall be constructed of either steel tubing or die formed steel parts of the minimum thicknesses and dimensions specified in Table III. The components shall consist of legs, stretchers, braces, drawers and drawer suspensions and shall be assembled by welding or bolting into a sturdy item of office equipment that will withstand heavy daily use. The legs shall be equipped with rubber cushioned glides. One of the glides may be adjustable.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:41Z
Check the source to verify that this is the current version before use.

TABLE III. Dimensions of steel parts of type III stands

Component	Tubes	Die formed steel	Thickness
Legs	1" diameter	Angles 3" at top, tapering to 1-1/2" at the bottom, edges flanged 3/8"	16 gage (0.0598 inch)
Brace or shelf	1" diameter	Panshaped, 6" wide by 3/4" high	16 gage (0.0598 inch)
Stretchers	1" diameter	Channel 1-1/2" by 5/8"	16 gage (0.0598 inch)
Drawer suspension			16 gage (0.0598 inch)

3.3.7.3 Top. Top shall be of not less than 18 gage (0.0478 inch) steel or of wood. The steel top shall be formed and reinforced into a rigid unit without sharp or hazardous edges or corners and shall be secured to the base by bolts or welding. The wood top shall be as specified in 3.3.6.3, except it shall be secured to the base by not less than nine number 8 sheet metal screws which shall penetrate not less than 2/3 of its thickness. The screw heads shall be countersunk in the underside of the attaching member of the base. When specified (see 6.2) the wood top shall be plastic surfaced in conformance with 3.3.6.3.

3.3.7.4 Adjustable typewriter platform. The adjustable typewriter platform shall be 15-1/2 inches wide by 15 inches deep and shall have height adjustment of 3-1/2 inches. The adjustment mechanism shall withstand the test specified in 4.5.1.3 and shall operate accurately and efficiently by one simple operation resulting in a solid non-vibrating support for the typewriter. The top of the platform shall be finished the same as the balance of the top or may have a rubber mat secured to the platform by an adhesive as recommended by the manufacturer of the rubber mat.

3.3.7.5 Drawer. The stand shall be equipped with a drawer as specified in 3.3.5.6 and trays as specified in 3.3.5.7.

3.4 Colors. (see 6.3)

3.4.1 Metal finish. The color of the metal finish shall be gray, color chip No. 26134 of Federal Standard No. 595. Alternatively, caster support brackets and elevator links of type II stands may be dull or satin zinc plated. Plating shall conform to type I, any class, of QQ-Z-325.

3.4.2 Wood finish. When pigmented finish is specified for wood tops and leaves, the color shall be gray, color chip No. 26134 of Federal Standard No. 595.

3.4.3 Plastic sheet color, type I stands. The plastic sheet color of type I stands shall be white and shall match the standard white plastic sheet color, pattern and finish as adopted by the Federal Supply Service, General Services Administration, (See 6.3.1).

3.4.4 Plastic sheet color and finish, type II and III. The plastic sheet color of tops and leaves of type II and III stands shall be a simulated natural maple grain and color. Finish shall be "Finish A" in accordance with L-P-508.

3.5 Pretreatment and finishing.

3.5.1 Metal parts.

3.5.1.1 Pretreatment. All exterior and interior unplated ferrous metal surfaces shall be treated for painting in accordance with any method of TT-C-490.

3.5.1.2 Priming. Unless type I or type II of TT-C-490 is used, all exterior and interior surfaces, (except top surface of top plate of type I stand), treated as specified in 3.5.1.1 shall be coated with primer as specified in 3.2.5.1.

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:41Z
Check the source to verify that this is the currentversion before use.

3.5.1.3 Enameling. All primed surfaces shall be coated with the enamel specified in 3.2.5.3 and baked in accordance with the enamel supplier's directions. Total dry film thickness of enamel and primer shall be not less than 1.4 mils on drawer fronts, outside edges of top and outside surfaces of legs, drawer housing, aprons and corner brackets; and not less than 0.9 mil on other surfaces, inside and outside the stands. If type I or type II of TT-C-490 is used in pretreatment coating, primer may be omitted and the minimum dry enamel film thicknesses may be 1.0 mil in lieu the 1.4 mils specified herein and 0.6 mil in lieu of the 0.9 mil specified herein. The finish shall level out to provide smooth, uniform, exposed surfaces without runs, wrinkles, grit, areas of thin film or no film and separation of color. Finish panels shall withstand the test specified in 4.5.3.

3.5.2 Wood tops and leaves.

3.5.2.1 Preparation for finishing. Prior to finishing, the wood tops and leaves shall be sanded smooth and all corners and edges eased.

3.5.2.2 Clear finish. The tops, leaves and edges shall receive sufficient coats of sealer and the semi-gloss lacquer specified in 3.2.5.4 or clear varnish specified in 3.2.5.6 to produce a smooth, heavy, even film of finish without runs, sags, areas of thin film or no film. The underside of tops shall receive at least two coats of sealer to retard moisture absorption. The finishing materials shall not cloud the natural grain or color of the wood.

3.5.2.3 Pigmented finish. When specified (see 6.2) wood tops and leaves of type II and type III stands shall have a gray pigmented lacquer or enamel finish. If lacquer is used, it shall be as specified in 3.2.5.5; two coats being applied after tops and leaves have been sealed as specified in 3.5.2.2. The enamel finish shall consist of an enamel undercoat and a finish coat as specified in 3.2.5.2.

3.6 Identification marking. Unless otherwise specified, each item shall be permanently and legibly marked in an inconspicuous place with the specification number, Federal Stock Number, contract number, month and year of manufacture and the manufacturer's name or trade mark, so that the source of supply can be readily determined. When specified (see 6.2) identification marking shall be in accordance with MIL-STD-130.

3.7 Workmanship. The craftmanship exercised shall insure well designed, well balanced, substantial and easy operating items of office equipment without sharp or hazardous features, surfaces, or components that will work loose during use. These units shall be satisfactory in function, serviceability and appearance. The forming of component parts, welding, reinforcing, bracing, finishing, curves of bent tubing, accuracy of knockdown and interchangeable features and moving parts shall be executed so that the finished item will satisfy the acceptable quality level, (AQL), established by this specification.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Preproduction sample inspection. Examination and testing of the preproduction samples (when required), shall be made on completely fabricated items, (before regular production is started), for all provisions of this specification applicable to end product examination and tests.

4.3 Sampling for inspection and acceptance. Sampling for inspection and acceptance shall be performed in accordance with MIL-STD-105, except where otherwise specified herein.

4.3.1 Component and material inspection. In accordance with 4.1 above, the supplier is responsible for insuring that components and materials used are manufactured, tested and inspected in accordance with the specified requirements of referenced subsidiary specifications and standards or, if none, in accordance with this specification.

4.3.2 End item inspection. The lot shall be all stands of the same type and size offered for inspection at one time. The lot size shall be expressed in units of stands for the purpose of determining the sample size in accordance with MIL-STD-105. The sample unit for this examination shall be one completely assembled stand or one stand ready for assembly as applicable.

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:41Z
Check the source to verify that this is the currentversjon before use.

4.3.2.1 Visual examination, assembled stands. The assembled stands shall be examined for the defects listed in Table IV. The inspection level and acceptable quality level shall be as specified in 4.4.

TABLE IV. Classification of end item defects

Examine	Defects	Classification Major	Classification Minor
Varnish, enamel or lacquer finish	Poor adhesion, i.e. blistered, checked, peeling; not dry to touch, not smooth and uniform, runs, sags, foreign matter in coating, area of thin coating or abrasion.		X
	Thickness not as specified		X
	Wrong color, color separation, color not uniform, stain, overspray or other discoloration.		X
	Scratch through to base material, bare spots.	X	
Metallic Coatings	Wrong kind.		X
	Ommitted, peeled, blistered, flaky or other poor adhesion.	X	
	Stained, tarnished or discolored.		X
Workmanship and construction (general)	Any part missing except fastening devices.	X	
	Malformed or mislocated parts affecting serviceability; broken, punctured or cracked parts; sharp edge or projection that may cause injury.	X	
	Malformed, mislocated, damaged, buckled or warped parts affecting appearance. Any dent on exposed surfaces affecting appearance.		X
	Components not of gage specified.	X	
Sheet metal formation	No formation when one is specified.	X	
	Not formation specified		X
Fastening devices	Threads stripped on more than one bolt; more than one bolt, nut, screw, lockwasher or similar fastening device missing.	X	
	Threads stripped one bolt; one bolt, nut, screw, lockwasher or similar fastening device missing.		X
Welds	Missing, not required number or not sound (broken, cracked, burnt through, poor adhesion).	X	
	Not ground smooth, protrude, or pits not filled (exposed welds).		X
	Spot welds not spaced as specified.		X
Foot sockets	Wrong kind		X
	Do not conform to shape of legs.		X
	Project beyond surface of legs.		X
	Not secured by easily removable, recessed fastenings.		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

TABLE IV. Classification of end item defects (con.)

Examine	Defects	Classification Major	Classification Minor
Foot sockets (con't.)	Fastenings on surfaces that are adjacent to the outside surfaces of the legs		X
Binding strip	Wrong kind		X
	Not locked securely to the top plate		X
	Rough edges or rough joints		X
	Shape of inside surface of bead does not conform to beveled edge of top material.		X
	Higher than top surface	X	
	Not at least flush with edge mold. Extends more than 1/16 inch beyond edge mold.		X
Drawer pulls	Not securely attached (moves independently of drawer when slight vertical or horizontal pressure is applied).		X
	Any part of pull attachment projects beyond inside drawer front.		X
	Fastenings visible when drawer is closed.		X
Tops	Wrong material (includes top plate covering)	X	
	Number of plies less than specified (Applicable to type II stand only)		X
	High or low areas; plies separated.	X	
	Oil canning of top plate		X
	Not secured as specfied	X	
	Spot welds show through plastic sheet		X.
Aprons	Do not properly attach to top and legs		X
	Not secured to top plate or edge molding as specified.		X
Legs	Do not attach to stand properly		
Drawer housing	Does not enclose sides, bottom and back of drawer.	X	
	Lower left horizontal edge not formed to a minimum 3/8 inch radius and lower left front corner not formed to correspond to radius of lower left horizontal edge.	X	
	Drawer suspension not rigidly secured by means specified and not reinforced, if necessary.	X	
	Not rigidly or properly attached to the aprons and top or to the top and legs by the means specified.	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

TABLE IV. Classification of end item defects (con.)

Examine	Defects	Classification Major	Classification Minor
Drawers and drawer suspension	Do not squarely fit, unusual force needed to operate	X	
	Drawer falls out unintentionally when extended	X	
	Suspension not rigidly secured	X	
Stationery trays	Tops not on same plane		X
	Will not permit clearance of paper when filled to capacity.	X	
	Shifts when drawer is opened or closed in normal manner or when paper is removed.		X
	Single four-compartment unit does not fit properly inside drawer.		X
	Trays or tray supports have sharp or pointed surfaces.	X	
Base (Type II stands)	Horizontal stretchers at top of base do not touch underside of the stand top.	X	
	Any component of base interferes with user.	X	
	Does not provide secure mounting for casters.	X	
	Elevating mechanism distorts or collapses (when elevated) under weight of 13 inch carriage electric typewriter or under equivalent weight.	X	
	Elevating device not positive locking.	X	
	Wobbles when resting on its glides		X
	Any component has sharp or hazardous surfaces.	X	
Leaves	Not of same construction as top (unless stands have an open top).	X	
	Not at same level as top when raised		X
Adjustable typewriter platform	Vibrates during operation of typewriter placed thereon.	X	
Identification marking	Missing, not permanent, or is illegible, incomplete or incorrect.		X

4.3.2.2 Examination of assembly. Stands unassembled for knocked-down shipment shall be selected from each inspection lot, assembled and examined in accordance with the defects specified in Table V. The inspection level and acceptable quality level shall be as specified in 4.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

TABLE V. Visual defects of assembly

Examine	Defect
Assembly	Requires special tools for assembly.
	Not easily assembled, i.e., requires modifications, distortion of parts, excess force, or enlargement of holes.
	Assembled stands out of shape.
Assembly instruction	Missing, illegible, or incorrect.

4.3.2.3 Dimensional examination. Inspection will be made of stands for compliance with dimension specified. Any dimension not within the tolerance specified will be classified as a defect. The inspection level and acceptable quality level shall be as specified in 4.4.

4.3.3 Examination of preparation for delivery. An examination shall be made to determine that packing, packaging and marking as required by section 5 of this specification are complied with. Defects will be scored as specified in table VI. The sample unit shall be one shipping container fully prepared for delivery. The lot size shall be the number of containers in the inspection lot. The inspection level and acceptable quality level shall be as specified in 4.4.

TABLE VI. Preparation for delivery defects

Examine	Defect
Marking	Omitted; incorrect; illegible; of improper size, location, sequence or method of application.
Materials	Components missing, damaged or otherwise defective, affecting serviceability.
Workmanship	Inadequate application of components such as incomplete closure of case liners, inadequate securing of legs and leaves, sealing and cushioning inadequate, improper, or missing.

4.4 Inspection levels and AQL's. The inspection levels and acceptable quality levels (AQL's) expressed in defects per hundred units shall be as follows:

For examination in	Inspection levels	AQL's	
		Major	Total
Table IV	II	4.0	10.0
Table V	S-2		4.0
4.3.2.3	S-2		4.0
Table VI	S-2		4.0

4.5 Tests.

4.5.1 Performance tests. Except as permitted in 4.5.1.2 the following tests shall be performed on fully assembled stands using inspection level S-1 for selection of the number of stands to be tested from any lot. Type II stands shall be tested in a non-elevated position. Failure to pass any test shall be cause for rejection of the lot represented by the sample stand (s) under test.

4.5.1.1 Test for evenness of legs. The stand to be tested shall be placed on a flat level surface. A strip or feeler gage at least 1/16 inch but not greater than 5/64 inch thick shall be used in an attempt to slide the strip or feeler gage under each leg. If the strip or feeler gage passes under any leg without touching it, the stand shall be considered as having failed the test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

4.5.1.2 Test for top deflection and rigidity. Apply a weight of not less than 350 pounds on type I units and 250 pounds on type II and type III units, for at least five minutes to an area not to exceed 12 inches in diameter. The test area shall be in the center of the machine support area. The top or machine support area, as applicable, shall not deflect more than 1/8 inch during the test and no part of the stand shall take a permanent set. Type II stands may be tested without rubber cushioned glides.

4.5.1.3 Adjustable platform test. The adjustable typewriter platform shall be loaded with a weight of not less than 300 pounds. While under the load the mechanism shall adjust easily and smoothly throughout its entire range without binding, becoming out of line or deforming any of the parts.

4.5.2 Bend test for steel sheets. The steel sheets used for parts to be formed shall withstand a 180 degree bend around a radius not greater than the thickness of the metal being tested, with and across the grain, at room temperature, without showing any cracks or fractures on the outside of the bend.

4.5.3 Finish tests for steel panels. The finish tests shall be performed on 20 gage sample panels prepared in accordance with 3.5.1.1 through 3.5.1.3.

4.5.3.1 Hardness test. The dried film shall withstand the firm stroke of a 2H pencil held at a 45 degree angle and pushed across film surface, without evidence of marring when viewed at an oblique angle in a strong light.

4.5.3.2 Flexibility test. The dried film shall show no evidence of cracking or flaking under seven power magnification after a finished panel has been bent through 180 degrees over a 1/8 inch diameter rod.

4.5.3.3 Adhesion test. The dried film shall not be removed from the panel when the latter has been scored with a razor blade through the film to the base metal in such manner as to produce a grid of 1/8 inch squares, and a one inch wide piece of cellophane tape, Scotch brand No. 600, or equal, is applied firmly to the grid surface and then quickly pulled from the surface.

4.5.4 Spot welds. Spot welds shall meet the peel test of MIL-W-12332 and button diameter shall be as specified therein.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A, B, or C as specified (see 6.2).

5.1.1 Level A.

5.1.1.1 Type I stands, knocked-down.

5.1.1.1.1 Legs. The legs shall be removed from the stand and the attaching hardware placed in either a cloth draw string bag or a plastic bag, sealed and placed within the shipping container in such a manner as to prevent loss upon opening. The legs shall be individually wrapped in a sheet of 40 pound basis weight kraft paper (24 x 36 - 500), conforming to UU-P-268, and overwrapped in pairs in at least one complete thickness of paperboard cushioning conforming to type I of PPP-P-291, and secured with either tape or twine to prevent unraveling during shipment or storage.

5.1.1.1.2 Drawer. The drawer pulls shall be padded with cushioning of sufficient thickness to prevent damage to the drawer or the shipping container while in transit or storage. The drawer shall then be immobilized by means of metal drawer clips to preclude opening or damage while in transit or storage. Metal drawer clips shall be provided with cushioning to prevent press of indentation marks to surface of rails, post and drawer front contacted by them in application. Alternatively, the drawers may be immobilized by means of cellulosic wadding strips. The strips shall be secured in place with pressure sensitive tape.

5.1.1.1.3 Stand top. All finished surfaces of the stand top shall be completely covered with a sheet of machine glazed kraft paper, highly calendered kraft paper, or waxed paper having a minimum basis weight of 30 pounds per ream (24 x 36 - 500). The paper shall be taped to the underside of the apron.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

5.1.1.2 Type II stand, knocked down. The legs and cross braces, complete with bolts and nuts in place shall be individually wrapped in a sheet of kraft paper having a minimum basis weight of 40 pounds (24 x 36 - 500) conforming to UU-P-268, and secured with twine or tape to prevent unraveling during handling and shipment. Alternatively, the bolts and nuts may be packaged in a bag as specified in 5.1.1.1.1. All finished surfaces of the top and leaf or leaves shall be completely covered with a sheet of machine glazed kraft paper having a minimum basis weight of 30 pounds. The paper shall be taped to the underside of the top or leaf.

5.1.1.3 Type II stand, set-up. The top of the stand and leaf or leaves shall be wrapped and cushioned as described in 5.1.1.2. The drop leaf or leaves shall be dropped to the side (folded) and immobilized by securely tying with twine.

5.1.1.4 Type III stands, set-up. The drawer pulls, drawer and adjustable platform shall be secured as specified in 5.1.1.1.2 and the stand top, apron, and glides shall be protected as specified in 5.1.1.1.3.

5.1.2 Level B, civilian agencies. Level B packaging shall be as specified in 5.1.1.

5.1.3 Level C. The stands shall be packaged in accordance with the manufacturer's normal practice providing that this will insure protection for the stand during shipment and will provide for safe delivery to its destination.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A.

5.2.1.1 Type I stands, knocked-down. The legs, packaged as specified in 5.1.1.1.1 shall be positioned lengthwise against the front and rear apron of of the stand and secured to prevent movement. The complete stand prepared as specified in 5.1.1.1 shall be packed in a fiberboard box constructed and closed to conform to PPP-B-636, grade V3c or V3s, style FTC. Necessary cushioning or filler pads, fabricated from material conforming to type CF, class domestic, variety SW, grade NT of PPP-F-320 or from any non-marring cushioning material conforming to PPP-C-843 shall be added to insure a tight pack. Each shipping container shall be provided with a case liner conforming to type I or II, grade B or C, class 2 of MIL-L-10547. Two stands packed as above shall be overpacked in a snug fitting shipping container constructed and strapped to conform to overseas type of PPP-B-585. Only one type, style and size shipping container shall be used for any one item on any one contract.

5.2.1.2 Type II stands, knocked-down. Components of the stands, packaged as specified in 5.1.1.2 shall be packed in a fiberboard shipping container conforming to PPP-B-636, class, weather-resistant, grade V3c or V3s, style FTC. Necessary cushioning or filler pads of materials cited in 5.2.1.1 shall be added to insure a tight pack.

5.2.1.3 Types II and III stands, set-up. The stands, prepared as specified in 5.1.1.3 and 5.1.1.4 shall be packed individually in fiberboard boxes conforming to style RSC, grade 275 of PPP-B-636. In addition, a four piece wood frame, constructed of approximately 5/8 x 2 inch soft-wood or plywood shall be provided under the legs of the stand to prevent furniture from contacting container bottom. The frame shall be clinch-nailed (approximately 1/4 inch) with not less than two nails at each point of attachment. Cushioned casters and other protrusions shall not extend over the edge of the wood frame. The top shall be cushioned with interior forms or pads fabricated from material conforming to type CF, class domestic, variety SW, grade NT, of PPP-F-320, or from any non-marring cushioning material conforming to PPP-C-843 to provide a minimum 3/4 inch clearance between top and sides of the stand and interior surfaces of the container. All flaps of the fiberboard boxes shall be securely sealed with an adhesive commercially used for the specific product being packed by application throughout the entire area of contact between the flaps, or by a combination of metal stitching the bottom flaps and sealing the top flaps with the adhesive. Two stands of one type only shall then be overpacked as specified in 5.2.1.1.

5.2.2 Level B.

5.2.2.1 Type I stands, knocked-down. The legs, packaged as specified in 5.1.1.1.1 shall be positioned lengthwise against the front and rear apron of the stand and secured to prevent movement. The complete stand, prepared as specified in 5.1.1.1 shall be packaged in a fiberboard box constructed and closed to conform to PPP-B-636, type CF or SF, class domestic, grade 275, style FTC. Necessary cushioning, or filler pads of materials cited in 5.2.1.1 shall be added to insure a tight pack.

5.2.2.2 Type II and III stands, set-up. The set-up stands shall be packed as specified in 5.2.1.3 except that the overpack and case liner shall not be required. In addition, the shipping container may be closed and sealed with tape conforming to PPP-T-45, class 2, in lieu of the adhesives cited. The tape shall be at least 3 inches wide.

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:41Z
Check the source to verify that this is the current version before use.

5.2.2.3 Type II stands, knocked-down. Components of the stand, prepared as specified in 5.1.1.2, shall be packed in a fiberboard shipping container conforming to PPP-B-636, type CF or SF, class domestic, grade 275, style FTC. Necessary cushioning, or filler pads, of materials cited in 5.2.1.1 shall be added to insure a tight pack.

5.2.3 Level C. Stands packaged as specified in 5.1 shall be packed in containers that will assure carrier acceptance and safe arrival at destination in compliance with the Uniform Freight Classification rules and the National Motor Freight Classification rules.

5.3 Marking.

5.3.1 Civilian agencies. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with Fed. Std. No. 123 and as specified in 5.3.3.

5.3.2 Military agencies. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129 and as specified in 5.3.3.

5.3.3 Additional marking. In addition to the marking specified herein, arrows or prominent marks shall be placed on the side of each shipping container to indicate the position in which the container shall be handled during shipment. The word "UP" shall be placed at the point of the arrows in letters at least 2 inches in height. The front panel of each shipping container shall be plainly marked as follows:

UP FURNITURE UP

FRAGILE, HANDLE

WITH CARE

Top panels shall be plainly marked as follows:

FURNITURE

FRAGILE, HANDLE WITH CARE

TOP

THIS SIDE UP

6. NOTES

6.1 Intended use. The type I stands covered by this specification are intended for use where floor space or work duties are limited or when regular standard typewriter desks are not available. The type II stand is designed to be used in addition to a standard desk to support either a typewriter or another type of office machine and is portable so that it can be moved from desk to desk as required. The type III stand is for use where it is desirable to have a variable height typing platform.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

(a) Number, title and date of this specification.
(b) Type and size of stands required (1.2.1).
(c) When preproduction sample requirement is waived (3.1).
(d) When type II stands are to be shipped fully assembled (3.3.6.1).
(e) When plastic covered tops are required on types II and III stands (3.3.6.3 and 3.3.7.3).
(f) When adjustable channels and cups are required in lieu of top on top II stand (3.3.6.3).
(g) If leaf or leaves required on type II stand (3.3.6.4).
(h) When wood tops (and wood leaves, if applicable) of types II and III stands are to be furnished in gray (3.5.2.3).
(i) Special or military markings required (3.6).
(j) Level of packaging and packing required (5.1 and 5.2).

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:41Z
Check the source to verify that this is the currentversion before use.


6.3 Standard color samples. Standard color samples of the finish, and plastic sheet for type I stands are obtainable from the Regional Business Service Centers, Federal Supply Service, General Services Administration.

6.3.1 Color, pattern and finish of laminated plastic for type I stands. The following products exemplify the GSA-FSS standard sample as to color, pattern and finish of laminated plastic for type I stands.

(a) Enjay Fiber and Laminates Co. - Nevarmar Product No. LH-7-1 white leather, LSO finish.
(b) Formica Corp. - Product No. 77-249-33.
(c) General Electric Corp. - Textolite, Product No. S-759, unbrushed textured.
(d) Pioneer Plastics Corp. - Pionite, No. 8-LEA-2 white leathertone, matte finish.
(e) Westinghouse Corp. - Micarta, No. 81-M-60 white cowhite, oil rub.
(f) Reiss Associates, Inc. - Railite, No. NW-861-0, oiled texture finish.
(g) Den-Gre Plastics Co., Inc. - Lamilite, Product No. 525, white leather, matte finish.
(h) Ralph Wilson Plastic Co. - Wilson Art, Product No. 2970, velvet finish.

GSA DC 71 13230

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:41Z
Check the source to verify that this is the current version before use.

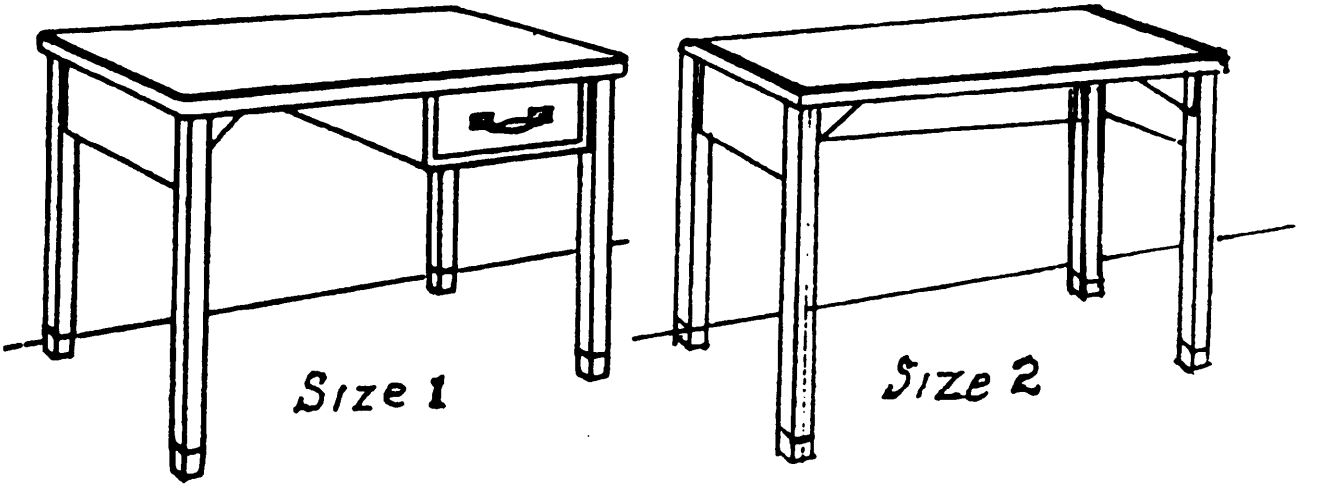

TYPE I

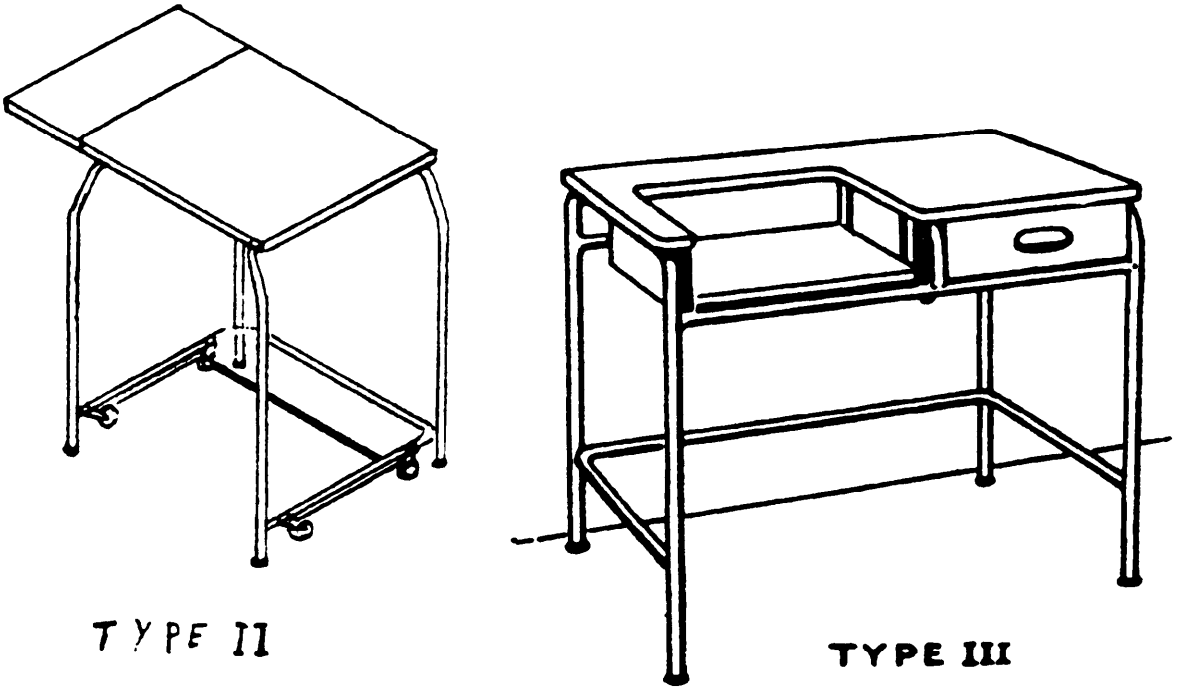


FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:41Z
Check the source to verify that this is the current version before use.

GENERAL SERVICES ADMINISTRATION - FEDERAL SUPPLY SERVICE

SPECIFICATION COMMENT SHEET

BUDGET BUREAU NO. 29-R0175

INSTRUCTIONS

This form provides a way for users of this specification to inform the originator of problems encountered in its use. It is not to be used to request changes to accommodate proprietary features. All comments will be considered and appreciated, but please do not expect a reply. To comment: detach, complete, and mail to: General Services Administration, FSS (FMSF), Wash., DC 20406.

NOTE: Comments on this form do not constitute or imply authorization to waive any part of the document or serve to amend contractual requirements.

1. SPECIFICATION

AA-S-00680E(GSA-FSS) Stands, Office Machine

2. CONTRACT NO. *(If any)*	3. QUANTITY ON CONTRACT *(Optional)*	4. DOLLAR VALUE *(Optional)*

5. GENERAL NATURE OF PROBLEM *(e.g., inspection difficulties, manufacturers unable to meet tolerances, containers collapse under normal warehousing conditions, etc.)*

6. SPECIFIC REQUIREMENTS AFFECTED *(Include paragraph number and lines of wording)*

7. SPECIFIC PROBLEMS *(e.g. tests in 4.2.2 will not assure that the battery will last required time; temperature ranges in table 2 do not conform to commercially available items.)*

8. RECOMMENDATIONS

9. NAME OF MANUFACTURER, ASSOCIATION, GOVT., AGENCY, ETC.	10. ADDRESS *(Number, Street, City, State and Zip Code)*

11. NAME AND TITLE OF SUBMITTER	12. DATE

FORM GSA FEB 69 2200

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:41Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.