KK-B-6508
24 MAY 1986
SUPERSEDING
KK-B-650A
2 July 1970

FEDERAL SPECIFICATION

BRIEF CASE

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE.

1.1 Scope. This specification covers the requirements of leather briefcases.

1.2 Classification.

1.2.1 Types, sizes, and classes. The briefcases shall be of the following types, sizes and classes as specified (see 6.2 and figure 1 through 4).

Type I - Navigational (medium), 17 by 11 inches.

Type II - Investigators, 18 by 12 inches.

Type III -Navigational (large), 20 by 13 by 14 inches.

Type IV - General purpose (medium), 16 by 14 inches.

Type V - General purpose (large), 18 by 15 inches.

Type VIII - Navigational (small), 16 by 11 by 6 inches.

Type IX - Navigators, BGU-1/P 22 by 15 1/4 by 8 1/2 inches.

Class 1 - Leather.

1.2.2 Colors. The briefcases shall be of the following colors, as specified (see 6.2). The shade listed for the color number indicated in FED-STD-595.

Brown - 10080

Brown - 10032

1.2.3 Finishes. The briefcases shall be furnished in the following finishes, as specified (6.2).

Smooth.

Embossed in coarse grain.

FSC 8460

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS.

2.1 The following documents, of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATION

FEDERAL

V-F-106	Fastener, Slide Interlocking
V-T-285	Thread, Polyester
V-T-291	Thread, Linen
V-T-295	Thread, Nylon
KK-L-154	Leather, Cattlehide, (Bag and Case).
QQ-B-626	Brass, Leaded and Non-Leaded Rod, Shapes, Forgings and Flat Products with Finished Edges (Bars and Strip).
UU-P-553	Paper, Wrapping, Tissue.
CCC-A-700	Cloth, Coated, Vinyl (Artificial Leather).
PPP-B-636	Box, Shipping, Fiberboard.
PPP-F-320	Fiberboard; Corrugated and Solid, Sheet Stock (Container Grade), and Cut Shapes.

(Activities outside the Federal Government may obtain copies of Federal specifications, standards, and commercial item descriptions as outlined under General Information in the Index of Federal Specifications, Standards and Commercial Item Descriptions. The Index, which includes cumulative bimonthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S.Goverment Printing Office, Washington, DC 20402.)

(Single copies of this specification, and other Federal specifications and commercial item descriptions required by activities outside the Federal Government for bidding purposes are available without charge from General Services Administration Business Service Centers in Boston, MA; New York, NY; Philadelphia, PA; Washington, DC; Atlanta, GA; Chicago, IL; Kansas City, MO; Forth Worth, TX; Houston, TX; Denver, CO; San Francisco, CA; Los Angeles, CA; and Seattle, WA.)

MILITARY

MIL-T-3530	Thread and Twine, Mildew Resistant or Water Repellent Treated.
MIL-C-7219	Cloth, Duck, Nylon

STANDARDS

FEDERAL

FED-STD-123	Marking for Shipment (Civilian Agencies).
FED-STD-191	Textile Test Methods.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

FED-STD-311	Leather, Methods of Sampling and Testing.
FED-STD-595	Colors.
FED-STD-751	Stitches, Seams and Stitchings.

MILITARY

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	Marking for Shipment and Storage.
MIL-STD-130	Identification Marking of U.S. Military Property.
MIL-STD-147	Palletized Unit Loads.

DRAWINGS

AIR FORCE

59J4051	Brief Case BGU-1/P-Navigators Type IX.

(Copies of military specifications and standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2. Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply.)

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM D 3951	Packaging, Commercial

(Application for copies of ASTM publications should be addressed to the American Society for Tesing and Materials, 1916 Race Street, Philadelphia, PA 19103)

3. REQUIREMENTS

3.1 First article. When specified, a sample shall be subjected to the first article inspection (see 4 and 6).

* 3.2 Basic material. The basic material shall be leather as specified (see 1.2.1). When leather is specified, it shall conform to type II, class 1 of KK-L-154, except that the leather partitions shall be firm, vegetable-tanned split cattlehide with both sides of the partition matching the color and finish of the front and back of the case. Partition leather shall be mildew-resistant treated and shall meet the paranitrophenol requirements specified for class 1 leather of KK-L-154. Material used in the construction of the type IX briefcase shall be in accordance with Drawing No. 59J4051. Partition leather may be cemented or sewn, laminated to finish thickness and as specified in accordance with Drawing No. 59J4051.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

3.2.1 Plastic. The vinyl resin used on parts of the type IX briefcase as specified on Drawing No. 59J4051 shall be homogeneous, flat and resistive to water and warpage.

3.2.2 Color. Unless otherwise specified (see 6.2), the color of the leather shall be brown except that the leather, edges, thread and rivets of the type IX briefcase shall be black.

3.2.3 Finish. Unless otherwise specified (see 6.2), the finish of the leather shall be as hereinafter specified for each type of briefcase.

3.2.4 Edges. The cut edges of the leather shall be stained the color of the briefcase and finished in accordance with commercial practice.

3.2.5 Thread. Thread used in stitching the briefcase shall be 4 ply, Z twist, linen thread conforming to type B, class I of V-T-291 or type I, class I, size B, subclass A of V-T-295, and the color, shall match the color of the leather except that the removal insert assembly of type IX briefcase will be sewn with nylon thread, in accordance with Drawing 59J4051. As an alternate polyster thread, type 1, class 1, subclass A, size 3 in accordance with V-T-285 is permitted in lieu of linen.

3.2.6 Mildew resistance. Unless otherwise specified (see 6.2), linen thread used in stitching the briefcases shall be mildew resistant treated in accordance with class 1 of MIL-T-3530. Nylon or polyester thread need not be treated. All leather used in the construction of the type IX briefcase shall contain a paranitrophenol fungicide. The leather shall contain 0.18 to 0.70 percent fungicide when tested as specified in 4.3.1.

3.2.7 Metal.

3.2.7.1 Hasps and locks. Lock outer casings, hasps, and post loops shall be of not less than one quarter hard brass conforming to copper alloy numbers 260 or 360 of QQ-B-626. The finish shall be bright brass or as specified (see 6.2), with a clear lacquer or other corrosion-resistant finish. The outer metal components of the lock shall be treated to resist corrosion.

3.2.7.1.1 Keys. Two keys shall be furnished for each lock.

3.2.7.2 Buckles, dee rings, rivets, and studs. The buckles, dee rings, rivets, and studs shall be made of bright-finished brass or metal so treated as to be noncorrosive, except as otherwise specified (see 6.2). Buckles shall be single prong, roller type.

3.2.7.3 Reinforcing strips. Reinforcing strips shall be made of steel in accordance with Drawing 59J4051.

3.2.7.4 Staples. The staples for the tie-back loops of type I case shall be steel, nickel plated. The leg length shall be such as to insure a minimum clinch of 1/16 inch and a maximum clinch of 1/8 inch after the staple has penetrated the thickness of the leather.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

3.2.8 Adhesives. Adhesives for bonding the various parts of the briefcases shall be one of the following types:

a. Natural rubber latex.

b. Synthetic rubber latex (including chloroprene).

c. Natural rubber solvent cement.

d. Synthetic rubber solvent cement.

e. Synthetic cement.

3.2.9 Coated cloth. The coated cloth used to cover drop-bottom panels shall have a woven or knitted base cloth and shall have a total minimum weight of 15 ounces per square yard and a minimum breaking strength, warp and filling, of 100 pounds. The color of the coating shall match the color of the briefcase.

3.2.10 Wood. The wood for the type II briefcase shall be sound, seasoned, hardwood and shall have a slope of grain of not more than 1 inch in 10 inches. If plywood is used, the slope requirements is not applicable.

3.2.11 Partitions and body reinforcements. Basic material for partitions forming the pockets and and reinforcement for body (front, back, and flaps) for class 2 briefcases shall be of paper stock impregnated with latex rubber or synthetic rubber combination thereof, or plain chipboard of a stiffness suitable for the intended purpose. The basic material shall have a minimum bursting strength of 55 pounds and a minimum thickness of 0.025 inch.

3.2.12 Protective treatment. The use of any protective coating that will crack, chip, or scale with age or extremes of atmospheric conditions is prohibited.

3.2.13 Slide fasteners. The slide fastener shall be brass, 19 1/2 - 1/4 inches long, type V, style No. 11, size MHS of federal specification V-F-106.

3.3 Stitching. Stitching type 301 of FED-STD-751 shall be used. All stitching shall be by a single row with from five to eight stitches per inch and a stitch margin of 3/16 ± 1/16 inch from the edge. At the end of each row of stitching there shall be at least three back stitches, except where reinforced with a rivet or suitably cross-stitched. All thread ends shall be trimmed or seared.

3.4 Tolerance.

3.4.1 Dimensions of briefcases. Unless otherwise specified, a tolerance of plus or minus 1/8 inch will be allowed in the dimensions of the briefcases.

3.4.2 Thickness of partition leather. A tolerance of plus or minus 1/2 ounce (1/128 inch) will be allowed in the thickness of the leather for partitions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

3.5 Gussets. When a gusset is required it shall be a continuous piece of smooth-finished briefcase leather. The color shall match the briefcase color. Gussets shall be turned in at the top from 1 to 1 1/2 inches and secured to the briefcase and partitions at the top edges with capped bifurcated rivets of a color to match the color of the leather. Gussets shall be attached by cementing and stitching to the partitions and to the front and back of the briefcase.

3.6 Type I briefcase. The briefcase shall include a "Vickle" type handle, an extension lock, two straps with buckles attached, and eight loops. Unless otherwise specified (see 6.2), there shall be four equally spaced full length pockets. Unless otherwise specified the briefcase leather shall be embossed in a coarse grain. The finished dimensions of the briefcase shall be 17 inches long and 11 inches high when measured on outside front of the briefcase with the flap open. The front, back, and flap of the briefcase shall have a marginal crease 1 1/4 + 1/8 inches from the edge. When specified (see 6.2), the briefcase shall also include a drop-bottom reinforcement.

3.6.1 Front. The leather for the front of the briefcase shall be one piece of 6 ounce (6/64 inch) briefcase leather, 17 by 11 inches. A cut shall be made horizontally along the front of the briefcase, 1 inch below the top edge and 4 1/2 inches on both sides of the center. The ends of cut shall extend diagonally to the top edge at a distance of 2 inches from the ends of the briefcase.

3.6.2 Back and flap. The leather for the back and flap of the briefcase shall be one piece of 6 ounce (6/64 inch) briefcase leather, 17 by 18 inches. The corners of the flap shall be cut on a nominal radius of 2 inches.

3.6.3 Straps. The leather for each of the two straps shall be one piece of 6 ounce (6/64 inch) briefcase leather. Each strap shall measure 7/8 inch wide and the length of the finished strap exclusive of the buckle shall be 32 inches for a 2-pocket briefcase, 34 inches for a 3-pocket briefcase and 36 inches for a 4-pocket briefcase. Straps shall be creased 1/8 inch from each edge. The buckles shall be retained by a turnback loop 1 5/8 inches long. A leather keeper 1/2 inch wide shall be sewed in the stitching of the turnback loop. The end of the strap extending over the flap shall be punched with five holes, 1 inch apart, beginning 2 1/2 inches from the end.

3.6.4 Strap and handle loops. Each strap shall be held in a place by four leather loops, three similar in design and one designed as a handle and strap loop. Each loop shall be one piece of 6 ounce (6/64 inch) briefcase leather. The loops shall be positioned to hold the strap centers 3 to 3 1/2 inches from the side edges of the briefcase. Two loops shall be on the back of the briefcase, one on the front, and the handle and strap loop on the top. The handle and strap loop shall be used for restraining the strap and for attaching the handle to the briefcase. Each of the strap loops shall be attached to the briefcase by one continuous row of stitching. The start and finish stitching shall be positioned so as to be covered by a strap in the completed briefcase. The handle end of the handle and strap loop shall contain a steel loop through which the dee rings are passed so as to insure all carrying parts to be metal against metal. The handle end of the handle and strap loop shall be secured to the briefcase by riveting (see 3.6.6). All loops shall be finished to match the outside of the briefcase.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

3.6.5 Flap tie-back loop. A flap tie-back loop of briefcase leather shall be positioned on each strap between the fixed strap loops on back panel. The loop shall be closed with staples specified in 3.2.7.4, shall be 1/2 to 5/8 inch wide and 7/8 to 15/16 inch long (inside measurement), and shall permit the free end of the strap to be inserted freely for tie-back purposes.

3.6.6 Flap reinforcement. The flap reinforcement shall be a strip of reinforcing spring steel, 1/2 inch wide and 1/32 inch thick, with smoothed ends. The reinforcing strip shall be placed on the inside surface of the flap immediately under the handle, and shall extend across the flap to within 3/8 inch of either end. The strip shall be perforated in two places at a point to permit attachment with heavy shallow-drilled tubular or solid rivets which pass through the handle loops. The strip shall be covered with one piece of 6 ounce (6/64 inch) briefcase leather, 17 by 1 1/2 inches, stitched to the flap with a single row.

3.6.7 Partitions. The partitions shall be of 4 ounce (4/64 inch) partition leather and shall be full length, forming pockets with a depth of 11 inches.

3.6.8 Gussets. Gussets shall be 3 ounces (3/64 inch) in thickness.

3.6.9 Pockets. Unless otherwise specified (see 6.2), the briefcase shall have four full-length pockets. Each pocket shall have an expansion of 1 1/2 ± 1/16 inches. The expansion shall be measured on the inside of each pocket.

3.6.10 Drop-bottom reinforcement panel. When specified (see 6.2), the briefcase shall include an inner drop-bottom reinforcement panel for each pocket, capable of being readily raised or lowered as required. The stiffener shall be of common commercial type and grade, not less than 3/32 inch thick, approximatley 15 inches long, and the width shall conform to the fully expanded width of each pocket. The stiffener shall be covered with a coated cloth specified in 3.2.9 and cemented with an adhesive specified in 3.2.8. Each panel shall be attached by stitching the plies of coated cloth to the inside bottom of the partition.

3.6.11 Handle. The handle shall be of the round "Vickle" type (paper wound) covered with briefcase leather and lock stitched across the top. The thickness of the leather shall be not less than 3 1/2 ounces (7/128 inch). The handle shall be reinforced with a flat steel strip not less than 0.035 inch thick by 0.20 inch wide. The ends of the steel strip shall loop around two dee rings attached to the ends of the handle. The spread of the handle between the dee rings shall be 5 1/2 ± 1/4 inches. The color and finish of the handle shall match the outside of the briefcase.

3.6.12 Buckles. The buckles shall be 7/8 inch wide, inside dimension.

3.6.13 Lock. The briefcase shall be equipped with a three-position extension lock having a brass outer casing. The lock shall be secured to the front of the briefcase with six steel prongs. The prongs shall be at least 0.030 inch thick with a minus tolerance of 0.002 inches, 0.20 inch wide, and 3/8 inch long. The prongs shall pass through corresponding holes in a metal backing

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

plate and be securely clinched. The backing plate shall be approximately 3 1/4 inches long by 1 7/8 inches wide and 0.020 inch thick. After assembly, the backing plate shall be covered by cementing a 3 by 4 inch piece of buffing leather or coated cloth, as specified in 3.3.9, over the plate. The hasp member of the lock shall be riveted to the flap with small tubular rivets.

3.7 Type II briefcase. The briefcase shall include a solid leather handle with "Vickle" paper core, a 6-hole hasp and staple, padlock, two straps with buckles, 10 leather loops, 2 safety straps, 2, 3, or 4 equally spaced full-length pockets, and a pencil pocket. The briefcase leather shall be smooth finish. The finished dimensions of the briefcase shall be 18 inches long and 12 inches high. The front, back and flap of the briefcase shall have a marginal crease 1 1/4 + 1/8 inches from the edge. The number of full-length pockets shall be as specified (see 6.2)

3.7.1 Front. The leather for the front of the briefcase shall be one piece of 7 ounce (7/64 inch) briefcase leather, 18 by 12 inches. A cut shall be made horizontally along the front of the briefcase, 1 inch below the top edge and 4 1/2 inches on both sides of the center. The ends of cut shall extend diagonally to the top edge at a distance of 2 inches from the end of the briefcase.

3.7.2 Back and flap. The leather for the back and flap shall be one piece of 7 ounce (7/64 inch) briefcase leather, 18 by 20 1/2 inches. The corners of the flap shall be cut on a nominal radius of 2 inches.

3.7.3 Straps. The leather for each of the two straps shall be one piece of 7 ounce (7/64 inch) briefcase leather. Each strap shall measure 1 inch wide exclusive of buckle, shall be not less than 36 inches long for a 2-pocket briefcase, 38 inches for a 3-pocket briefcase, and 40 inches for a 4-pocket briefcase. Strap shall be creased 1/8 inch from each edge. The buckle shall be retained by a turnback loop 1 1/2 inches long. A 1/2 inch leather keep shall be sewed in the stitching of the turnback loop. The free end of the strap shall be punched with five holes 1 1/4 inches apart beginning 2 1/2 inches from the end.

3.7.4 Safety straps. The leather for each of the two safety straps shall be one piece of 7 ounce (7/64 inch) briefcase leather. Each strap shall measure 1/2 inch wide, and shall be sufficiently long to pass loosely over the wood bar, under the main strap, and be riveted at one end to the flap at the strap loop. The other end shall be riveted to the back of the briefcase at the upper back loop with capped bifurcated rivets. Safety straps shall have enough slack so as not to be subjected to the carrying strain when the briefcase is closed.

3.7.5 Loops. Each strap shall be held in place by five leather loops. Each loop shall be one piece of 7 ounce (7/64 inch) briefcase leather. The color and the finish of the loops shall match the outside of the briefcase. Two loops shall be on the back of the briefcase, one on the front, one on the flap, and one on the handle. The handle loop shall be an extension of the loop with which the handle is attached.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

3.7.6 Handle. The handle shall be of the telescopic strap type, and the main body of the handle shall be laminated of strips of briefcase leather. It shall be 6 inches long, 3/4 inch thick, and 1 inch wide at the center tapering to 3/4 wide at the "Dee's." The underside of the handle shall have a "Vickle" type wound paper core, covered with 3 ounce (3/64 inch) leather, to form a comfortable grip for heavy briefcases. The handle shall be reinforced with a flat steel strip not less than 0.015 inch thick and 0.30 inch wide. The ends of the strip shall loop around two "Dee's" attached to the end of the handle. The "Dee's" shall be 1 inch in size. A bar of wood as specified in 3.2.10, 14 inches long by 2 inches wide and 1/4 inch thick shall be covered with gusset leather (see 3.5) by one continuous row of marginal stitching. Prior to stitching of the bar cover, but with the upper surface covered, the handle shall be attached to the bar by means of leather loops riveted to the bar. The loop straps shall be 7/8 inch wide and extend to within 1/2 inch of the ends of the bar, and shall be riveted to form a loop for the straps. The rivet ends shall be countersunk so as not to extend beyond the bottom of the bar. The loops shall be reinforced with a steel strip, similar to the handle reinforcement, where contact is made with the "Dee's" of the handle so that all carrying parts of the handle are metal to metal. All leather parts of the handle shall match the color and finish of the briefcase.

3.7.7 Gussets. The gussets shall be 3 1/2 ounces (7/128 inch) in thickness.

3.7.8 Partitions. The partitions shall be one piece of 5 ounce (5/64 inch) partition leather. The briefcase shall have full-length partitions forming pockets with a depth of 11 inches.

3.7.9 Pockets. The briefcase shall have 2, 3 or 4 full-length pockets (see 6.2). A pencil pocket approximately 9 inches long and 3 1/2 inches deep, shall be stitched to the top front center of the partition located nearest to the back of the briefcase. The pencil pocket shall be made from gusset leather and shall be gusseted so as to have approximately 1 1/2 inch expansion at the top. The flap shall be gusset leather approximately 9 inches by 4 inches and shall be provided with two snap fasteners.

3.7.10 Buckles. The strap buckles shall be 1 inch wide, inside dimensions.

3.7.11 Lock. The briefcase shall be equipped with a six-hole, solid-brass hasp and staple attached by small tubular rivets, and a 1 inch pin tumbler padlock.

3.8 Type III briefcase. The briefcase shall include a double, continuous strap-type handle, four equally spaced full-length pockets, an extension lock, and six loops. The briefcase shall be embossed in a coarse grain. The finished dimensions of the briefcase shall be 20 inches long by 13 inches high by 14 inches wide.

3.8.1 Front. The leather for the front of the briefcase shall be one piece of 7 ounce (7/64 inch) briefcase leather, 20 by 14 inches. The front piece of leather shall be turned under the bottom of the briefcase for a distance of 1 inch and sewn to the bottom.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

3.8.2 Back, top and front flap. The leather for the back, top and front flap of the briefcase shall be one piece of 7 ounce (7/64 inch) briefcase leather, 20 by 33 inches. The corners of the flap shall be cut on a nominal radius of 2 inches. The back piece of leather shall be turned under the bottom of the briefcase for a distance of 1 inch and sewn to the bottom.

3.8.3 Bottom. The leather for the bottom of the briefcase shall be not less than 7 ounces (7/64 inch) briefcase leather. The bottom shall be reinforced with 5 ounce (5/64), briefcase leather. The binder board 0.090 inch thick, shall be used for strengthening the bottom. The bottom shall have 8 round metal studs, 3 on each side edge and 2 in the center, evenly spaced.

3.8.4 Ends. The leather for the ends of the briefcase shall be 7 ounce (7/64 inch) briefcase leather and reinforced with partition leather (see 3.6.7). The ends of the briefcase shall be sewn to front, back, and bottom, flush-edged and finished completely around sides and bottom.

3.8.4.1 End flaps. The briefcase shall have two end flaps, each 6 by 14 inches. The leather for the end flaps shall be boarded 3 ounce (3/64 inch) briefcase leather. The end flaps shall be sewn to the top of the ends between the briefcase leather and the split-cattlehide reinforcement.

3.8.5 Handles. The handles shall be double-strap type. The leather for the handles shall be 7 ounce (7/64 inch) briefcase leather. They shall be formed by a continuous strap approximately 1 1/4 inches wide extending entirely around the briefcase. The strap may be one or two pieces. Joints shall be stitched and riveted and located at the bottom of the briefcase. The handles shall be held together at the top by a 4 1/2 by 4 1/2 inch, 3 ounce (3/64 inch) briefcase leather tab with rivet steel tabular. The tab shall be fastened to one strap by stitching.

3.8.6 Loops. The handle straps shall be held in place by six loops. Each loop shall be one piece of 7 ounce (7/64 inch) briefcase leather. The loops shall be securely stitched, 2 on the front of the briefcase, 2 on the back, and 2 on the bottom covering the riveted ends of the straps.

3.8.7 Partitions. Each partition shall be made from not less than 5 ounce (5/64 inch) partition leather. Each partition shall be sewn to the ends of the briefcase and in addition, at the top edge, shall be fastened with a capped bifurcated rivet of a color to match the briefcase leather. The partitions shall be 11 1/2 inches in height.

3.8.8 Corners. The lower corners shall be reinforced by a securely sewn strip of 5 ounce (5/64 inch) briefcase leather. It shall be approximately 2 1/2 inches wide with rounded corners, and shall extend across the bottom and up the front and back panels of the briefcase approximately 2 1/2 inches.

3.8.9 Lock. The briefcase shall be equipped with a lock as specified in 3.6.13.

3.9 Types IV and V briefcases. Each briefcase shall open at the top, include three full-length pockets, a metal 3-position extension lock, four leather-covered metal reinforcements, and a "Vickle" type handle. The brief-

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

ase leather shall be smooth finish. The finished outer dimensions of the type IV briefcase shall be 16 inches long, by 14 inches high and type V briefcase shall be 18 inches long by 15 inches high. The briefcases shall be extensible to a width of approximately 7 inches. The bottom of the briefcase shall have six metal studs evenly spaced so as to give proper support to the bottom.

3.9.1 Front and back panels. The front and back panels shall each be of one piece of 6 ounce (6/64 inch) briefcase leather, 16 by 14 inches for type IV briefcase and 18 by 15 inches for type V briefcase.

3.9.1.1 Front and back reinforcement. The front and back panels shall each have two diagonal reinforcement strips. The leather cover for each metal reinforcement shall be one piece of 6 ounce (6/64 inch) briefcase leather. At the bottom corner the leather shall be 3 inches wide, tapering to a width of 1 1/4 inches at the top. The metal reinforcement strips shall be clock spring steel 0.025 inch thick by 1/2 inch wide and 8 inches long with rounded ends. The steel strip shall be bonderized and cemented between the leather body of the briefcase and the leather covering. The leather covering shall be marginal-stitched to the briefcase.

3.9.2 Gussets. Gussets shall be 3 ounces (3/64 inch) in thickness.

3.9.2.1 Gusset reinforcement. The ends of the gusset shall be reinforced with 3 ounce gusset leather at both hinge joints, cut semicircular on a 1 inch radius. The leather reinforcement shall be centered at the hinged joints of the metal frame and stitched to the inside of the gusset.

3.9.3 Partitions. The partitions shall be made from 4 ounce (4/64 inch) thick leather. The partitions shall be full length, forming pockets approximately 8 inches deep, and shall be stitched to the ends and bottom of the briefcase and the top of the stitching shall be reinforced with a capped bifurcated rivet colored to match the briefcase leather.

3.9.4 Pockets. The briefcase shall have three full-length pockets. The two outside pockets shall each have an expansion width of 1 1/2 inches and the middle pocket an expansion of 4 inches.

3.9.5 Drop-bottom reinforcement panel. The middle pocket of the briefcase shall have a drop-bottom reinforcement panel 4 inches wide by 14 inches long for type IV, and 4 inches wide by 16 inches long for type V. The stiffener shall be of common commercial type and grade, not less than 3/32 inch thick, and shall be covered with coated cloth specified in 3.2.9. The panel shall be securely attached to the bottom of one of the partitions forming the center pocket and designed so as to support the case in an upright position, as required, when panel is in down position.

3.9.6 Bottom. The bottom of the briefcase shall have six metal studs evenly spaced on the outer surface. The studs shall have bifurcated ends and shall be clinched over a reinforcement disc of briefcase leather on the inside of the bottom of the bag.

3.9.7 Lock. The briefcase shall be equipped with a lock as specified in 3.6.13.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

3.9.8 Lock flap and pull tab. The leather for the lock flap shall be 6 ounce (6/64 inch) briefcase leather lined with 3 ounce (3/64 inch) partition leather. The expose length of the flap shall be 5 inches and the width shall be 2 1/2 inches at the top and 1 1/2 inches at the hasp. The end to which the hasp is riveted shall be rounded at the corners. The top of the flap shall be centered between the reinforcement strips on the upper back of the briefcase and caught in the stitching of the leather back and the hinged frame cover. The leather for the pull tab shall be one piece of 6 ounce (6/64 inch) briefcase leather. The pull tab shall be centered between the front reinforcement strips and caught in the stitching of the leather front and the hinged frame cover.

3.9.9 Handle and handle posts.

3.9.9.1 Handle. The handle shall be of the round "Vickle" type (paper wound) covered with 3 ounce (3/64 inch) briefcase leather and lock stitched across the top. The handle shall be reinforced with a flat steel strip not less than 0.035 inch thick by 0.20 inch wide. The ends of the steel strip shall be formed to loop around two post bars so that all carrying parts will be metal against metal.

3.9.9.2 Handle posts. The posts shall be brass-plated steel, 1/4 inch in diameter and shall be fitted with a 1/8 inch brass bar for attaching the handle loops. The posts shall extend through the metal frame and be securely riveted on the inside. The posts shall be positioned on the briefcase so that the spread of the handle will be 4 1/2 $\pm$ 1/4 inches.

3.9.10 Frame. The briefcase shall have a leather-covered, corrosion-resistant steel frame. The frame shall be 0.075 inch thick, half hard, cold-rolled steel and shall have two hinges formed by two heavy, shallow-drilled, tubular rivets. The rivets shall be peened on the inside over metal washers. The hinges shall have metal spacers between the frame sections of the hinge joints.

3.9.10.1 Frame cover. The leather for the frame cover shall be one piece of 3 ounce (3/64 inch) gusset leather. The leather-covered frame shall be stitched to the top edge of the front and back panels and the top edge of the gusset at the side of the briefcase.

3.10 Type VIII briefcase. The general design of the type VIII briefcase shall be as shown in figure 3. The briefcase shall include a double, continuous strap type handle, three equally spaced full length pockets, a four or six hole solid brass hasp and staple with 5/16 inch to 7/16 inch I.D. staple hole.

3.10.1 Front, back, ends, straps, loops. The front, back, ends, straps, and loops shall be made of smooth briefcase leather not less than 7/64 inch in thickness.

3.10.2 Bottom. The bottom shall be made from smooth briefcase leather not less than 7/64 inch thick, reinforced with not less than 5/64 inch thick, split leather colored to match the briefcase and with inner binders board 0.090 inch thick, for strengthening. The bottom shall have eight round metal studs evenly spaced, with three on each side edge and two in the center.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

3.10.3 Ends. The ends of the briefcase shall be made from briefcase leather 7/64 inch (7 ounce) thick, reinforced with firm, split-cattlehide 5/64 (5 ounce) thick.

3.10.3.1 End flaps. The briefcase shall have two end flaps, each 6 inches square, made of boarded briefcase leather not less than 3/64 inch thick. They shall be sewed to the top of the ends between the briefcase leather and split-cattlehide reinforcement.

3.10.4 Partitions. Partitions shall be laminated or solid and made from firm vegetable tanned cattlehide to finish not less than 5/64 inch thick and shall be finished smooth on both sides or colored to match the briefcase.

3.10.5 Handles. The handles shall be double-strap type made of smooth briefcase leather not less than 7/64 inch thick.

3.10.6 Size. The briefcase shall be 11 inches high, 16 inches long, and 6 inches wide.

3.10.7 Locks. The case shall be equipped with a three, four or six hold solid brass hasp and staple securely attached by rivets. Each briefcase shall be equipped with a 1 inch pin tumbler padlock, with two keys. The padlock and keys shall be securely tied to one side of the combination strap handle.

3.10.8 Construction.

3.10.8.1 Ends. The ends of the briefcase shall be sewed to front, back, and bottom, flush-edged and finished completely around sides and bottom.

3.10.8.2 Partitions. The partitions shall be sewed to the end of the briefcase and in addition, at the top edge there shall be capped bifurcated rivets of a color to match the briefcase leather.

3.10.8.3 Back, top, and front flap. The back, top, and front flap shall be of one piece of leather with an over-all length of 23 inches. The corners of the flap shall be cut on a radius of approximately 2 inches. The back and front piece of leather shall be turned under the bottom of the briefcase for a distance of 1 inch and sewed to the bottom.

3.10.8.4 Pockets. The case shall have three equally divided pockets, 2 inches each in width. The front partition of the case shall have two flat pockets measuring 7 by 7 inches, made of not less than 3/64 inch thick boarded case leather.

3.10.8.5 Handles. The handles shall be of the double type formed by a continuous strap approximately 1 1/4 inches wide extending entirely around the briefcase. The strap may be of one or two pieces. Joints shall be stitched and riveted, and located at the bottom of the briefcase. The handles shall be held together at the top by a 4 1/2 inch leather tab with two metal snap fasteners. The tab shall be fastened to one strap by stitching. The handle strap shall be held to the body of the briefcase by six loops.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

3.10.8.6 Loops. The loops shall be securely sewed to the briefcase, two on the front, two on back and two on the bottom covering the lapped ends of the straps. One end of each of the bottom loops shall be sewn between the corner reinforcement piece and the bottom, and the other end of each bottom loop shall be secured by one of the center bifurcated bottom studs as specified in paragraph 3.10.2.

3.10.8.7 Corners. The lower corners shall be reinforced by a securely sewed strip of briefcase leather not less than 5/64 inch thick, approximately 2 1/2 inches wide, with rounded inside corners, and extending across the bottom and up the front and back panels of the briefcase approximately 2 1/2 inches.

3.11 Type IX briefcase.

3.11.1 Design and construction. The design and construction of the type IX briefcase shall conform to drawing 59J4051 and requirements specified therein.

3.11.2 Compartments. The briefcase shall have 3 compartments, 2 of which shall be full length partitions forming pockets.

3.11.2.1 Center compartment. The length of the center compartment can be divided in half by snapping together a small flap.

3.11.2.2 Removal insert. One partition shall have a zipper removable insert containing two pockets, one for small tools and one for navigation watch, retainers for pencils, dividers and screwdrivers. The removal insert shall have a row of stitching along its periphery to prevent separation of the adhered parts.

3.11.3 Handles. The handles of the briefcase shall be 7 ounce leather, cattlehide, strap, vegetable tanned as specified in drawing 59J4051. The finish of the strap shall be smooth, and the color shall be black.

3.11.4 Cementing.

3.11.4.1 Reinforcement strips. The reinforcement strips shall be cemented between the body of the briefcase and the leather covering prior to the stitching.

3.11.4.2 Gussets. Prior to stitching, the gussets shall be cemented.

3.11.5 Partitions. The material and dimensions of the partitions shall conform to the requirements of drawing 59J4051, except firm split leather or cemented or sewn laminated leather may be used. They shall be finished smooth on both sides and colored to match the briefcase.

3.11.6 Capacity. The capacity of the briefcase shall 1.6 cubic feet.

3.11.7 Weight. The weight of the briefcase, exclusive of the tools, shall not exceed 8 1/2 pounds.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

3.12 Identification marking. Unless otherwise specified the following information shall be permanently and distinctly marked in accordance with MIL-STD-130, in a contrasting color on the inside cover of types I, II, III and VIII briefcases and on the underside of the lock flap of types IV, V and IX briefcases. All marking shall be in legible print at least 3/16 inch high.

Briefcase, leather

Type

Class

Federal Specification KK-B-650B

Stock No.

Contract or order number

Manufacturer's name or trademark

U.S. Property

3.13 Workmanship. The finished briefcases shall conform to the quality and grade of product established by this specification. Occurrence of defects shall not exceed the applicable acceptable quality levels.

3.14 Reclaimed materials. The use of reclaimed materials shall be couraged to the maximum extent possible.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

4.2 First article inspection. When required, the first article sample submitted in accordance with 3.1 shall be inspected for compliance with design construction, and workmanship requirements in accordance with 4.3.2.

4.3 Inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105 except when otherwise indicated hereinafter.

4.3.1 In-process inspection. Inspection shall be made at any point or during any phase of the manufacturing process to determine whether operations or assemblies are accomplished as specified. The government reserves the right to exclude from consideration for acceptance any material or service for which in-process inspection has indicated nonconformance.

4.3.1.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be tested in accordance with all the referenced specifications, drawings and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase documents. In addition, testing shall be performed on components and materials listed in Table I.

4.3.2 Inspection of the end item.

4.3.2.1 Examination of the end item. The defects found during examinations shall be classified in accordance with 4.3.2.1.1 and 4.3.2.1.2. The inspection levels and acceptable quality levels shall be as indicated in 4.3.2.1.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

TABLE . Instructions for testing

Component and unit of product	Characteristic	Specification reference		Rqmt. appl. to:		#Det. per spl unit	Results rptd. as:		Sample unit	Insp. level	AQL
		Rqmt. para.	Test Method	Sample unit	Lot avg.		Numerically to nearest	Pass or fail			
Leather (one side)	Mildew resistance	3.2.6 and KK-L-154	6711 FED-STD-311	Composite	-	-	-	-	1/	-	-
Thread (one cone or spool	Mildew resistance	3.2.6	5750 FED-STD-191	X	-	1	-	X	One cone or spool	S-1	6.5
Steel and brass components (1 gross each)	Material identification 2/	3.2.7		X	-	1	-	X	(2 each)	S-1	6.5
	Corrosion resistance 2/	3.2.7		X	-	1	-	X	-	S-1	6.5
Paper stock or chipboard	Material identification 2/	3.2.11		X	-	1	-	X	1 sq. foot	S-1	6.5
	Bursting strength	3.2.11		X	-	1	-	X	1 sq. foot	S-1	6.5
Coated cloth	Breaking strength	3.2.9	5100 FED-STD-191	X	-	5	Pound	-	1 yd.	S-1	6.5
	Wt./oz yd.	3.2.9 59J 4051	5041 FED-STD-191	X	-	5	0.1 ounce	-	1 yd.	S-1	6.5
34 ounce plastic coated sateen (1) yd. full width)	Wt./oz yd.	Drawing	5041 FED-STD-191	-	X	5	0.1 oz/ sq. yd.	-	1 sq. foot	S-1	N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

TABLE I. Instructions for testing - Continued

Component and unit of product	Characteristic	Specification reference: Rqmt para.	Specification reference: Test method	Rqmt. appl. to: Sample Unit	Rqmt. appl. to: Lot avg.	#Det: per spl unit	Results rpld. as: Numerically to nearest	Results rpld. as: Pass or fail	Sample Unit	Insp level	AQL
18 ounce plastic coated sheeting (1 yd. full width)	Wt/sq. yd.	Drawing 59J 4051	5041 FED-STD-191	-	X	5	0.1 oz/ sq. yd.	-	1 sq. foot	S-1	N/A
Chrome plated parts	Plating identification 2/	Drawing 59J 4051		X	-	1	-	X	1 each	S-1	6.5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

1/ The sample unit for this test is one 2 inch X 6 inch piece of leather and the sample size shall consist of 15 pieces, one piece selected from each of 15 sides. Sampling procedure and location from which the sample unit is to be obtained shall be in accordance with FED-STD-311.

*2/ In lieu of test report, contractor may submit a certificate of compliance for this characteristic to the Government representative for verification.

* 4.3.2.1.1 Visual examination. The briefcase shall be examined for defects in color, type design, material, workmanship and marking. The sample unit shall be one completely fabricated briefcase. The lot size shall be expressed in units of one briefcase.

Classification of defects

Examine	Defect	Classification	
		Major	Minor
Color and finish			
Leather components	Color or finish not as specified or does not compare favorably with approved sample.	X	
	Color or finish not uniform.	X	
* Thread	Color does not approximate color of briefcase, affecting appearance.	X	
* Plastic T-Section (if used)	Color does not approximate color of briefcase, affecting appearance.	X	
Cleanness	Any nonpermanent spot or stain, i.e., cement or foreign matter, etc., that is clearly noticeable but can be readily removed with a cleaning agent.		X
	Any permanent type stain or spot clearly noticeable that cannot be removed with a cleaning agent.	X	
Design	Any characteristic not in accordance with the specific requirements and approved sample (unless otherwise indicated herein).	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

Classification of defects - Continued

Examine	Defects	Classification	
		Major	Minor
Material general	Any component not fabricated of the specified material.	X	
Quality of leather	Not full grain leather where required.	X	
	Any hole, cut or rupture.	X	
	Any of the following imperfections present to a degree where the condition will have a serious affect on serviceability or appearance: Grub or tick marks, open or badly healed scratches, brands, boney, loose or pipey leather, or otherwise defective, e.g., open scratch on exterior surface of briefcase.	X	
	Any of the following imperfections present to a degree where the condition will affect serviceability or appearance but not seriously: Grub or tick marks, open or badly healed scratches, brands, boney, loose or pipey leather or otherwise defective.		X
*	Flanky, spongy or stretchy.	X	
*	Fat wrinkles.	X	
Construction and workmanship			
General (applicable to all components and assemblies unless otherwise indicated herein).	Any part fractured, ripped, torn, punctured, malformed or otherwise damaged seriously affecting serviceability.	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

Classification of defects - Continued.

Examine	Defects	Classsification Major	Minor
	More than three continuous stitch locks exposed in surface or leather, but seam is tight.		X
	Tight stitch tension, i.e., stitches rupture leather or may break in use of end item.	X	
	More than two continuous needle holes visible.		X
	Any row of stitching omitted.	X	
*	Less than five stitches per inch.		X
Construction and workmanship			
* Seams and stitching (con.)	Two or more stitches less than number specified.	X	
	More than the specified maximum number of stitches resulting in damage to leather.	X	
	More than the specified maximum number of stitches but does not damage leather		X
	Excessively large needle holes caused by improperly shaped or oversize needle	X	
	Thread ends not trimmed.		X
	Open seam.	(See Note)	

NOTE: When one or more stitches are broken, or two or more consecutive skipped stitches or runoffs occur on a single stitched seam, or on both rows of stitching on a double stitched seam, it shall be classified as a major defect. When one or more stitches are broken, or two or more consecutive skipped stitches or runoffs occur on only one row of a double-stitched seam, it shall be classified as a minor defect.

	Not backstitched or backstitched with less than three stitches.		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

Classification of defects - Continued

Examine	Defects	Classification	
		Major	Minor
* Assembly highlights	Any assembly malformed or distorted affecting serviceability or appearance	X	
	Arrangement of pockets and partitions not as specified.		
	Flap in center compartment not correctly placed.	X	
	Removal insert missing or not as specified.	X	
*	Plastic binding (if used) not neatly or properly attached affecting appearance or serviceability.	X	
	Side fastener or any snap fastener reversed or does not function properly.	X	
	Any metal stud on base missing, misplaced or not securely attached.	X	
	Lock does not function or both keys missing or will not operate lock.	X	
	One lock key provided or one key will not operate lock.		X
	Weight of briefcase exceeds specified maximum.		X
Marking	Missing, incomplete, incorrect, not legible, not specified size, not in proper location or not accomplished as specified.		X

4.3.2.1.2 Dimensional examination. The briefcase shall be examined for defects in dimensions. Any dimension that is not within the tolerances listed below shall be classified as a defect.

Dimensions of cases ± 1/8 inch.

* Thickness of leather ± 1 ounce (+1/64 inch), -1/2 ounce (1/128 inch).

Thickness of paper stock or chipboard - 0.025 inch minimum.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

4.3.2.1.3 Acceptable quality levels (AQLs) and inspection levels. The acceptable quality levels expressed in defects per hundred units and inspection levels shall be as follows:

	Inspection level	AQL Major	AQL Total
* For defects applicable to 4.3.2.1.1	S-2	2.5	6.5
For defects applicable to 4.3.2.1.2	S-3	-	4.0

* 4.3.2.1.4 Examination of preparation for delivery. An examination shall be made to determine that the packaging, packing and marking comply with the section 5 requirements. Defects will be scored in accordance with the table below. The sample unit shall be one shipping container fully prepared for delivery. The lot size shall be the number of containers in the inspection lot. The inspection level shall be S-2 and the acceptable quality level (AQL) shall be 2.5.

Examination	Defect
Markings exterior and interior	Incorrect; illegible; of improper size, location, sequence or method of application.
aterials	Any nonconforming component; component missing, damaged or otherwise defective affecting serviceability.
*Workmanship	Inadequate application of component, such as incomplete closure, container flaps, loose strapping, etc.
	Bulging or distortion of containers.
Weight or content, exterior and interior	Number per container in more or less than required; gross/net weight exceeds requirement.

* 5. PREPARATION FOR DELIVERY.

5.1 Preservation. Preservation shall be level A, or commercial, as specified (see 6.2).

5.1.1 Level A. Each briefcase shall be closed and locked and, where applicable, the straps buckled. The two keys shall be securely tied to the carrying handle. Each briefcase shall be completely wrapped in not less than two sheets of tissue paper conforming to type I of UU-P-553. Each wrapped briefcase shall

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

hen be packaged in an end-opening snug-fitting fiberboard container conforming o type optional, class comestic, grade 200 or better, style FOL of PPP-B-636. Closure shall be in accordance with the appendix of the container specification.

5.1.2 Commercial. Each briefcase shall be packaged in accordance with ASTM D 3951.

5.2 Packing. Packing shall be level A, B, or commercial as specified (see 6.2).

5.2.1 Level A. Twelve type I, II, IV, V and IX briefcases of one type, class, and color only. Four type III briefcases of one color and class only or eight type VIII briefcases of one color and class only, packaging as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to class weather-resistant, grade V2s, style RSC of PPP-B-636. Each shipping container shall be closed, waterproofed and reinforced with flat strapping or tape banding in accordance with the appendix of the box specification.

5.2.2 Level B. Twelve type I, II, IV, V, and IX briefcases of one type, class, and color only. Four type III briefcases of one color and class only, or eight type VIII briefcases of one color and class only, packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to class domestic, grade 275 or better of PPP-B-636. Each shipping container shall be closed in accordance with the appendix to the box specification.

5.2.2.1 When specified (see 6.2), the shipping container shall be grade V3c or V3s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with the appendix of the container specification. The shipping container material may also be grade V3s of PPP-F-320.

5.2.3 Commercial. Briefcases packaged as specified in 5.1, shall be packed in accordance with ASTM D 3951.

5.3 Palletization. Unless otherwise specified (see 6.2), briefcase packed as specified, shall be palletized in accordance with load type I of MIL-STD-147. Such prepared load shall be bonded with primary and secondary straps in accordance with bonding means "K" and "L." Pallet pattern shall be in accordance with the appendix of MIL-STD-147. If the container is of a size which does not conform to any of the pallet patterns specified in MIL-STD-147, the pallet pattern used shall be approved by the contracting officer.

5.4 Marking.

5.4.1 Civil agencies. In addition to any special marking required by the contract or order, interior packages and exterior shipping containers shall be marked in accordance with the requirements of FED-STD-123, or ASTM D 3951 as applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

5.4.2 Military agencies. In addition to any special marking required by the contract or order, interior packages and exterior shipping containers shall be marked in accordance with the requirements of MIL-STD-129 or ASTM D 3951 applicable.

6. NOTES

6.1 Intended use. The various types of briefcases incorporated herein are intended for general use by Government agencies in carrying various documents, legal papers, briefs, navigational data, and other official papers, reports, catalogs, etc.

6.2 Ordering data. Purchasers should select the preferred options permitted herein, and include the following information in procurement documents:

a. Title, number and date of this specification.

b. Type, class color and finish (see 1.2.1, 1.2.2 and 1.2.3).

c. Number of pockets required (types I and II only) (see 3.6.9 and 3.7.9).

d. Whether mildew resistance (of leather and thread) shall be waived (see 3.2.6).

e. Whether identification marking shall be waived or modified.

f. Whether drop-bottom reinforcement is required (see 3.6.10 and 3.9.5).

g. Whether first article is required (see 3.1).

h. Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

i. When weather-resistant boxes are required for level B shipments (see 5.2.2.1).

6.3 Figures. The figures 1 through 4 herein illustrate the general design of briefcases covered by this document and are furnished for informational purposes. To the extent of any inconsistencies between the written specification and the illustrations, the written specification shall govern.

6.4 Supersession data. This specification supersedes KK-B-650A dated 2 July 1970, KK-B-650 dated 16 August 1960.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

Custodian
Air Force - 99

Review activities:
Army - GL
DPSC - TT
Navy - SA

User activities:
Marine Corps - MC
Air Force - 45

Preparing activity:
Air Force - 82

(Project 8460-0069)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

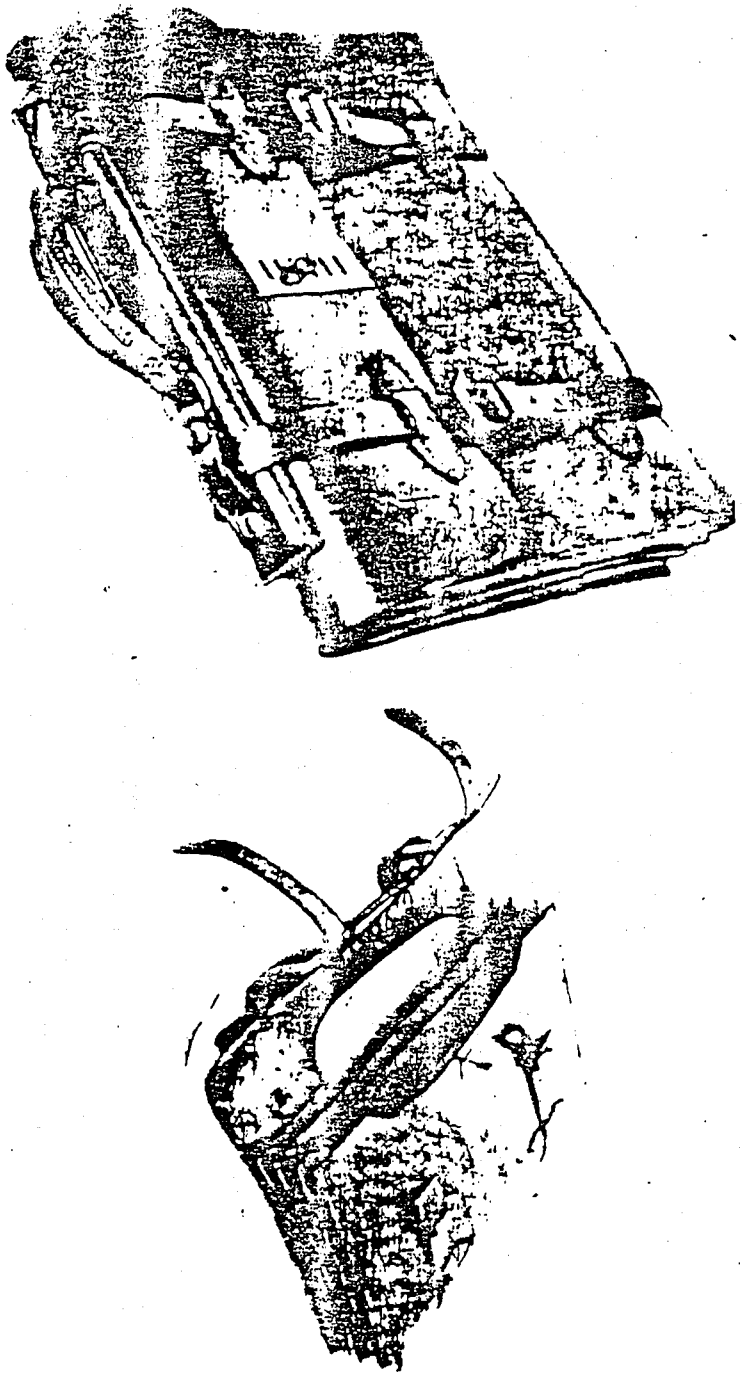


FIGURE 2. Type II, investigators.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

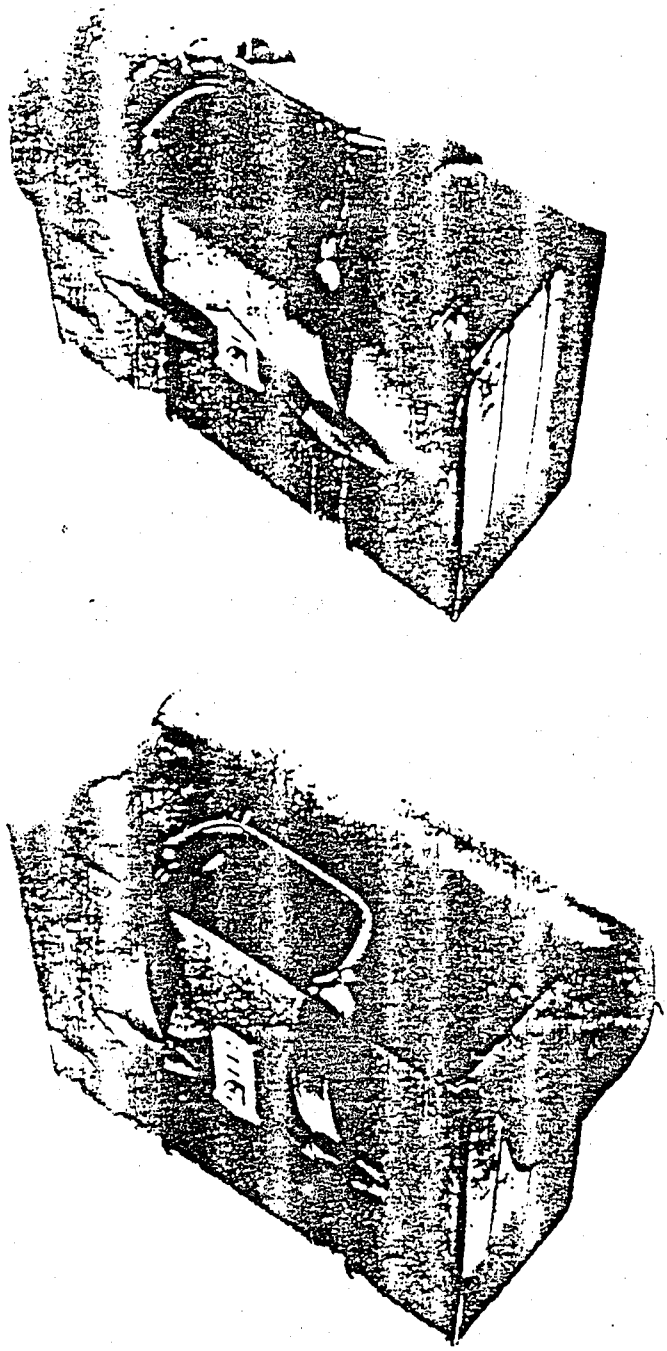


FIGURE 3. Type III and VIII, navigational (large and small)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

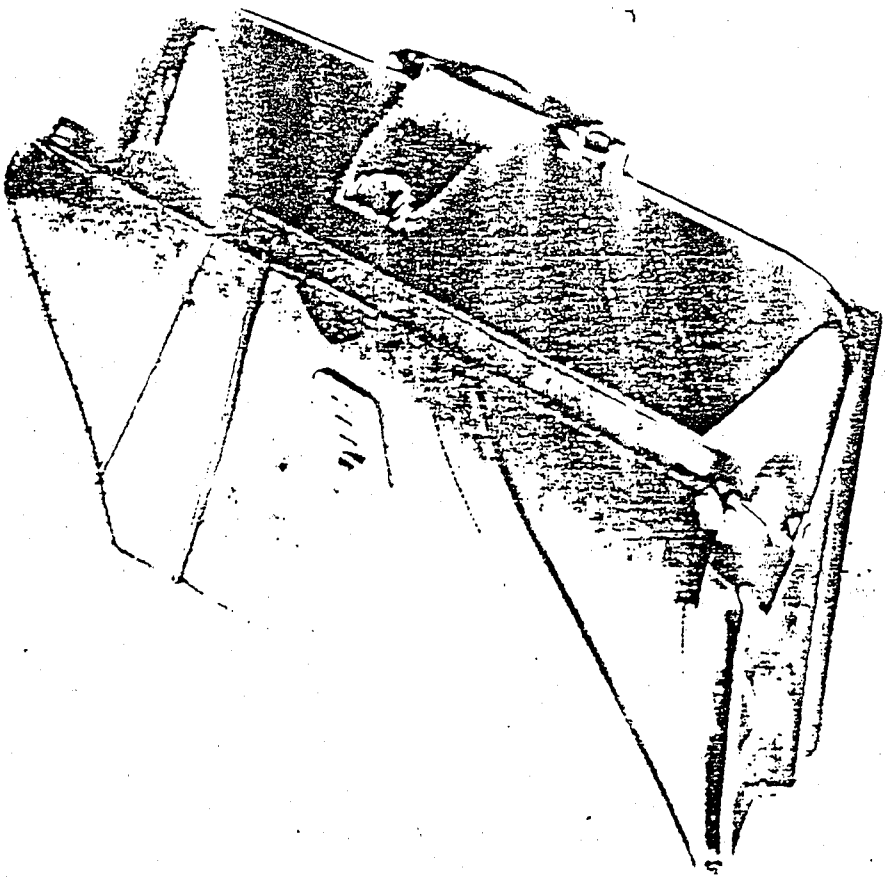


FIGURE 4. Types IV and V, general purpose (medium and large).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
KK-B-650B	Briefcase

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.