NN-H-101e
May 8, 1962
SUPERSEDING
Int. Fed. Spec. NN-H-00101d(GSA-FSS)
June 10, 1958, and
Fed. Spec. NN-H-101a
March 13, 1951

FEDERAL SPECIFICATION

HANDLES, MOP (WET)

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers wood and steel mop handles and two basic types of attached fixtures primarily intended for use with wet-cleaning cotton mopheads procured under T–M–561.

1.2 Classification.

1.2.1 *Types and classes.* Mop handles covered by this specification shall be of the following types and classes as specified in the invitation for bids (see fig. 1 and 6.1) :

Type I.—Screw type or clip type.
Class 1.—Wood handles.
Class 2.—Steel handles (plastic sleeve).
Type II.—Spring-lever type.
Class 1.—Wood handles.

1.2.2 *Sizes.* Mop handles covered by this specification shall be of the following sizes, as specified in the invitation for bids:

Type I:
Size.—72 inches.
Size.—60 inches.
Size.—54 inches.
Type II:
Size.—60 inches.
Size.—54 inches.

2. APPLICABLE SPECIFICATIONS AND STANDARDS

2.1 The following specifications and standards, of the issues in effect on date of invitation for bids, form a part of this specification to the extent specified herein.

Federal Specifications:

L–P–406—Plastics, Organic: General Specifications, Test Methods.
QQ–C–320—Chromium Plating (Electrodeposited).
QQ–N–290—Nickle Plating (Electrodeposited).
QQ–P–416—Plating, Cadmium (Electrodeposited).
QQ–Z–325—Zinc Plating (Electrodeposited).
CCC–C–467—Cloth, Jute (or Kenaf, Burlap).
PPP–B–585—Boxes, Wood, Wirebound.
PPP–B–591—Boxes, Fiberboard, Wood-Cleated.
PPP–B–601—Boxes, Wood, Cleated-Plywood.
PPP–B–621—Boxes, Wood, Nailed and Lock-Cornered.
PPP–B–636—Box, Fiberboard.
PPP–T–45—Tape, Gummed, Paper, Reinforced.
PPP–T–97—Tape, Pressure-Sensitive Adhesive, Filament Reinforced.

Federal Standards:


Fed. Std. No. 102—Preservation, Packaging, and Packing Levels.
Fed. Std. No. 123—Marking for Domestic Shipment (Civilian Agencies).
Fed. Test Method Std. No. 601—Rubber; Sampling and Testing.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications, Standards, and Handbooks and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington 25, D.C.

(Single copies of this specification and other product specifications required by activities outside the


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:58Z
Check the source to verify that this is the current version before use.

Method A

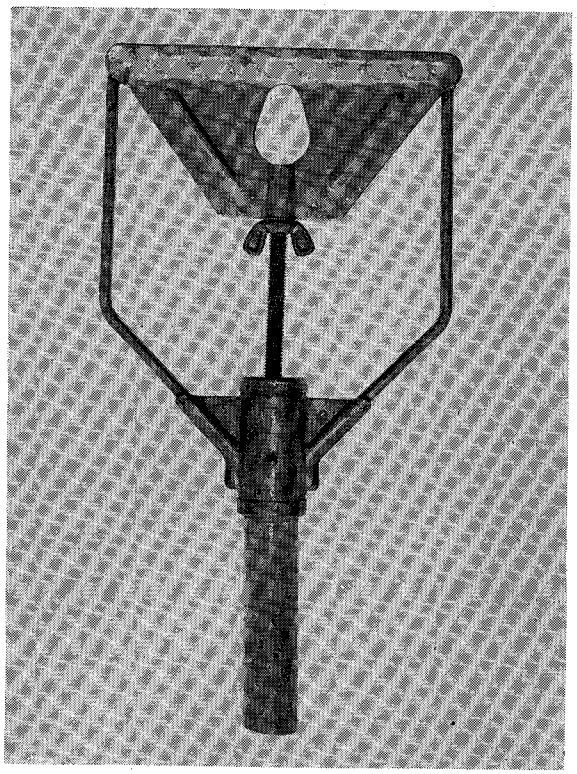


Type I.—Screw type

Method B

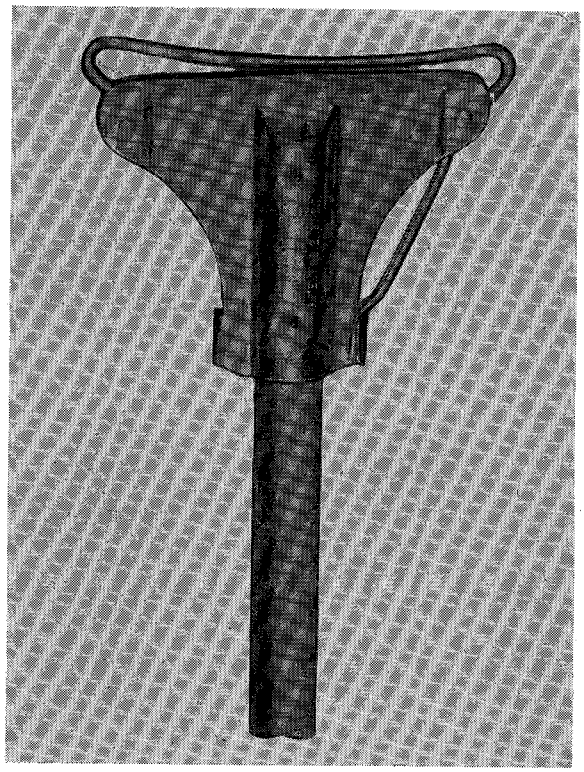

Type I.—Clip type

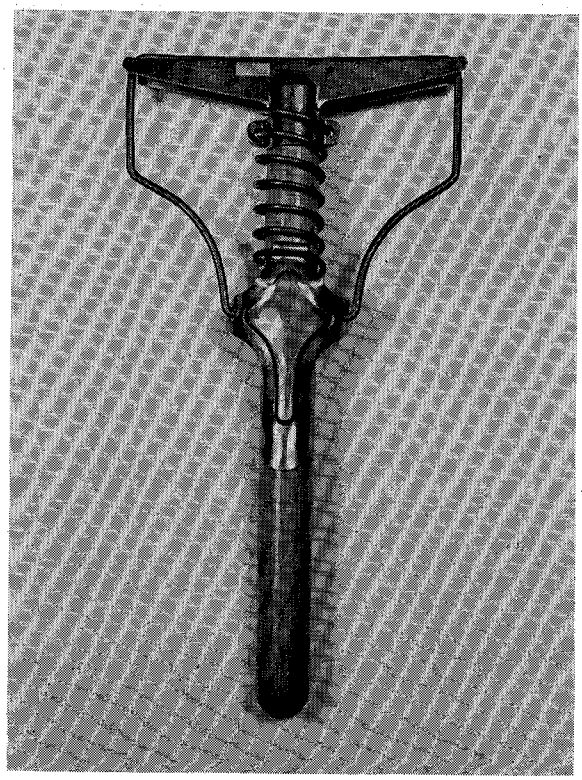

Type II.—Spring-lever type

FIGURE 1.—*Mop handles*

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:58Z
Check the source to verify that this is the current version before use.

Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D.C., Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, and Auburn, Wash.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications, Standards, and Handbooks from established distribution points in their agencies.)

Military Specifications:

MIL-B-138—Boxes; Wood, Fiberboard, Lined for Overseas Shipment (For Weight of Contents Not Exceeding 500 lbs).

MIL-W-6110—Wood, Determination of Moisture Content.

MIL-B-10377—Box, Wood, Cleated, Veneer, Paper Overlaid.

Military Standards:

MIL-STD-105—Sampling Procedures and Tables for Inspection by Attributes.

MIL-STD-129—Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Design. The mop handle shall consist of wood or steel to which are attached metal fixtures for securely holding a mop. The overall length of the handle and the fixtures shall be not less than 54, 60, or 72 inches for type I mops, and 54 or 60 inches for type II mops. (See fig. 1.)

3.2 Handles.

3.2.1 *Wood.* The wood for the handles shall be of straight-grained ash, beech, cherry, birch, elm, hickory, maple, pecan, red gum, red or white oak, Douglas fir or Southern yellow pine. Wood for handles shall be round, uniform in diameter, rounded at the hand end, free from warp greater than 3/8 inch, cup, knots, shakes, wane, wormholes, heart center, rot, dote, and brash. Cross grain and spiral grain with a slope steeper than 1 inch in 15 inches will not be acceptable. The diameter of the handles shall be 1 1/8 inches. When specified, each handle shall have a hole $3/16 \pm 1/32$ inch in diameter, 2 to 3 inches from the hand end, completely through the handle. Moisture content of wood shall be not more than 12 percent, when tested as specified in 4.3.4.

3.2.1.1 *Finish.* Hardwood handles shall be sanded smooth and shall be finished with one heavy coat or two medium coats of transparent varnish, lacquer, or other clear coating. Softwood handles (Douglas fir and yellow pine) shall be sanded smooth and finished with a coating of hard vinyl plastic impervious to strong detergents and perspiration.

3.2.2 *Steel.* The steel for the tubing handles shall be SAE 1020 strip steel of not less than 0.029-inch wall thickness of seamless construction or with the edges welded at not less than four equidistant points along the seam. The tubing shall be in one section measuring not less than 7/8-inch outside diameter.

3.2.2.1 *Plastic sleeve.* The steel tubing shall be covered with a colored plastic sleeve made from a virgin vinyl polymer of 90 hardness when tested with a type A Shore durometer, 4.3.3. The wall thickness of the plastic shall be not less than 0.025 inch, and shall be shrunk tightly onto the steel tubing. The sleeve shall be unaffected when subjected to a high-low temperature test as specified in 4.3.1. The sleeve shall withstand a voltage of not less than 6,000 RMS, 60 c/s when tested as specified in 4.3.2. The finished handle shall have a molded dome-shaped vinyl cap of the same material and color as the sleeve, securely cemented to the hand end of the handle forming a closed end, or a rubber or vinyl plastic handle grip securely cemented to the hand end of the handle forming a closure. Tolerance of plus or minus 0.020 inch on the diameter of the finished handle is permissible.

3.3 Type I, screw type or clip type. Type I mops may be constructed by method A or B, at the option of the manufacturer.

3.3.1 *Type I, screw type (method A).*

3.3.1.1 *Construction.* Screw-type mop handles shall consist essentially of a steel handle with plastic sleeve or wood handle and metal fixtures for holding a wet-cleaning mop between the head and bail of the metal fixtures by tightening a wingnut over a screwpin. (See fig. 1, method A.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:58Z
Check the source to verify that this is the current version before use.

3.3.1.2 *Metal fixtures.* The metal fixtures for holding the mop shall consist essentially of a bail, ferrule, a head, and a screw pin. The length of the fixture, from the top of the ferrule to the base of the bail shall be 10½ ± ⅛ inches.

3.3.1.2.1 *Bail and ferrule.* The bail shall be made of steel wire not less than 0.246 ± 0.01 inch in diameter, and shall be securely fastened to the wood or steel handle by means of a steel ferrule. The ends of the bail shall enter the ferrule for not less than 2¼ inches and abut against the end of the handle, and shall be securely fastened in such a manner that it will not be possible to separate the ends of the bail from the ferrule. The ferrule shall consist of two pieces of cold-rolled steel not less than 0.071 inch in thickness, die-formed to closely fit the bail wire and the handle. The identical halves of the ferrule shall be riveted tightly together at the base of the ferrule with two 5/32-inch-diameter steel rivets ¼ inch long, and riveted tightly to the handle inserted not less than 1⅞ inches with one 3/16-inch-diameter rivet 1⅜ inches long. The inside dimension of the bail shall be 6 7/16 inches ± 1/16 inch provided the bail moves freely in the head without coming out of the lips at the end.

3.3.1.2.2 *Head.* The head shall consist of two identical pieces of die-formed cold-rolled steel of not less than 0.045 inch in thickness. They shall be spotwelded together at not less than six equidistant points. An opening shall be provided in the head to receive the screw pin. There shall be two continuous ears running the length of the bottom of the head to firmly grip the mop and ears at both ends in order to guide the head along the bail. With the head raised to a maximum, there shall be an opening of at least 1½ inches between the base of the bail and bottom of the head to provide for the insertion of the mop.

3.3.1.2.3 *Screw pin.* The screw pin shall be firmly locked in the ferrule and threaded to accommodate a ⅜-inch wingnut provided for the adjustment of the head.

3.3.1.2.4 *Finish.* The bail, ferrule, screw pin, wingnut, and head shall be made corrosive resistant with either zinc plating conforming to type I, class 2 of QQ–Z–325, or cadmium plating conforming to type I, class 2 of QQ–P–416, chromium plating conforming to class 1, type I or II of QQ–C–320, or nickel plating conforming to class 1, type I, II, or III of QQ–N–290.

3.3.2 *Type I, clip type (method B).*

3.3.2.1 *Construction.* Clip-type mop handles shall consist essentially of a steel handle with plastic sleeve or wood handle and metal fixtures for holding a wet-cleaning mop by means of a detachable bail (spring yoke) (see fig. 1, method B).

3.3.2.2 *Metal fixtures.* The metal fixtures for holding the mop shall consist of a bail (spring yoke) and a head. The length of the fixture shall be 4¾ inches ± ¼ inch.

3.3.2.2.1 *Bail (spring yoke).* The bail shall be made of tempered spring-steel wire 0.162 ± 0.015 inch in diameter shaped so as to be firmly attached and removable from the head.

3.3.2.2.2 *Head.* The head shall consist of two identical pieces of die-formed cold-rolled steel of not less than 0.0359 inch in thickness spotwelded together at not less than 6 equidistant points. There shall be two rivets measuring not less than ⅜ inch in length and not less than 3/16 inch in diameter, each corner of the head having one semi-tubular rivet protruding through both pieces of the head, leaving a track not less than 3/16 inch wide in which the bail (spring yoke) can rest. Both protruding rivets must be spun flat and smooth. The butt end of the head shall be flared to form a groove ¼ ± 1/16 inch deep in which the string mop shall remain stationary without being abraded when the bail (spring yoke) is secured. Two metal tabs (hooks) ¾ ± ⅛ inch shall be provided, one on each side of the head 3½ inches ± ⅛ inch up along the handle in which to lock the bail (spring yoke). Metal tabs shall be an extension of the two pieces forming the head.

3.3.2.4 *Handle.* The steel handle as described in 3.2.2 shall be plugged at the lower end with a rubber ball and inserted into the head not less than 3¼ inches and securely anchored by not less than 2 stakes, one at each end of the holding area.

3.3.2.5 *Finish.* The bail (spring yoke) and head shall be made corrosive resistant with either zinc plating conforming to type I, class 2 of QQ–Z–325, cadmium plating conforming

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:58Z
Check the source to verify that this is the current version before use.

to type I, class 2 of QQ–P–416, chromium plating conforming to class 1, type I or II of QQ–C–320, or nickel plating conforming to class 1, type I, II, or III of QQ–N–290.

3.4 Type II, spring-lever type.

3.4.1 *Construction.* Spring-lever mop handles shall consist essentially of a wood handle and metal fixtures for holding a wet-cleaning mop between the head and bail by means of a spring and lever.

3.4.2 *Metal fixtures.* The metal fixtures for holding the mop shall consist essentially of a bail, a head, and a spring and lever.

3.4.2.1 *Bail.* The bail shall be made of steel wire 0.177 ± 0.015 inch in diameter, securely fastened to the lever in an approved manner. The inside dimensions of the bail shall be $6\frac{7}{16}$ inches $\pm\frac{1}{16}$ inch. When the lever is fully raised there shall be an opening of at least $1\frac{1}{4}$ inches between the end of the bail and the head for the insertions of the mop.

3.4.2.2 *Head.* The head shall be made of malleable iron or pressed steel. If pressed steel is used, it shall be not less than 0.0245 inch in thickness when used double thickness and 0.0306 inch in thickness when used single thickness. The head shall be fastened to the handle by driving a 12-gage-steel wire pin through the head until it protrudes on the opposite side. The steel pin shall be approximately $1\frac{1}{4}$ inches long, shall have a rounded head, and shall be peened on the opposite end or the head shall be securely riveted to the handle.

3.4.2.3 *Spring and lever.*

3.4.2.3.1 *Spring.* The spring shall be made of spring-steel wire 0.135 ± 0.008 inch in diameter. It shall be so constructed that sufficient pressure will be produced to maintain the mop in a secure position.

3.4.2.3.2 *Lever.* The lever shall be made of pressed steel. Steel 0.049 ± 0.004 inch in thickness shall be used if the lever is embossed for added strength; steel 0.061 ± 0.004 inch in thickness shall be used if the lever is plain. Where no collar is provided, the lever shall be securely attached to the lower turn of the spring so as not to become detached.

3.4.2.4 *Finish.* The head, including nail, screw or staple, lever, spring, collar, and bail shall be made corrosion resistant with either an electroplated zinc plating conforming to type I, class 2 of QQ–Z–325 or cadmium plating conforming to type I, class 2 of QQ–P–416, chromium plating conforming to class 1, type I or II of QQ–C–320, or nickel plating conforming to class 1, type I, II, or III of QQ–N–290.

3.5 Workmanship. Metal portions of the handles shall be well secured and shall be free from burrs or roughened spots. The wood or steel handles shall be free from defects which affect their appearance or which might impair their serviceability.

4. SAMPLING, INSPECTION, AND TEST PROCEDURES

4.1 Contractor's inspection responsibility. The supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own or any other inspection facilities and services acceptable to the Government. Inspection records of the examination and tests shall be kept complete and available to the Government as specified in the contract or order. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Inspection for acceptance. Except when otherwise specified by civil agencies, inspection shall be in accordance with MIL–STD–105, except where otherwise indicated.

4.2.1 *Inspection of components.*

4.2.1.1 *Visual examination.* Each component or material which cannot be checked after assembly shall be examined in lots or batches, by sampling for compliance with this specification and with applicable specifications and drawings. Any deviation therefrom shall constitute a defect. The acceptable quality level (AQL) shall be 1.5 percent defective.

4.2.1.2 *Dimensional examination.* Each component or material which cannot be measured after assembly shall be examined in lots or batches, by sampling, for compliance with this specification and with applicable specifications and drawings. Any deviation therefrom shall constitute a defect. The acceptable quality level (AQL) shall be 1.5 percent defective.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:58Z
Check the source to verify that this is the current version before use.

4.2.1.3 *Testing of components.* In addition to the quality assurance provisions of the subsidiary specification and drawings, testing shall be performed on each sample unit fixture (all types) for thickness of zinc or cadmium coating, as applicable, on metal fixtures as specified in 3.3.1.2.4, 3.3.2.5, and 3.4.2.4. The sample size shall be as indicated in table I.

TABLE I

Lot size	Sample size
Up to and including 180	2
181 to 500	3
501 to 800	5
801 to 1300	7

4.2.1.4 *End item inspection.*

4.2.1.4.1 *Visual examination.* The defects found during examination shall be classified in accordance with the list shown in table II. The sample unit for this examination shall be one complete mop handle.

4.2.1.4.2 *Acceptable quality levels (AQL's).* The acceptable quality levels expressed in percent defective shall be as follows for the defects listed in table II.

	AQL
Major	1.5
Minor	4.0

TABLE II

Examine	Defect	Classification	
		Major	Minor
Handles	Not hardwood, Southern yellow pine, or Douglas fir		X
	Any decay or brashness (appearing as soft, spongy or punky wood)	X	
	Slope of grain steeper than 1 inch in 15 inches or dip grain more than one-half the diameter		X
	Not close grain		X
	Any knot hole or loose knot	X	
	Crook (warp or bow) more than three-eights of an inch per full length of handle (measure at point of greatest distance from straight line)	X	
	Hole missing in hand end		X
	Any tight or firmly encased knot one-eighth of an inch or more in diameter		X
	Any season check, fracture, shake, or split, open or visibly concealed with filler	X	
	Any wane (bark or lack of wood)	X	
	Pronounced streak or stain obscuring grain of wood		X
	Any wormhole, larva channel, or pocket open or visibly concealed with filler		X
	Loose, raised, or torn grain producing a rough surface along upper two-thirds of handle	X	
	Dimension not as specified	X	
Finish of handles.	Not lacquered, varnished, or other suitable coated hardwood and not vinyl coated Douglas fir and Southern pine	X	
	No plastic sleeve on steel handle	X	
	Dirt or foreign matter imbeded in finish		X
	Wet or tacky, area of no film	X	
	Not smoothly sanded, not rounded at hand end		X
	Out of round (i.e. and any flat area or lack of uniform diameter throughout length)		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:58Z
Check the source to verify that this is the current version before use.

TABLE II—Continued

Examine	Defect	Classification	
		Major	Minor
Finish of handles.	Consecutive machine skip, tool mark, or gouge along upper two-thirds of handle	X	
	Occasional machine skip, tool mark, or gouge along upper two-thirds of handle		X
Handle fixture.	Any part missing, and failure to meet specified type and size	X	
	Not electroplated zinc coating or cadmium plated	X	
	Area of no coating, blistered, evidence of rust	X	
	Dimensions not as specified	X	
	Damaged or malformed, affecting serviceability	X	
	Any sharp burrs or metal sliver that may cause injury	X	
	Welds broken, splatter not removed, burned through, less than specified number of welds	X	
	Any part that will not operate or require abnormal force to operate	X	
	Fixtures do not firmly grip mop	X	
	Locking device does not function properly	X	
	Any component not fabricated of the specified material (unless otherwise indicated)	X	

4.3 Tests

4.3.1 *High-low temperature, plastic.* A plastic-sleeved steel handle or any portion thereof required to make the test shall be subjected to a high-low temperature in a circulating-air cabinet or oven at −40° F, as described in paragraph 4.2(e) of method 6011 of L–P–406.

4.3.2 *Dielectric strength, plastic.* A plastic sleeved steel handle or any portion thereof required to make the test shall be subjected to 6,000 volts for 1 minute in accordance with the test described in paragraph 4.4.1 of method 4031 of L–P–406. Test shall be conducted at room temperature.

4.3.3 *Hardness, plastic.* A plastic sleeved steel handle or any portion thereof required to make the test shall be subjected to the hardness test as described in method 3021 Fed. Test Method Std. No. 601; using the type A Shore Durometer.

4.3.4 *Moisture content of wood.* The moisture content of wood handles shall be determined at a distance of two feet from the end of the handle and shall be measured by an electrical moisture meter, as described in MIL–W–6110.

4.3.5 *Thickness of cadmium or zinc.* The thickness of cadmium or zinc finish imparted to the fixture and component parts shall be determined in accordance with QQ–P–416 and QQ–Z–325 respectively.

4.3.6 *Compliance criteria.* Any handle in the sample for tests failing to conform to the requirements for which tests were made, 4.3, shall be considered defective. If the number of defective handles in the sample exceeds the acceptance number for that sample the entire lot of handles from which the sample was taken shall be considered to have failed to meet the requirements of this specification.

4.4 Examination of preparation for delivery requirements. An examination shall be made to determine that packaging, packing, and marking requirements of section 5 of this specification are complied with. Defects shall be scored in accordance with the list as shown. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be L–4 and AQL shall be 4.0 defects per 100 units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:58Z
Check the source to verify that this is the current version before use.

Examine	Defect
Marking	Omitted; incorrect; illegible; incomplete; of improper size, location, sequence or method of application.
Materials	Any component missing. Any component damaged, affecting serviceability.
Workmanship	Inadequate application of components, such as incomplete closure of case liners, container flaps, loose strapping, inadequate stapling. Bulged or distorted containers.
Weight exterior	Gross weight exceeds requirements.

5. PREPARATION FOR DELIVERY

(Fed. Std. No. 102 shall be referred to for definitions and applications of various levels of packaging and packing protection for supplies and equipment for civil agencies only.)

5.1 Packaging (not applicable).

5.2 Packing.

5.2.1 *Level A.* Thirty-six class 1 handles or twenty-four class 2 handles shall be packed in overseas-type boxes conforming to any of the following specifications:

PPP–B–585, class 3 Wood, wirebound;
PPP–B–591, Wood-cleated Fiberboard;
PPP–B–601, Wood, Cleated-Plywood;
PPP–B–621, Nailed Wood;
PPP–B–636, class 2 Fiber, V3c or V3s, Style OSC;
MIL–B–138, Wood, Fiberboard, Lined for Overseas Shipment;
MIL–B–10377, Wood, Cleated Veneer, Paper Overlaid.

One-half of the heads shall be placed at each end of the box. Both inside ends of the fiber boxes shall be provided with a scored and slotted tray having 3-inch wide flanges all around, constructed of the same material as used in the box. Box closures and strapping shall conform to the box specification or the appendix thereto.

5.2.2 *Level B (military agencies).* Handles shall be packed as specified for level A, except that boxes shall be domestic type. When fiber boxes are used, minimum bursting strength shall be 275 p.s.i.; manufacturer's joint shall be stitched; all flaps of the fiber box shall be securely sealed with a good quality adhesive applied throughout the entire area of contact between the flaps; 3 flat steel straps not less than 3/8 inch by 0.015 inch thickness shall be applied around the top, sides, and bottom of each box. One strap shall be positioned approximately 6 inches from each end; the third strap centered equidistant from the end straps.

5.2.2.1 *Level B (civil agencies).* Thirty-six type I or type II, class 1 handles of a single size; or twenty-four type I or type II, class 2 handles of a single size shall be packed in fiberboard boxes conforming to type I or type II, class 1, styles OSC, OPF, or FTC of PPP–B–636, constructed of board testing not less than 275 p.s.i. Alternate layers of handles shall be reversed to position one-half of the heads at each end of the box. Scored- and slotted-formed separators shall be used between each layer to maintain handles in position and prevent shifting during shipment and handling. Style OSC and OPF boxes shall be provided with inside end liners of not less than 200 p.s.i. test board, full inside depth of box, full inside width of box, and extending on each side wall for a distance of not less than eight inches. Box closure shall conform to requirements specified in the appendix to the box specification, or by use of reinforced, gummed paper tape conforming to PPP–T–45, or reinforced, pressure-sensitive, adhesive tape conforming to PPP–T–97 applied in accordance with the appendix to the applicable tape specification.

5.2.3 *Level C.* Thirty-six handles of class 1 or 24 handles of class 2 shall be packed in containers of the type, size, and kind commonly used for the purpose, in a manner that will insure acceptance by common carrier and safe delivery at destination. Shipping containers shall comply with carrier rules and regulations applicable to the mode of transportation.

5.3 Marking.

5.3.1 *Civil agencies.* In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with Fed. Std. No. 123.

5.3.2 *Military agencies.* In addition to any special marking required by the contract or

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:58Z
Check the source to verify that this is the current version before use.

order, shipping containers shall be marked in accordance with MIL–STD–129.

6. NOTES

6.1 Ordering data. Purchasers should exercise any desired options offered herein and procurement documents should specify the following:

(*a*) Type and class (see 1.2.1).
(*b*) Size (see 1.2.2).
(*c*) Sampling for inspection and tests (see 4.2).
(*d*) Whether mop handles shall be packed for level A, level B (Civil or Military), or level C (see 5.2).
(*e*) Marking (see 5.3).

6.2 The Standard Pack requirements in paragraph 5.2.2.1 are intended for use in procurement of Stores Stock replenishments. Procuring officers should use the Standard Pack requirements when it is known that the material will be shipped from a supplier to a domestic warehouse, supply depot, or intermediate holding point for temporary storage, subsequent issue and/or shipment to eventual user.

6.3 Transportation description. Transportation descriptions and minimum weights applicable to this commodity are:

Handles and holders combined, Mop.
Carload minimum weight 24,000 pounds subject to Rule 34, Uniform Freight Classification.
Motor volume weight 24,000 pounds.

Notice.—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

MILITARY INTEREST:
Army—Q
Navy—S
Air Force

Copies of this specification may be purchased for cents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:58Z
Check the source to verify that this is the current version before use.