[INCH-POUND]
OO-H-2899
July 2, 1997
SUPERSEDING
MIL-H-28604B(YD)
30 January 1989

FEDERAL SPECIFICATION

# HOOK, DRAWBAR, LOGGING

The General Services Administration has authorized the use of this specification by all Federal agencies.

## 1. SCOPE

1.1 Scope. This specification covers a five-way, drawbar hook of a one piece, cast steel construction for use with multiple wire ropes and ferrules. The hooks covered by this specification shall be of one type (see figure 1).

## 2. APPLICABLE DOCUMENTS

2.1 Other publications. The following document forms a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposals shall apply.

AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)

ANSI - Z1.4 - Sampling Procedures for Tables for Inspection by Attributes.

(Private sector and civil agencies may purchase copies of this voluntary standard from the American National Standards Institute, Inc., 11 West 42nd Street, New York, NY 10036.)

(DoD activities may obtain copies of this adopted voluntary standard listed in the DoD index of Specifications and Standards free of charge from Defense Automated Printing Services, Attn: DoDSSP, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data which may improve this document should be sent to: Commanding Officer (Code 15E2), Naval Construction Battalion Center, 1000 23rd Avenue, Port Hueneme, CA 93043-4301, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 3695

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:02Z
Check the source to verify that this is the current version before use.

2.2 Order of precedence. In the event of a conflict between the text of this document and the reference cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

## 3. REQUIREMENTS

3.1 Description. The drawbar hook shall have a shape as shown in figure 1, and have five openings each capable of receiving a 1.0-inch (25.40 millimetre (mm)) wire rope with a ferrule. Mounting facilities for the drawbar shall be a through bore of not less than 1.88 inches (47.75 mm) diameter, by not less than 2.38 inches (60.45 mm) deep, with the vertical center line of the bore perpendicular and in alignment with the longitudinal center line of the middle opening. All surfaces over which the wire ropes will lay shall be smooth, curved, and rounded to prevent damage to the ropes.

3.2 Standard commercial product. The drawbar hook shall, as a minimum, be in accordance with the requirements of this specification and shall be the manufacturer's standard commercial product. Additional or better features which are not specifically prohibited by this specification but which are a part of the manufacturer's standard commercial product, shall be included in the drawbar hook being furnished. A standard commercial product is a product which has been sold or is being currently offered for sale on the commercial market through advertisements or manufacturer's catalogs, or brochures, and represents the latest production model.

3.3 First article. When specified (see 6.2), a sample shall be subjected to first article inspection in accordance with 4.2.1 and 6.2.

3.4 Materials. Materials used shall be free from defects which would adversely affect the performance or maintainability of individual components or of the overall assembly. Materials not specified herein shall be of the same quality used for the intended purpose in commercial practice. Unless otherwise specified herein, all equipment, material, and articles incorporated in the work covered by this specification are to be new and fabricated using materials produced from recovered materials to the maximum extent possible without jeopardizing the intended use. The term "recovered materials" means materials which have been collected or recovered from solid waste and reprocessed to become a source of raw materials, as opposed to virgin raw materials. Unless otherwise specified, none of the above shall be interpreted to mean that the use of used or rebuilt products are allowed under this specification.

3.5 Weight. The weight of the hook shall be not greater than 60 pounds (27.22 kilograms (kg)).

3.6 Identification marking. The hooks shall be permanently and legibly marked with the manufacturer's name or trademark. When specified (see 6.2), marking of the hook shall include the National Stock Number (NSN).



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:02Z
Check the source to verify that this is the current version before use.

3.7 Performance.

3.7.1 Proof load. The hook shall be capable of withstanding a proof load of 147,000 pounds (66 678.08 kg) without damage, permanent deformation, cracks, or distortion.

3.8 Workmanship. Hooks shall be cast of medium carbon chromium-manganese-molybdenum (Cr-Mn-Mo) steel comparable to AISI 4130. Castings shall be sound and free from patching, misplaced coring, warping, or any other defect which reduces the casting's ability to perform its intended function.

## 4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements (examinations and test) as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification, where such inspections are deemed necessary to ensure that supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of section 3. The inspection set forth in this document shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the document shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.1.2 Component and material inspection. Components and materials shall be inspected in accordance with all the requirements specified herein and in the applicable referenced document.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.2.1).
b. Quality conformance inspection (see 4.2.2).

4.2.1 First article inspection. The first article inspection shall be performed on one drawbar hook when a first article is required (see 3.3 and 6.2). This inspection shall include the examination of 4.4 and the test of 4.5. The first article may be either a first production item or a standard production item from the supplier's current inventory provided the item meets the



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:02Z
Check the source to verify that this is the current version before use.

requirements of the specification and is representative of the design, construction, and manufacturing technique applicable to the remaining items to be furnished under the contract.

4.2.2 Quality conformance inspection. The quality conformance inspection shall include the examination of 4.4 and the test of 4.5. This inspection shall be performed on the samples selected in accordance with 4.3.

4.3 Sampling. Sampling and inspection procedures shall be in accordance with ANSI - Z1.4. All drawbar hooks offered for delivery at one time shall be considered a lot for the purpose of inspection.

4.4 Examination. Each hook shall be examined for defects listed in table I. Each attribute within each classification of multiple defects shall constitute one defect.

TABLE I. Classification of defects.

| Classification | Defects | Requirement paragraph |
|---|---|---|
| Critical | None defined. | |
| Major | | |
| 101 | Not shaped in accordance with figure 1. | 3.1 |
| 102 | Capacity of openings not as required. | 3.1 |
| 103 | Dimensions, perpendicularity, and alignment of mounting hole not as required. | 3.1 |
| 104 | Material not as specified. | 3.4 |
| Minor | | |
| 201 | Marking of manufacturer's name or trademark missing or illegible. | 3.6 |
| 202 | Workmanship not of quality specified. | 3.8 |

4.5 Proof test. Sample hooks selected in accordance with 4.3 shall be subjected to a proof load as specified in 3.7. Attach the hook to the wire rope chokers, and position the ferrules to ensure locking in the hook. Allow load to remain on the hook and chokers for not less than one minute, then release the load tension and unlock the hook from the ferrules without the use of any tools. Examine the hook for cracks and breaks in the casting and for deformation. Inability of the hook to unlock readily from the ferrules, or evidence of cracking, breaking, or deformation of the hook shall constitute failure of this test.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:02Z
Check the source to verify that this is the current version before use.

## 5. PACKAGING

5.1 Packaging requirements. The preservation, packing, and marking shall be as specified in the contract or order.

## 6. NOTES

(This section contains information of a general or explanatory nature which is helpful, but is not mandatory.)

6.1 Intended use. Drawbar hooks are intended for use with ferrules-ended multiple chokers in logging operations, such as the simultaneous towing and skidding of five logs.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.
b. When first article and inspection sample is required (see 3.3 and 4.2.1).
c. When identification marking is to include the NSN (see 3.6).

6.3 First article. When a first article inspection is required, the item will be tested and should be a first production item or it may be a standard production item from the contractor's current inventory as specified in 4.2.1. The first article should consist of one unit. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examination, test, and approval of first article.

6.4 Supersession data. This specification replaces military specification MIL-H-28604B(YD) dated 30 January 1989.

6.5 Subject term (key word) listing.

Drawbar hook
Five-way
Logging

6.6 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:02Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodians:
Army - AT
Navy - YD1
Air Force - 99

Review Activities:
Air Force - 84
DLA - GS

CIVIL AGENCY COORDINATING ACTIVITIES:

GSA-FSS
DOI - BLM
DOA - APS

PREPARING ACTIVITY:
Navy - YD1

(Project 3695-0102)



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:02Z
Check the source to verify that this is the current version before use.

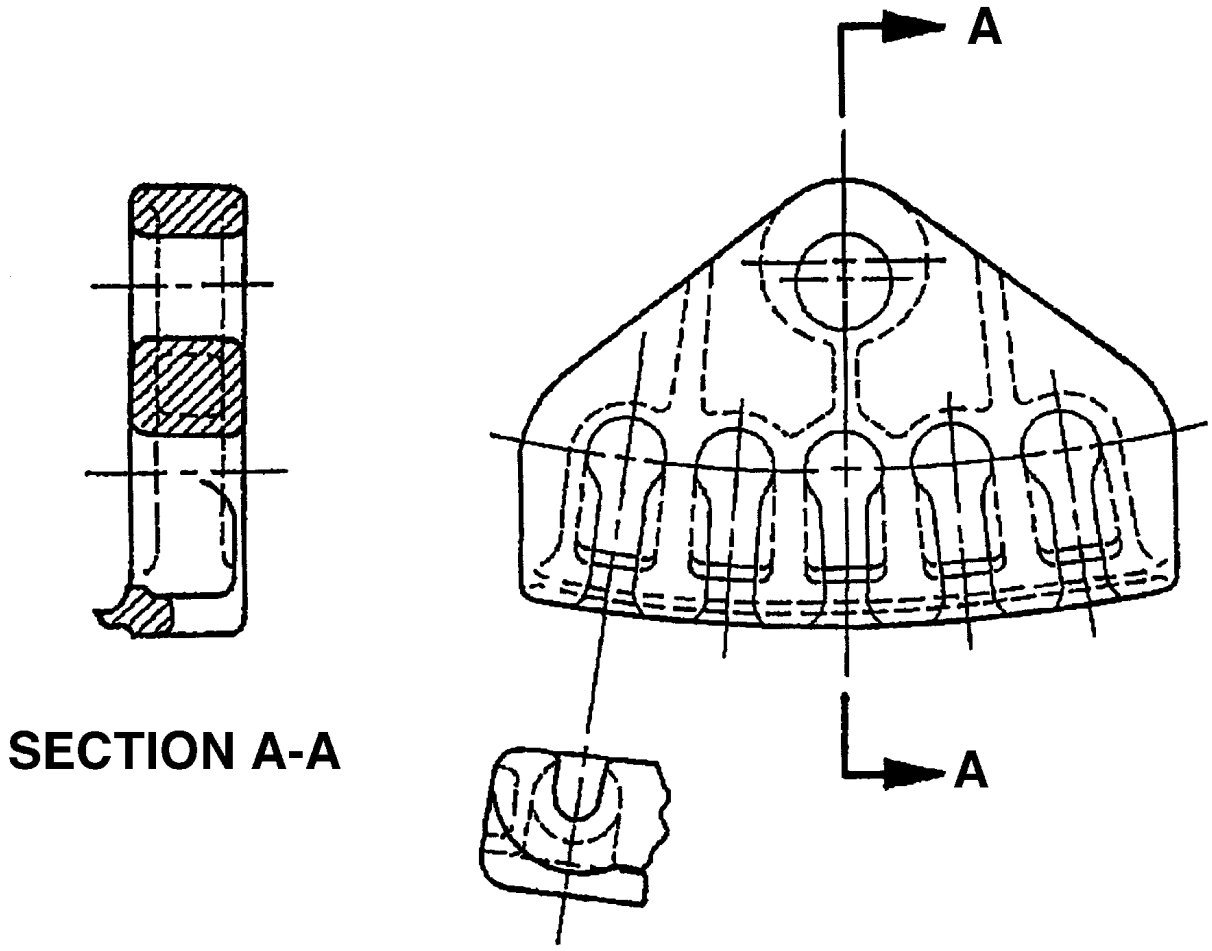


FIGURE 1. Drawbar hook.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:02Z
Check the source to verify that this is the current version before use.