MIL-F-63434A (AR)
30 AUGUST 1982
SUPERSEDING
MIL-F-63434 (AR)
13 May 1981

MILITARY SPECIFICATION

FUZE PROBE ASSEMBLY, SPRING, ASSEMBLING AND PACKING (TOW)

This specification is approved for use by the U.S. Army Armament Research and Development Command and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification contains requirements not covered by the drawings and provides quality assurance provisions for fabrication of parts, assembly and packing of one type of fuze probe for use in the Improved TOW Missile.

2. APPLICABLE DOCUMENTS

2.1 Issues of Documents. The following documents of the issue in effect on date of invitation for bids or request for proposals, form a part of this specification to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-A-48078	Ammunition, Standard Quality Assurance Provisions for

STANDARDS

MILITARY

MIL-STD-105	Sampling Procedure and Tables for Inspection by Attributes

FSC 1336

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, US Army Armament Research and Development Command, Attn. DRDAR-QA, Dover, New Jersey 07801 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

DRAWINGS (See 6.5)

U. S. Army Armament Research and Development Command

11785860 I TOW Fuze Probe Assembly

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the Contracting Officer.)

3. REQUIREMENTS

3.1 Materials. Materials shall be in accordance with the applicable drawings and specifications.

3.2 Components and assemblies. The components and assemblies shall comply with all the requirements specified on Drawing 11785860 and associated drawings and with all requirements specified in applicable specifications and standards.

3.3 Item Definition. The Fuze Probe shall be an extendable device for increasing warhead standoff. A crush switch shall be provided at the forward tip of the probe and at the ogive immediately forward of the explosive charges. The Probe shall be mechanically locked in the stowed position prior to launch and in the extended position after deployment. The Fuze Probe extending mechanism shall be self contained and shall be actuated by a bore rider assembly at missile launch.

3.4 Missile Flight Vibration. The Fuze Probe shall be subjected to the Missile Flight Vibration Test.

3.5 Missile Launch Shock. The Fuze Probe shall be subjected to the Missile Launch Shock Test.

3.6 Transportation Vibration. The Fuze Probe shall be subjected to the Transportation Vibration Test

3.7 Electrical Resistance.

* 3.7.1 Electrical resistance of black wire to outer ogive base shall not exceed 0.5 Ohm.

* 3.7.2 Electrical resistance of black wire to outer probe tip shall not exceed 0.5 Ohm.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

* 3.7.3 Electrical resistance of brown wire to inner probe tip shall not exceed 0.5 Ohm.

* 3.7.4 Electrical resistance of brown wire to inner ogive shall not exceed 0.5 Ohm. Electrical resistance between the brown and black wires shall be 100 megohms minimum at 100 ± 5 Vdc.

3.8 Electrical Capacitance. The capacitance as measured between the brown and black wires of the Fuze Probe shall be 75 Picofarads (Pf) ± 15 Pf.

3.9 Hot Deployment. The Probe Assembly shall be tested for hot deployment. The time from bore rider release to probe fully extended shall not exceed 0.100 seconds and the forward tip of the extended probe with a 4.25 plus or minus a .25 pound load applied axially to the tube sections shall be 14.14 inches minimum from the assembly base. The bore rider shall return to the retracted position after deployment.

3.10 Cold Deployment. The Probe Assembly shall be tested for cold deployment. The time from bore rider release to probe fully extended and locked shall not exceed 0.100 seconds and the forward tip of the extended probe with a 4.25 plus or minus .25 pound load applied axially to the tube sections shall be 14.14 inches minimum from the assembly base. The bore rider shall return to the retracted position after deployment. The probe angle change, when the load direction is reversed, shall not exceed one degree total.

3.11 Ambient Deployment. The Probe Assembly shall be tested for ambient deployment. The time from bore rider release to probe fully extended and locked shall not exceed 0.100 seconds and the forward tip of the fully extended probe with a 4.25 plus or minus .25 pound load applied axially to the tube sections shall be 14.14 inches minimum from the assembly base. The bore rider shall return to the retracted position after deployment.

3.12 Angular Alignment. The angle formed between a point tangent to the probe at 1.5 probe diameters aft of the probe tip and the warhead centerline shall not exceed 1 degree total included angle when loaded to 18 pounds.

3.13 First Article Inspection. This specification makes provision for First Article Inspection. Requirements for the submission of First Article samples by the contractor shall be as specifed in the contract.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

3.14 Workmanship. The TOW, Fuze Probe Assembly and its components shall be fabricated and finished in a thorough, workmanlike manner. It shall be free of burrs, chips, sharp edges, unblended radii, cracks, surface defects, dirt, grease, rust, corrosion products and other foreign matter. The cleaning methods used shall not be injurious to any part, nor shall parts be contaminated by the cleaning agents. Exterior surface coatings shall be continuous except for a few light scratches. All required markings shall be neat and sharply defined.

3.15 Weight. The weight of the complete probe assembly shall not exceed 1.53 pounds.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspections & standard quality assurance program. Unless otherwise specified herein or in the contract, the provions of MIL-A-48078 shall apply and are hereby made a part of this detailed specification.

4.2 Classification of inspection. In conformance with MIL-A-48078, the following types of inspection shall be conducted on this item:

a. First Article Inspection

b. Quality Conformance Inspection

4.3 First article inspection.

4.3.1 Submission. The contractor shall submit a First Article sample as designated by the Contracting Officer. The First Article sample shall consist of 36 Fuze Probe Assemblies and 10 each of every component and every subassembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

4.3.2 Inspection to be performed. See MIL-A-48078 and Table I specified herein.

4.3.3 Rejection. See MIL-A-48078.

TABLE I

FIRST ARTICLE ACCEPTANCE SCHEDULE

Sample Nos.	Transportation Vibration	Launch Shock	Deployment	Missile Flight Vibration	Angular Alignment	Electrical Tests
1-2			X		X	X
3-10			X			X
11-12			C		X	X
13-20			C			X
21-22			H		X	X
23-30			H			X
31-32	X	X	X	X	X	X
33-36	X	X	X	X		X

ABBREVIATIONS: X = Test at Ambient Temperature
C = Test at Cold Temperature (-25°F)
H = Test at Hot Temperature(+140°F)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

4.4 Quality conformance inspection. Inspection lots shall comply with the lot formation provision of MIL-A-48078.

4.4.1 Inspection Lot Formation. Inspection lots shall comply with the lot formation provision of MIL-A-48078.

4.4.2 Examination. See MIL-A-48078.

Sampling plans. Unless otherwise specified in the Classification of Defects and Test Tables, sampling plans and procedures for major and minor defects shall be in accordance with MIL-STD-105, Inspection Level II.

Lot acceptance. Testing to be done in accordance with Table II on a quantity of thirty-six as specified in Paragraph 3.4 thru 3.12 inclusive. The quantity of thirty-six is valid for lot sizes of up to 5000 units.

TABLE II

LOT ACCEPTANCE SCHEDULE

Sample Nos.	Transportation Vibration	Deployment	Missile Flight Vibration	Angular Alignment	Electrical Tests
1-2	X	X		X	X
3-6	X	X			X
7-8		C		X	X
9-18		C			X
19-20		H		X	X
21-30		H			X
31-32		X	X	X	X
33-36		X	X		X

Abbreviations: X = Test at Ambient Temperature
C = Test at Cold Temperature(-25°F)
H = Test at Hot Temperature (+140°F)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63434A (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.1	1 TOW Fuze Probe Assembly				11785860
					NEXT HIGHER ASSEMBLY 9334064
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR					
101	Loose, missing, damaged or parts not installed properly		100%		Visual
102	Weight		1.0		Gage
103	Self-locking nut No. MS 21044C04 back-off torque improper		1.0		Gage
104	Minimum length improper		1.0		Gage
MINOR					
201	Thread locking compound missing		4.0		Visual
202	Marking missing or illegible		4.0		Visual
203	Evidence of poor workmanship		1.0		Visual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63434A (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.2	Mechanism Staking Assembly	1 OF 1	11785861
			NEXT HIGHER ASSEMBLY 11785863

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR					
101	Stake shall support 1.0 pounds unseating force without separation		1.0		Gage
102	Device should trigger when a 4.0 pounds min. force is applied to lock pin in direction shown and lever is in cocked position		100%		Gage
103	3 inch-pounds torque to be applied without relative motion between bushing and shaft		1.0		Gage
104	Lubricant missing		1.0		Visual
MINOR					
201	Evidence of poor workmanship		1.0		Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63434A (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.3	Plate Staking Assembly	1 OF 1	11785862
			NEXT HIGHER ASSEMBLY 11785861

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR					
101	Stake shall support 1.0 pound unseating force without separation		1.0		Gage
102	Stake shall withstand 1.0 inch-pounds torque without turning		1.0		Gage
103	Failure to seat properly		1.0		Visual
MINOR					
201	Evidence of poor workmanship		1.0		Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63434A (AR)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.4	Frame Riveting Assembly		11785863
			NEXT HIGHER ASSEMBLY 11785860

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR					
101	Rivet Missing		1.0		Visual
MINOR					
201	Evidence of poor workmanship		1.0		Visual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63434A (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.5.1	Locking Lever Assembly	1 OF 1	11785864
			NEXT HIGHER ASSEMBLY 11785861

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR					
101	Roller should be free to turn		1.0		Visual
102	Stake		1.0		Visual
MINOR					
201	Evidence of poor workmanship		1.0		Visual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63434A (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.5.2	Lever Staking Assembly	1 OF 1	11785865
			NEXT HIGHER ASSEMBLY 11785864

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR					
101	Staked pin shall withstand a minimum 2 pound force without unseating		1.0		Gage
102	Staked pin shall withstand a minimum 16 pound force without unseating		1.0		Gage
MINOR					
201	Evidence of poor workmanship		1.0		Visual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63434A (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.6	Cam Assembly	1 OF 1	11785866
			NEXT HIGHER ASSEMBLY 11785861

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR					
101	Shaft shall withstand a torque of 3.0 inch-pounds minimum without relative motion between cam and shaft		1.0		Gage
102	Pin shall withstand a push out force of 1.0 pounds without motion.		1.0		Gage
MINOR					
201	Evidence of poor workmanship		1.0		Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63434A (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.7	Lever Assembly	1 OF 1	11785867
			NEXT HIGHER ASSEMBLY 11785861

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR					
101	Assembly of shaft and lever must resist a pushout force of 1 pound minimum		1.0		Gage
MINOR					
201	Evidence of poor workmanship		1.0		Visual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63434A (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.8	Ogive Assembly	1 OF 1	11785868
			NEXT HIGHER ASSEMBLY: 11785860

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR					
101	Rivet flush		1.0		Gage
102	Missing Insulators		100%		Visual
MINOR					
201	Evidence of poor workmanship		1.0		Visual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63434A (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.9	Tube Assembly	1 OF 1	1785869
			NEXT HIGHER ASSEMBLY 11785860

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR					
101	Parts not mated properly		1.0		Visual
102	Threaded ring backoff torque improper		1.0		Gage
MINOR					
201	Evidence of poor workmanship		1.0		Visual

NOTE:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63434A (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.10	Crush switch assembly				11785870
					NEXT HIGHER ASSEMBLY
					11785869
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR					
101	Parts not properly mated		1.0		Visual
102	Buttsplice to black conductor - no insulation under crimp		1.0		Visual
MINOR					
201	Evidence of poor workmanship		1.0		Visual

REMARKS

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.11	Slice, Butt Non-insulated	1 OF 1	11785871
			NEXT HIGHER ASSEMBLY: 11785870

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR					
101	Dimensions improper		1.0		Gage
MINOR					
201	Evidence of poor workmanship		1.0		Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63434A (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.12	Inner Cone Assembly	1 OF 1	11785873
			NEXT HIGHER ASSEMBLY 11785860

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
*MAJOR					
101	Each rivet shall withstand unseating force of 0.5 pounds without failure		1.0		Gage
102	Missing or incomplete insulator		1.0		Visual
MINOR					
201	Flow form for attachment, (4) posts		4.0		Visual
202	Evidence of poor workmanship		1.0		Visual

NOTES:

DSCR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63434A (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 11785875
4.4.2.13	Tube, Inner				NEXT HIGHER ASSEMBLY 11785869
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR					
101	Wedge groove O. D.		1.0		Gage
102	Lock Pin Hole Diameter		1.0		Gage
103	Tube O. D.		1.0		Gage
104	Lock Pin Hole Distance from Tube End		1.0		Gage
105	C' Sink missing or incorrect		1.0		Visual
MINOR					
201	Tube I. D.		4.0		Gage
202	Overall Length		4.0		Gage
203	Protective finish missing or inadequate		4.0		Visual
204	Evidence of poor workmanship		1.0		Visual
*					

NOTE:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63434A (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.14	Tube, Outer	1 of 1	11785876
			NEXT HIGHER ASSEMBLY: 111785869

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR					
101	Wedge Groove Diameter		1.0		Gage
102	Diameter of Lock Pin Hole		1.0		Gage
103	Location of Lock Pin Hole		1.0		Gage
104	Countersink Missing or Incorrect		1.0		Visual
105	Thread size		1.0		Gage
MINOR					
201	Tube I.D.		4.0		Gage
202	Slot width		4.0		Gage
203	Overall Length		4.0		Gage
204	Protective Finish Missing or Inadequate		4.0		Visual
205	Evidence of poor workmanship		1.0		Visual
206	Tube O.D.		1.0		Gage

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63434A (AR)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.15	Lever, Locking		11785877
			NEXT HIGHER ASSEMBLY
			11785865

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None Defined				
MAJOR					
101	Location of Lock Pin Hole		1.0		Gage
102	Diameter of Lock Pin Hole		1.0		Gage
103	Location of Roller Mounting Holes		1.0		Gage
104	Diameter of Roller Holes		1.0		Gage
105	Diameter of Stop Lever Mounting Holes		1.00		Gage
MINOR					
201	Overall Width		4.0		Gage
202	Evidence of poor workmanship		1.0		Visual
203	Protective finish inadequate		4.0		Visual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63434A (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.16	Lever, Bore Rider	1 of 1	11785878
			NEXT HIGHER ASSEMBLY 11785867

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None Defined				
MAJOR					
101	Diameter of Shaft Hole		1.0		Gage
MINOR					
201	Curvature of surface mating with cam		4.0		Gage
202	Protective finish missing or inadequate		4.0		Visual
203	Evidence of poor workmanship		1.0		Visual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63434A (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 11785879 / NEXT HIGHER ASSEMBLY 11785866
4.4.2.17	Shaft, Shouldered, Cam				
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None Defined				
MAJOR					
101	Large diameter over knurl		1.0		Gage
102	Small diameter over knurl		1.0		Gage
103	Two identical diameters		1.0		Gage
MINOR					
201	Overall Length		4.0		Gage
202	Concentricity of small diamters with datum A		4.0		Gage
203	Protective finish missing or inadequate		4.0		Visual
204	Evidence of poor workmanship		1.0		Visual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63434A (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.18	Cam	1 of 1	11785880
			NEXT HIGHER ASSEMBLY 11785866

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR					
101	Curvature of working surface		1.0		Gage
102	Curvature of surface mating with Bore Rider Lever		1.0		Gage
MINOR					
201	Diameter of shaft hole		4.0		Gage
202	Finish of working surface		4.0		Gage
203	Diameter of small hole		4.0		Gage
204	Location of small hole		4.0		Gage
205	Protective finish missing or inadequate		4.0		Visual
206	Evidence of poor workmanship		1.0		Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63434A (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.19	Bushing, Hex	1 OF 1	11785881
			NEXT HIGHER ASSEMBLY
			11895961

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None Defined				
MAJOR					
101	Diameter of large hole		1.0		Gage
MINOR					
201	Length of Sleeve		4.0		Gage
202	Spring hole missing		4.0		Visual
203	Protective finish missing or inadequate		4.0		Visual
204	Evidence of poor workmanship		1.0		Visual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63434A (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.20	Screw, Retaining	1 OF 1	11785882
			NEXT HIGHER ASSEMBLY 11785861

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None Defined				
MAJOR					
201	Thread size		1.0		Gage
MINOR					
201	Length of threads		4.0		Gage
202	Protective finish missing or inadequate		4.0		Visual
203	Slot Missing		4.0		Visual
204	Evidence of poor workmanship		1.0		Visual

NOTES:

DLADAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: http://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.21	Spacer, Square, Plate	1 OF 1	11785883
			NEXT HIGHER ASSEMBLY: 11785862

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None Defined				
MAJOR					
101	Thread size		1.0		Gage
102	Location of threaded hole		1.0		Gage
103	Tapers		1.0		Gage
MINOR					
201	Length between shoulders		4.0		Gage
202	Protective finish missing or inadequate		4.0		Visual
203	Evidence of poor workmanship		1.0		Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63434A (AR)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.22	Spacer, Round, Plate		11785884
			NEXT HIGHER ASSEMBLY 11785862

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None Defined				
MAJOR					
101	Tapers		1.0		Gage
MINOR					
201	Length between shoulders		4.0		Gage
202	Protective finish missing or inadequate		4.0		Visual
203	Evidence of poor workmanship		1.0		Visual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63434A (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.23	Roller, Cam	1 OF 1	11785885
			NEXT HIGHER ASSEMBLY 11785866

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None Defined				
MAJOR	None Defined				
MINOR					
201	O.D.		4.0		Gage
202	I.D.		4.0		Gage
203	Protective finish missing or inadequate		4.0		Visual
204	Evidence of poor workmanship		1.0		Visual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63434A (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.24	Shaft, Shouldered, Borerider	1 of 1	11785886
			NEXT HIGHER ASSEMBLY: 11785867

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None Defined				
MAJOR					
101	Diameter over knurl		1.0		Gage
MINOR					
201	Concentricity of O.D. with two diameters		4.0		Gage
202	Diameter of ends		4.0		Gage
203	Protective finish missing or inadequate		4.0		Visual
204	Evidence of poor workmanship		1.0		Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63434A (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.25	Shaft, Straight, Roller, Cam	1 OF 1	11785887
			NEXT HIGHER ASSEMBLY: 11785866

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None Defined				
MAJOR					
101	O.D. of smooth area		1.0		Gage
102	Diameter over knurl, min.		1.0		Gage
MINOR					
201	Protective finish missing or inadequate		4.0		Visual
202	Evidence of poor workmanship		1.0		Visual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63434A (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.26	Cone, Inner	1 OF 1	11785888
			NEXT HIGHER ASSEMBLY: 11785873

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None Defined				
MAJOR					
101	Location of 1 small hole and 3 square holes		1.0		Gage
102	Large O.D. of flange		1.0		Gage
103	Overall height		1.0		Gage
104	Location of 4 holes		1.0		Gage
MINOR					
201	Protective finish missing or inadequate		4.0		Visual
202	Evidence of poor workmanship		1.0		Visual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63434A (AR)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.27	Plate		11785889-1, -2
			NEXT HIGHER ASSEMBLY
			11785862 ~~11785861~~

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None Defined				
MAJOR					
101	Diameter of square spacer plate holes		1.0		Gage
102	Diameter of round spacer plate holes		1.0		Gage
103	Location of holes		1.0		Gage
MINOR					
201	Diameter of Lock Lever shaft holes		4.0		Gage
202	Diameter of Cam Shaft holes		4.0		Gage
203	Diameter of anchor strap mounting hole		4.0		Gage
204	Diameter of bore rider shaft holes		4.0		Gage
205	Flatness		4.0		Gage
206	Protective finish missing or inadequate		4.0		Visual
207	Evidence of poor workmanship		1.0		Visual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63434A (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.28	Borerider	1 of 1	11785890
			NEXT HIGHER ASSEMBLY 11785921

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None Defined				
MAJOR					
101	Contour		1.0		Gage
MINOR					
201	Location of holes		4.0		Gage
202	C'Sink missing or incorrect		4.0		Visual
203	Protective finish missing or inadequate		4.0		Visual
204	Evidence of poor workmanship		1.0		Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63434A (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.29	Spring, Torsion, Borerider	1 OF 1	11785891
			NEXT HIGHER ASSEMBLY: 11785861

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None Defined				
MAJOR					
101	Torque		1.0		Gage
MINOR					
201	Length of ends		4.0		Gage
202	Diameter of wire		4.0		Gage
203	Protective finish missing or inadequate		4.0		Visual
204	Evidence of poor workmanship		1.0		Visual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63434A (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.30	Spring, Torsion, Cam	1 of 1	11785892
			NEXT HIGHER ASSEMBLY: 11785861

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None Defined				
MAJOR					
101	Torque		1.0		Gage
MINOR					
201	Length of ends		4.0		Gage
202	Number of coils		4.0		Visual
203	Protective finish missing or improper		4.0		Visual
204	Evidence of poor workmanship		1.0		Visual

NOTES:

DROAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63434A (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.32	Ogive	1 OF 2	11785894
			NEXT HIGHER ASSEMBLY 11785868

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None Defined				
MAJOR					
101	Inside diameter		1.0		Gage
102	True position of forward hole		1.0		Gage
103	Contour of Zone D		1.0		Gage
104	True position of rivnut holes		1.0		Gage
105	Diameter of rivnut holes		1.0		Gage
106	True position of elongated slot		1.0		Gage
107	True position of six holes		1.0		Gage
108	Radius or chamfer improper on slot edges and corners		1.0		Gage
☆					

NOTE:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63434A (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.32	Ogive	2 OF 2	11785894
			NEXT HIGHER ASSEMBLY 11785868

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
MINOR					
201	Wall thickness	4.0		Gage	
202	True position of cutout	4.0		Gage	
203	Width of cutout	4.0		Gage	
204	Countersinks missing	4.0		Visual	
205	Protective finish missing or inadequate	4.0		Visual	
206	Evidence of poor workmanship	1.0		Visual	
*					

NOTES

DAIR-81 Form 160 Jul 77

Source: https://assist.dla.mil - Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63434A (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.33	Cone, Nose	1 OF 1	11785895
			NEXT HIGHER ASSEMBLY: 11785870

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None Defined				
MAJOR					
101	Contour		1.0		Gage
102	Wall thickness on spherical surface		1.0		Gage
MINOR					
201	Inside groove missing		4.0		Visual
202	Indentation missing		4.0		Visual
203	Protective finish missing or inadequate		4.0		Visual
204	Evidence of poor workmanship		1.0		Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63434A (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.34	Pin, Lock	1 OF 1	11785896
			NEXT HIGHER ASSEMBLY: 11785865

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None Defined				
MAJOR					
101	Overall Length of Pin		1.0		Gage
102	Hardness of Pin		1.0		Hardness Tester
103	Small Diameter		1.0		Gage
MINOR					
201	Evidence of poor workmanship		1.0		Visual
202	Protective finish missing or inadequate		4.0		Visual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63434A (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.35	Cone, Nose, Inner				11785897
					NEXT HIGHER ASSEMBLY 11785870
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None Defined				
MAJOR					
101	I.D.		1.0		Gage
102	Overall height		1.0		Gage
103	Outer radius		1.0		Gage
MINOR					
201	Thickness		4.0		Gage
202	Location of small hole		4.0		Gage
203	Protective finish missing or inadequate		4.0		Visual
204	Evidence of poor workmanship		1.0		Visual

NOTE:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63434A (AR)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.36	Insulator		11785898
			NEXT HIGHER ASSEMBLY 11785870

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None Defined				
MAJOR					
101	Thread size		1.0		Gage
102	Location of small hole		1.0		Gage
103	Distance from second shoulder to forward end		1.0		Gage
MINOR					
201	Evidence of poor workmanship		1.0		Visual

NOTE:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.37	Frame	1 of 1	11785899
			NEXT HIGHER ASSEMBLY 11785863

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None Defined				
MAJOR					
101	Large O.D.		1.0		Gage
102	Small I.D.		1.0		Gage
103	Perpendicularity of small I.D. to Datum B		1.0		Gage
104	Flat boss to outside surface hole missing		1.0		Visual
105	True position of square hole		1.0		Gage
106	True position of six holes		1.0		Gage
107	Radius or chamfer improper on rectangle hole edges and corners		1.0		Gage
MINOR					
201	Smoothness of square hole edges		4.0		Visual
202	Slot width		4.0		Gage
203	Slot length		4.0		Gage
204	Notch width		4.0		Gage
205	Notch length		4.0		Gage
206	Location of elongated holes		4.0		Gage
207	Evidence of poor workmanship		1.0		Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63434A (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.38	Ring, Split	1 of 1	11785900
			NEXT HIGHER ASSEMBLY 11785869

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None Defined		4.0		Gage
MAJOR	None Defined				
MINOR					
201	Thickness		4.0		Gage
202	Protective finish missing or inadequate		4.0		Visual
203	Free Diameter		1.0		Gage
204	Evidence of poor workmanship		1.0		Gage

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63434A (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.39	Ring, Wedge, Inner	1 of 1	11785901
			NEXT HIGHER ASSEMBLY 11785869

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None Defined				
MAJOR					
101	Taper angle		1.0		Gage
102	Largest thickness		1.0		Gage
103	Overall length		1.0		Gage
MINOR					
201	Protective finish missing or inadequate		4.0		Visual
202	Missing Slot		4.0		Visual
203	Evidence of poor workmanship		1.0		Visual

NOTES:

DLDSR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63434A (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.40	Strap, Anchor	1 of 1	11785902
			NEXT HIGHER ASSEMBLY: 11785860

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None Defined				
MAJOR					
101	Hole diameters		1.0		Gage
MINOR					
201	Hole Locations		4.0		Gage
202	Width		4.0		Gage
203	Protective finish missing or inadequate		4.0		Visual
204	Evidence of poor workmanship		1.0		Visual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63434A (AR)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.41	Collar, Crush Switch		11785903
			NEXT HIGHER ASSEMBLY 11785869

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None Defined				
MAJOR					
101	Thread size		1.0		Gage
102	True position of thread major diameter		1.0		Gage
103	Flange angle missing		1.0		Visual
104	Thread length		1.0		Gage
MINOR					
201	I.D.		4.0		Gage
202	O.D.		4.0		Gage
203	Protective finish missing or inadequate		4.0		Visual
204	Evidence of poor workmanship		1.0		Visual

NOTES:

DRO[illegible]QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 7[illegible]Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63434A (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.42	Spring, Compression	1 OF 1	11785904
			NEXT HIGHER ASSEMBLY: 11785869

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR LOSS	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None Defined				
MAJOR					
101	Braze or Weld missing		1.0		Visual
102	Spring Data in Note 4				Certificate
MINOR					
201	Wire diameter		4.0		Gage
202	Direction of helix		4.0		Visual
203	O.D.		4.0		Gage
204	Protective finish missing or inadequate		4.0		Visual
205	Evidence of poor workmanship		1.0		Visual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.43	Ring, Retaining, Outer Tube				11785905
					NEXT HIGHER ASSEMBLY
					11785860
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None Defined				
MAJOR	None Defined				
MINOR					
201	Ring I.D.		4.0		Gage
202	Thickness		4.0		Gage
203	Protective finish missing or inadequate		4.0		Visual
204	Evidence of poor workmanship		1.0		Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63434A (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.44	Ring, Threaded	1 OF 1	11785906
			NEXT HIGHER ASSEMBLY: 11785869

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR LOSS	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None Defined				
MAJOR					
101	Thread size		1.0		Gage
MINOR					
201	Protective finish missing or inadequate		4.0		Visual
202	Missing holes		1.0		Visual
203	Evidence of poor workmanship		1.0		Visual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63434A (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.45	Lever, Stop	1 OF 1	11785907
			NEXT HIGHER ASSEMBLY: 11785861

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None Defined				
MAJOR	None Defined				
MINOR					
201	Location of shaft hole		4.0		Gage
202	Diameter of shaft hole min.		4.0		Gage
203	Protective finish missing or inadequate		4.0		Visual
204	Missing small hole		4.0		Visual
205	Evidence of poor workmanship		1.0		Visual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63434A (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.46	Ring, Wedge Outer	1 OF 1	11785908
			NEXT HIGHER ASSEMBLY: 11785869

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR (DO'S)	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None Defined				
MAJOR					
101	Taper angle		1.0		Gage
102	Largest Thickness		1.0		Gage
103	Overall Length		1.0		Gage
MINOR					
201	Protective finish missing or inadequate		4.0		Visual
202	Missing Slot		4.0		Visual
203	Evidence of poor workmanship		1.0		Visual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63434A (AR)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.47	Spring, Extension, Lever		11785909
			NEXT HIGHER ASSEMBLY
			11785861

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None Defined				
MAJOR					
101	Free length		1.0		Gage
102	Wire diameter		1.0		Gage
103	Minimum load requirement		1.0		Gage
104	Hook end radius		1.0		Gage
MINOR					
201	Protective finish missing or inadequate		4.0		Visual
202	Evidence of poor workmanship		1.0		Visual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63434A (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.48	Spring, Torsion Stop Lever	1 OF 1	11785910
			NEXT HIGHER ASSEMBLY 11785861

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None Defined				
MAJOR	None Defined				
MINOR					
201	Length of spring ends		4.0		Gage
202	Torque at maximum position		4.0		Gage
203	Wire diameter		4.0		Gage
204	Protective finish missing or inadequate		4.0		Visual
205	Evidence of poor workmanship		1.0		Visual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63434A (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.49	Spring, Extension Tube	1 OF 1	11785911
			NEXT HIGHER ASSEMBLY: 11785860

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None Defined				
MAJOR					
101	Hook ends radius		1.0		Gage
102	Min Load requirement		1.0		Gage
MINOR					
201	Free length		4.0		Gage
202	Wire diameter		4.0		Gage
203	Protective finish missing or inadequate		4.0		Visual
204	Evidence of poor workmanship		1.0		Visual
205	Loop end angle improper		4.0		Gage

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63434A (AR)

PARAGRAPH	TITLE		1 SHEET 1 OF 7		DRAWING NUMBER
4.4.2.50	Spacer, Sleeve				11785912
					NEXT HIGHER ASSEMBLY
					11785860
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None Defined				
MAJOR					
101	Overall length		1.0		Gage
102	I.D.		1.0		Gage
MINOR					
201	Evidence of poor workmanship		1.0		Visual

REMARKS

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63434A (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.51	Roller, Lever	1 OF 1	1785913
			NEXT HIGHER ASSEMBLY 11785864

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None Defined				
MAJOR					
101	I.D.		1.0		Gage
MINOR					
201	O.D.		4.0		Gage
202	Length		4.0		Gage
203	Evidence of poor workmanship		1.0		Visual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63434A (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.52	Post, Insulator	1 OF 1	11785914
			NEXT HIGHER ASSEMBLY 11785873

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None Defined				
MAJOR					
101	Dimensions Improper		1.0		Gage
MINOR					
201	Evidence of poor workmanship		1.0		Visual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63434A (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.53	Pin, Straight Headed	1 OF 1	11785915
			NEXT HIGHER ASSEMBLY: 11785860

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None Defined				
MAJOR	None Defined				
MINOR					
201	Location of hole		4.0		Gage
202	Countersinks missing		4.0		Visual
203	Protective finish missing or inadequate		4.0		Visual
204	Evidence of poor workmanship		1.0		Visual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63434A (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.94	Grommet, Rubber	1 OF 1	11785917
			NEXT HIGHER ASSEMBLY: 11785860

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None Defined				
MAJOR	None Defined				
MINOR					
201	Seat Diameter		4.0		Gage
202	Evidence of poor workmanship		1.0		Visual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63434A (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.55	Spacer, Mechanism Staking	1 OF 1	11785918
			NEXT HIGHER ASSEMBLY 11785861

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None Defined				
MAJOR	None Defined				
MINOR					
201	Spacer thickness		4.0		Gage
202	Evidence of poor workmanship		1.0		Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63434A (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.56	Bushing, Nylon	1 OF 1	11785919
			NEXT HIGHER ASSEMBLY 11785861

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None Defined				
MAJOR	None Defined				
MINOR					
201	I.D.		4.0		Gage
202	Small O.D.		4.0		Gage
203	Evidence of poor workmanship		1.0		Visual
203	Wire diameter		4.0		Gage
204	Protective finish missing or inadequate		4.0		Visual
205	Evidence of poor workmanship		1.0		

NOTES:

DESC-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63434A (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.57	Tape, Plastic				11785920
					NEXT HIGHER ASSEMBLY 11785921
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None Defined				
MAJOR	None Defined				
MINOR	None Defined				

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63434A (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.58	Borerider Assembly	1 OF 1	11785921
			NEXT HIGHER ASSEMBLY 11785860

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None Defined				
MAJOR					
101	Tape Location		1.0		Gage
MINOR					
201	Evidence of poor workmanship		1.0		Visual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.59	Spring, Conduit	1 OF 1	11785923
			NEXT HIGHER ASSEMBLY 11785870

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL IN OR ≡ 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None Defined				
MAJOR					
101	Loop radius improper		1.00		Gage
MINOR					
201	Maximum gaps		4.00		Gage
202	Protective finish missing or inadequate		4.00		Visual
203	Evidence of poor workmanship		1.00		Visual

NOTE:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63434A (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.60	Terminal Assembly	1 OF 1	11785925 -1,-2,-3,-4
			NEXT HIGHER ASSEMBLY -1 & -2-11785860 -3 & -4-11785870

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None Defined				
MAJOR					
101	Lug crimped improperly		1.0		Visual
102	Separation force of terminal assembly		1.0		Gage
103	Electrical continuity between terminal lug and end of wire		1.0		Ohmmeter
104	Length		1.0		Gage
MINOR					
201	Insulation on wire damaged or defective		4.0		Visual
202	Evidence of poor workmanship		1.0		Visual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63434A (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.61	Washer, Saddle				11785926
					NEXT HIGHER ASSEMBLY 11785860
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None Defined				
MAJOR	None Defined				
MINOR					
201	Evidence of poor workmanship		1.0		Visual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63434A (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.62	Insulator, Inner Cone	1 OF 1	11785927
			NEXT HIGHER ASSEMBLY 11785873

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None Defined				
MAJOR					
101	Location of Posts		1.0		Gage
MINOR					
201	Evidence of poor workmanship		1.0		Visual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63434A (AR)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.63	Insulator, Spacer		11785928
			NEXT HIGHER ASSEMBLY 11785873

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None Defined				
MAJOR					
101	Absence of small diameter section		1.0		Visual
MINOR					
201	Evidence of poor workmanship		1.0		Visual

NOTES:

DEQAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil - Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63434A (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.64	Cap, Insulator	1 OF 1	11785929
			NEXT HIGHER ASSEMBLY 11785868

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None Defined				
MAJOR					
101	Integrity of part, cracks		1.0		Visual
102	I.D.		1.0		Gage
MINOR					
201	Evidence of poor workmanship		1.0		Visual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63434A (AR)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.65	Ring, Retaining		11785932
			NEXT HIGHER ASSEMBLY 11785870

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None Defined				
MAJOR					
101	Wire diameter		1.0		Gage
MINOR					
201	Evidence of poor workmanship		1.0		Visual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil - 72 Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63434A (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.66	Shaft, Straight, Roller, Lever				11785933
					NEXT HIGHER ASSEMBLY 11785864
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None Defined				
MAJOR	None Defined				
MINOR					
201	O.D.		4.0		Gage
202	Overall Length		4.0		Gage
203	Protective finish missing or inadequate		1.0		Visual
204	Evidence of poor workmanship		1.0		Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.67	Shaft, Straight, Stop Lever	1 OF 1	11785935
			NEXT HIGHER ASSEMBLY: 11785861

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None Defined				
MAJOR					
101	Depth of grooves		1.0		Gage
MINOR					
201	O.D.		4.0		Gage
202	Length between grooves		4.0		Gage
203	Protective finish missing or inadequate		4.0		Visual
204	Evidence of poor workmanship		1.0		Visual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.68	Shaft, Shouldered, Spring	1 of 1	11785936
			NEXT HIGHER ASSEMBLY: 11785861

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None Defined				
MAJOR					
101	Minor O.D.		1.0		Gage
*MINOR					
201	Major O.D.		4.0		Gage
202	Evidence of poor workmanship		1.0		Visual

NOTES:

DRD:R-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

4.4.3 Testing. All inspection shall be classified Major unless otherwise specified. Testing is described for the First Article and Lot Acceptance.

4.4.3.1 Ambient deployment. This test shall be performed 100 percent in accordance with the test specified in 4.5.3. Any assembly failing to meet the requirements shall be classified defective and removed from the lot.

4.4.3.2 Electrical resistance. This test shall be performed 100 percent in accordance with the test specified in 4.5.4.1. Any assembly failing to meet the requirements shall be classified defective and removed from the lot.

4.4.3.3 Electrical capacitance. This test shall be performed 100 percent in accordance with the test specified in 4.5.4.2. Any assembly failing to meet the requirements shall be classifed defective and removed from the lot.

4.4.3.4 Angular alignment. This test shall be conducted for First Article and Lot Acceptance as specified in Table I and II. Test in accordance with 4.5.10. If any unit does not meet the criteria, the lot shall be rejected.

4.4.3.5 Missile flight vibration. This test shall be conducted for First Article and Lot Acceptance as specified in Table I and II. Test in accordance with Para. 4.5.5. If any unit does not meet the criteria, the lot shall be rejected.

4.4.3.6 Launch shock. This test shall be conducted for First Article as specified in Table I. Test in accordance with Para. 4.5.6. If any unit does not meet the criteria, the lot shall be rejected.

4.4.3.7 Transportation vibration. This test shall be conducted for First Article and Lot Acceptance as specified in Table I and II. Test in accordance with Para. 4.5.7. If any unit does not meet the criteria, the lot shall be rejected.

4.4.3.8 Cold deployment. This test shall be conducted for First Article and Lot Acceptance as specified in Table I and II. Test in accordance with Para. 4.5.8. If any unit does not meet the criteria, the lot shall be rejected.

4.4.3.9 Hot deployment. This test shall be conducted for First Article and Lot Acceptance as specified in Table I and II. Test in accordance with Para. 4.5.9. If any unit does not meet the criteria, the lot shall be rejected.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

4.4.4 Inspection Equipment. The inspection equipment required to perform the examinations and tests prescribed herein is described in the "Paragraph Reference/Inspection Method" column in the tables starting with Paragraph 4.4.2.1. The contractor shall submit for approval inspection equipment designs in accordance with the terms of the contract. See Section 6 of MIL-A-48078 and 6.3 herein.

4.5 Test methods.

4.5.1 Materials, components and processes. Compliance with all requirements of Section 3 of this specification shall be ascertained by current and continuing examination of inspection and test data to determine that all components (parts, subassemblies, and materials) have been inspected and tested and found to comply with their respective drawing and specification requirements, and that all specified manufacturing processes have been followed.

4.5.2 Visual, mechanical, and electrical inspections. The visual, manual and electrical inspections and tests shall verify compliance with the requirements of Sections 3 and 5 of this specification in accordance with 4.4.2 herein and Tables I and II.

4.5.3 Ambient deployment. The stowed unit shall be mounted to an appropriate test fixture. (For in process testing, the ogive and bore rider assembly will not be assembled to the unit and therefore the test fixture shall be modified to account for the missing bore rider assembly.) The bore rider shall be released to a point 7/8-inch from the surface of the ogive. The unit shall not deploy. The bore rider shall then be allowed to release for a distance of 1-3/8 inches from the ogive surface. The probe shall deploy and lock within the required time and to the required length.

4.5.4 Electrical tests

4.5.4.1 Electrical resistance. For First Article and Lot Acceptance testing, measure the electrical resistance in the deployed position. However, for in process testing, measure the electrical resistance in the stowed position after the probe has experienced ambient deployment.

4.5.4.2 Electrical capacitance. For First Article and Lot Acceptance testing, measure the capacitance in the deployed position. However, for in process testing, measure the capacitance in the stowed position after the unit has experienced ambient deployment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

4.5.5 Missile flight vibration. The deployed assembly shall be attached to the vibration excitor utilizing a rigid fixture capable of transmitting the vibration spectrum specified in Figures 2A, 2B and 2C. Vibration shall be applied sequentially along each of three orthogonal axis. The acceleration power spectral density for each axis as measured on the probe/fixture interface shall be in accordance with Figures 2A, 2B and 2C (Figure 1 defines the appropriate axes). During vibration the brown/black leads shall be monitored for switch closures of .001 sec at 100 Vdc potential. At the completion of all vibration, the probe shall be inspected for evidence of damage and integrity of lock.

4.5.6 Launch shock. Attach a stowed unit to a fixture which will provide rigid mounting. Employing a shock tester, apply a 400 g $\pm$ 10% 1/2 sine wave pulse for 10 $\pm$ 3 milliseconds. The axis of impact shall pass through the longitudinal axis of the unit under test with loads imposed in the direction of launch (Figure I defines the appropriate axes). The unit under test shall not be visibly damaged nor its performance impaired by exposure to the environments described herein.

4.5.7 Transportation vibration. The stowed unit under test shall be attached to the vibration exiter utilizing a rigid fixture capable of transmitting the vibration conditions specified herein. A control accelerometer shall be located close to the test unit. Vibration input, as defined by Figure 1, shall be imposed in each of the specified axes for 2.0 hours. The unit under test shall not be visibly damaged nor its performance impaired by exposure to the environments described herein.

4.5.8 Cold deployment. Temperature chamber(s) shall have an internal volume at least twice that of the unit(s) under test. The chamber shall have sufficient capacity such that the system will not interfere with the maintenance of the test conditions during period of systems operability. Condition the unit at -25°F for a minimum of 4 hours. For low temperature conditioning, the unit under test may be placed in a bag to reduce buildup of frost which might prejudice deployment. Within 2 minutes of removal from conditioning chamber, remove bag if present, and perform the test described in 4.5.3. Any unit which fails to deploy and lock shall be considered defective.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

TRANSPORTATION VIBRATION					
Longitudinal Axis		Vertical Axis		Transverse Axis	
Frequency Hz	Random Vibration 2/Hz	Frequency Hz	Random Vibration g^2/Hz	Frequency Hz	Random Vibration g^2/Hz
17	0.002	18	0.145	20	0.078
17-20	18 db/oct	18-20	18 db/oct	20-75	3 db/oct
20-30	0.03	20-45	0.21	75-120	0.29
30-100	-6 db/oct	45-55	-12 db/oct	120-400	-3 db/oct
100	0.003	55-175	0.10	400	0.085
		175-300	-3 db/oct		
		300	0.055		

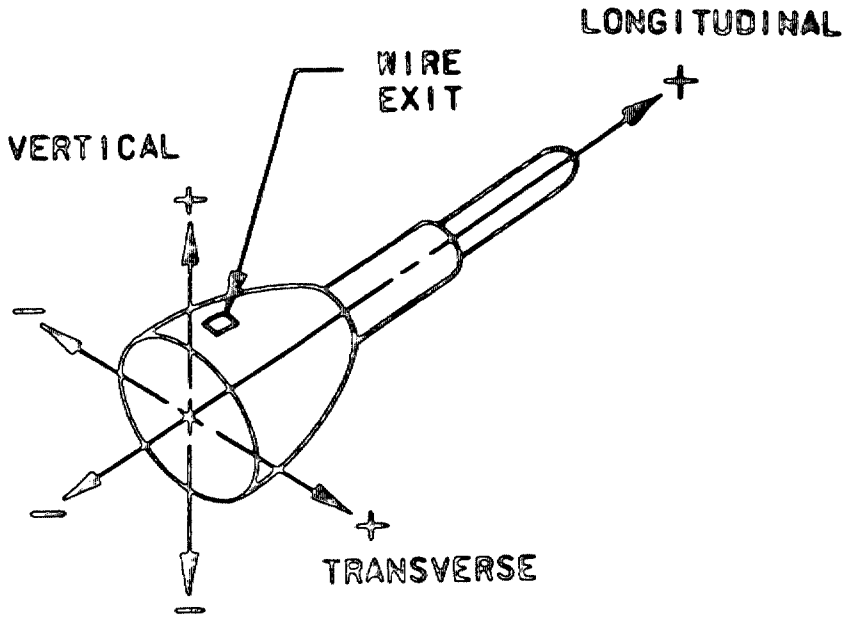
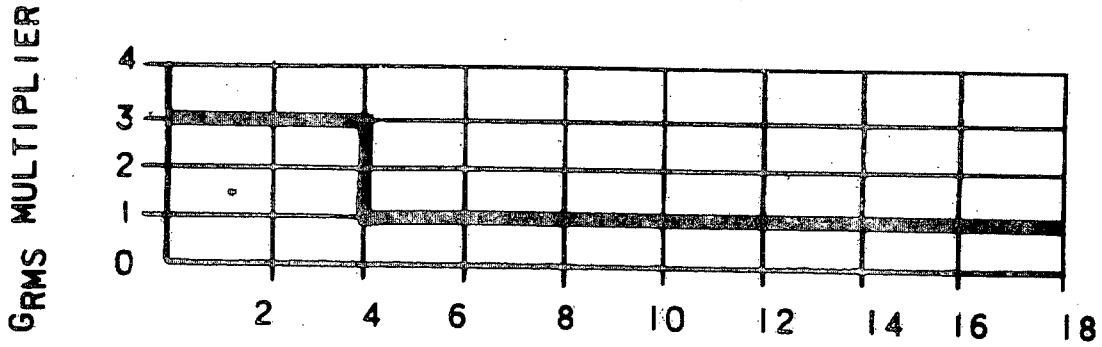


FIGURE 1 - TRANSPORTATION VIBRATION

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.



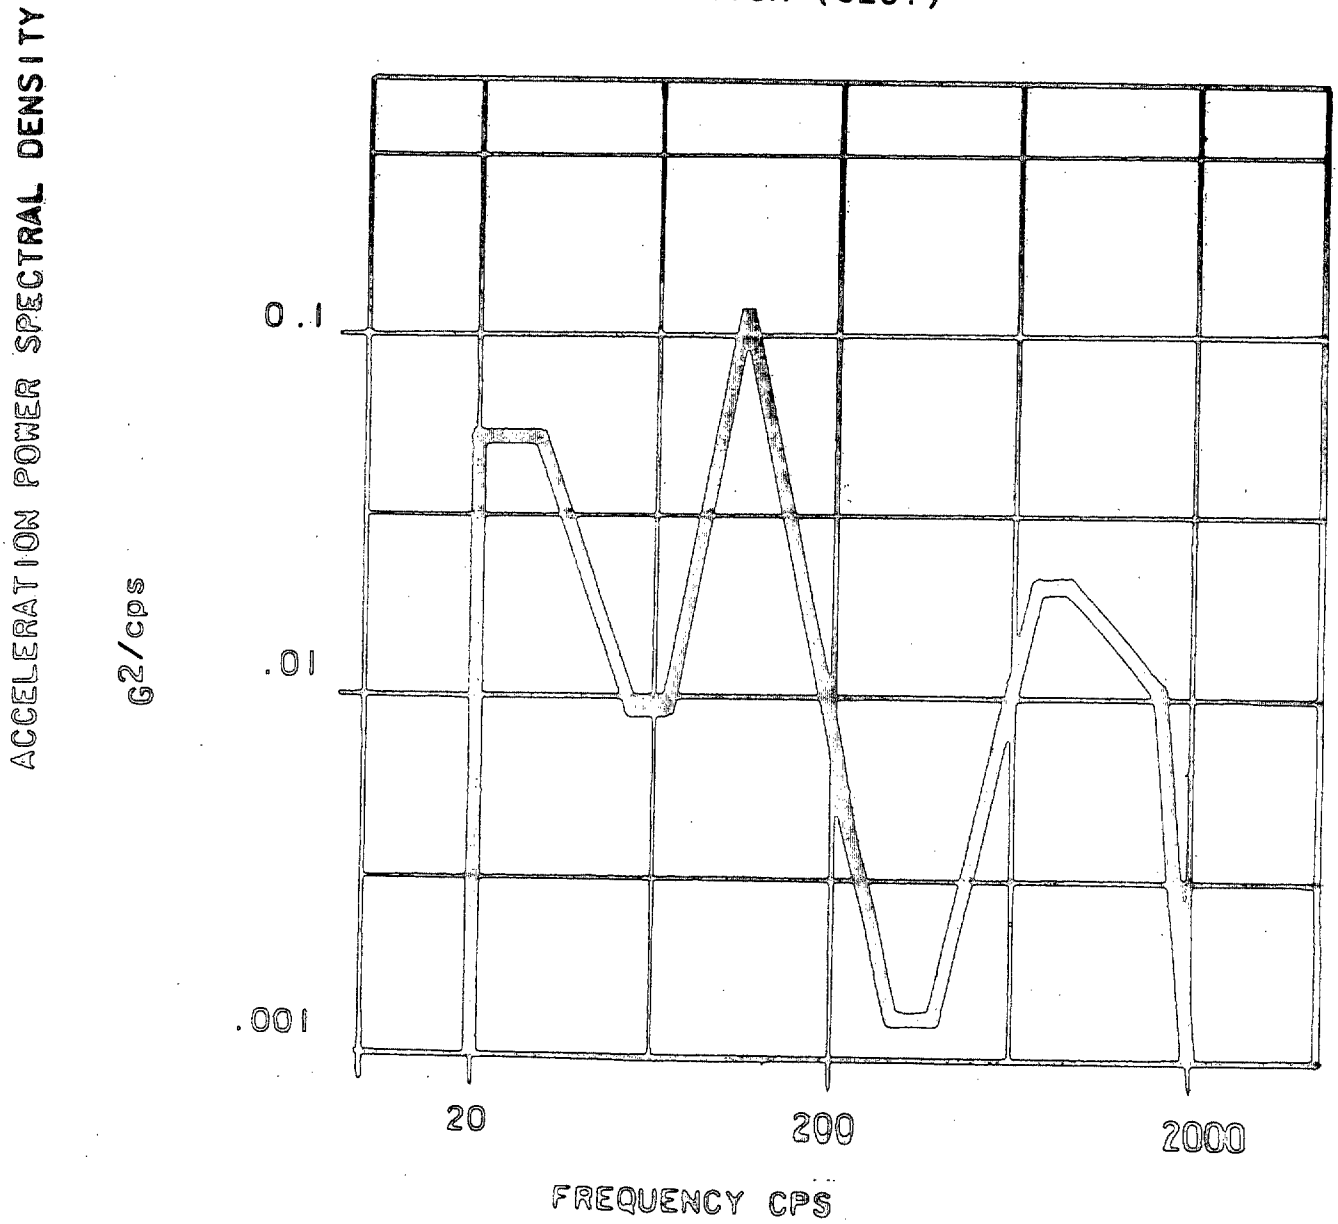
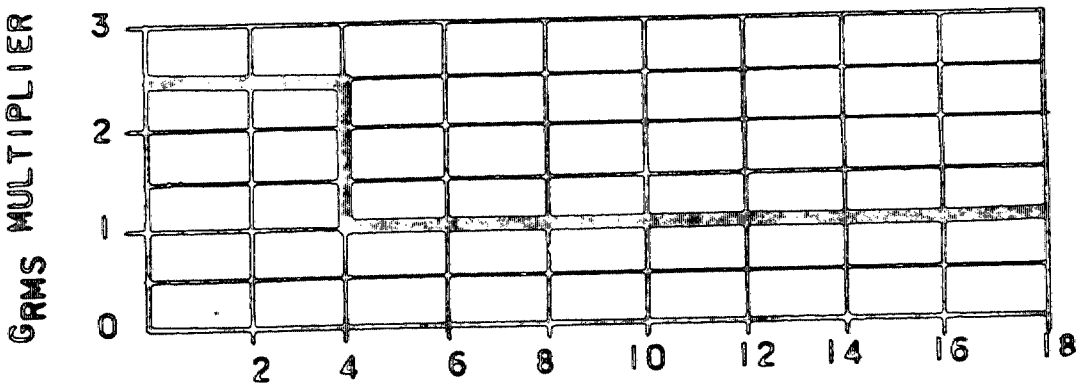


FIGURE 2A - TRANSVERSE AXIS FLIGHT VIBRATION

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.



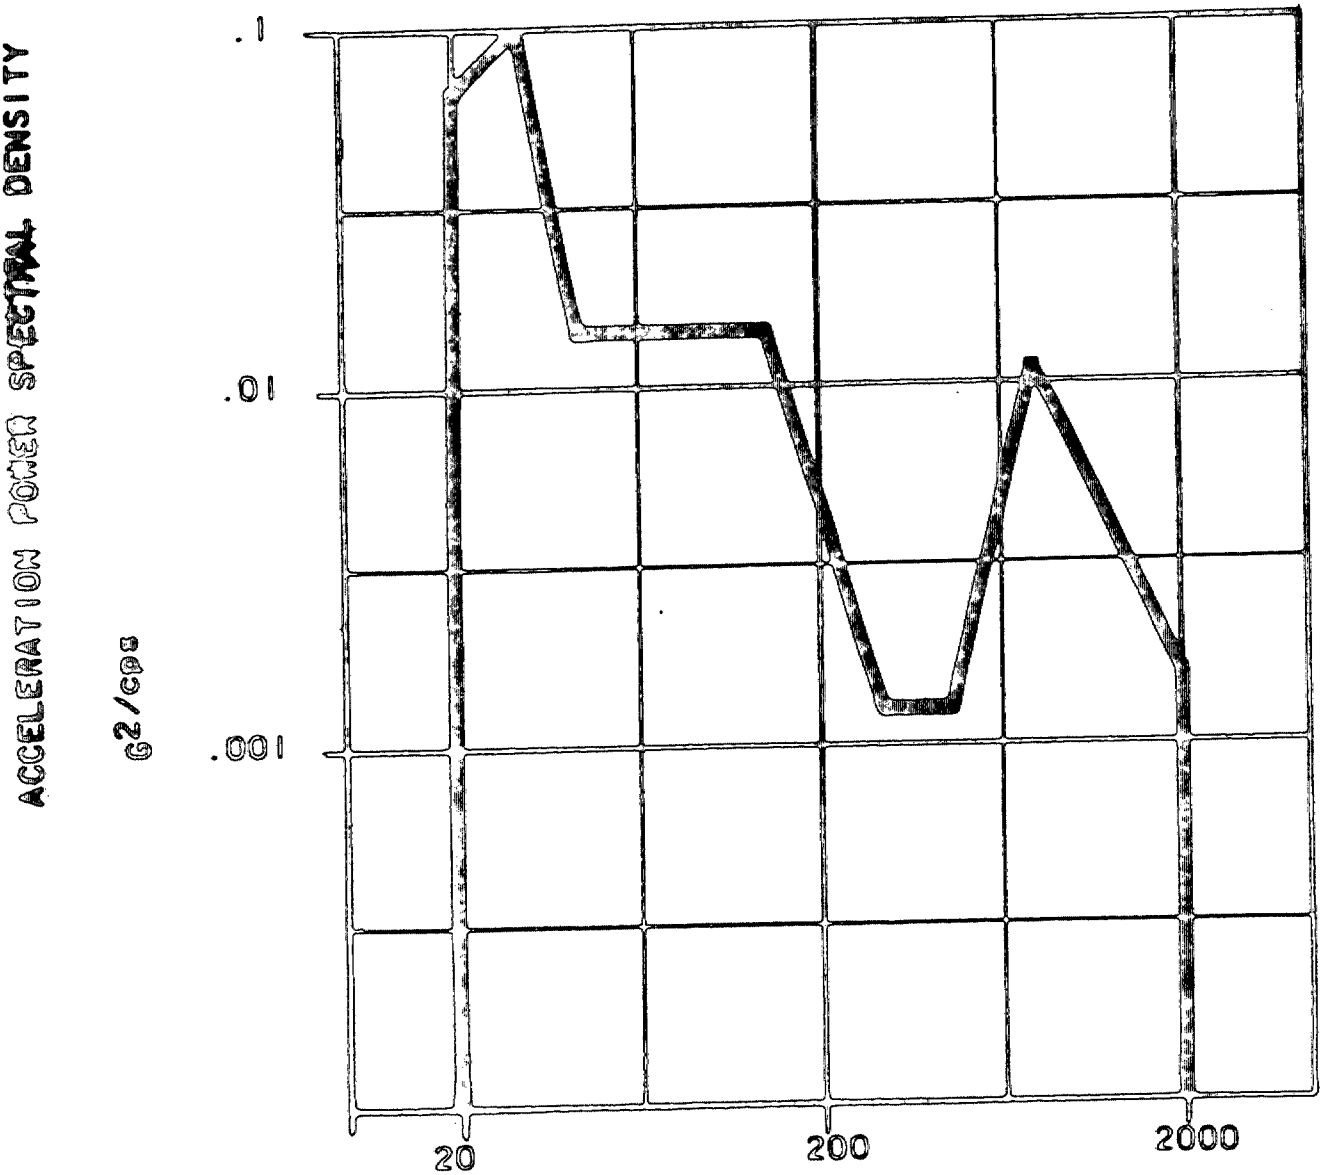
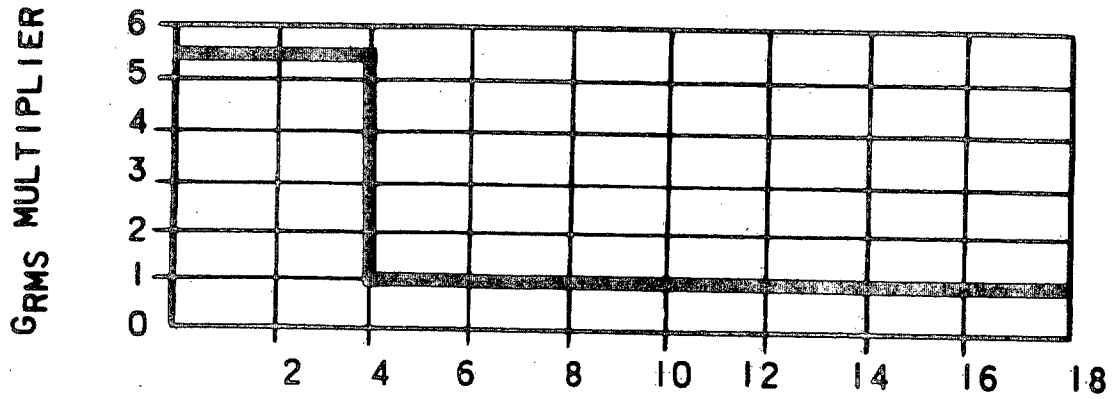


FIGURE 28. VERTICAL AXIS, FLIGHT VIBRATION

Source: https://assist.dla.mil - Downloaded: 2026-03-26T04:21Z
Check the source to verify that this is the current version before use.



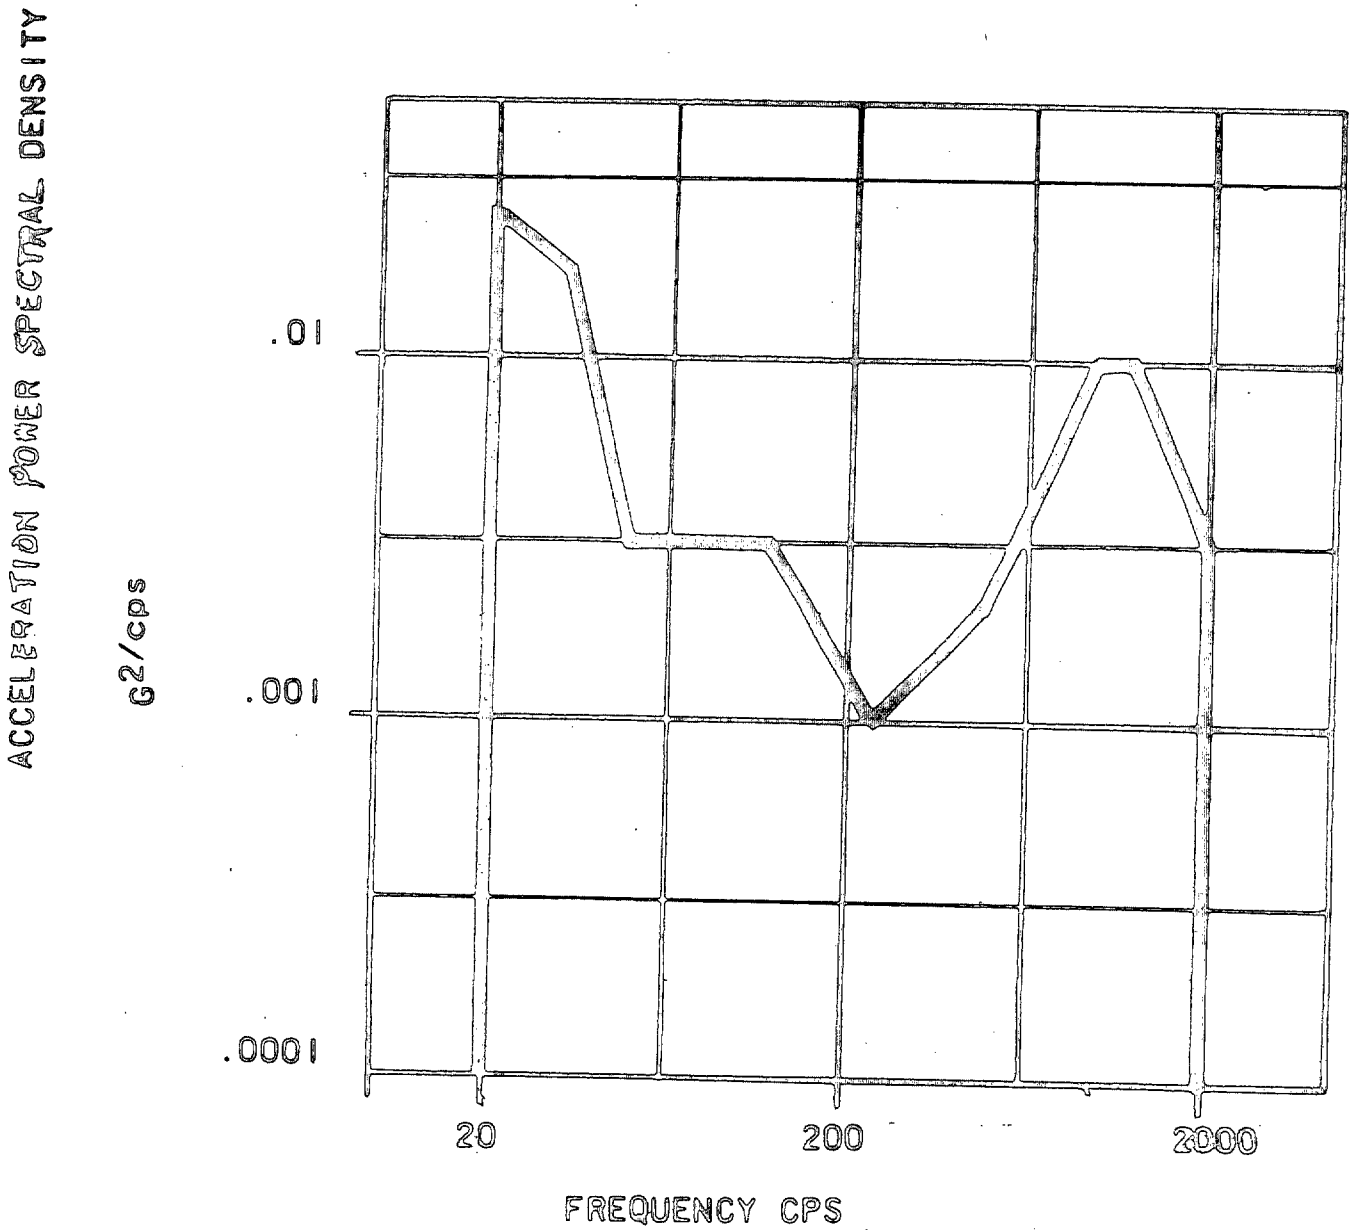


FIGURE 2C. - LONGITUDINAL AXIS, FLIGHT VIBRATION

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

4.5.9 Hot deployment. Temperature chambers shall have an internal volume at least twice that of the unit(s) under test. The chamber(s) shall have sufficient capacity such that the system will not interfere with the maintenance of the test conditions during period of systems operability. Condition the unit at + 140°F for a minimum of 4 hours. Within 2 minutes of removal from conditioning chamber perform the test described in 4.5.3. Any unit which fails to deploy and lock shall be considered defective.

* 4.5.10 Probe angular alignment. The unit shall be deployed as described in 4.5.3. Apply a load of 18 pounds to a point 10.5 inches from the ogive/tube joint. The load shall be applied perpendicularly to the warhead centerline in the following order: At 0°, 180°, 90° and 270°. Measure the resulting probe angle relative to the warhead centerline as defined in 3.12. Any unit which exceeds one degree relative to the warhead centerline or the one degree change in angle due to load reversal shall be considered defective.

5. PACKAGING

5.1 Preservation and packaging. Preservation and packaging shall be such as to prevent deterioration or damaged during handling and shipment to the first destination.

5.2 Packing. Packing shall be in a manner to insure carrier acceptance and safe delivery at destination. Containers shall be in accordance with Uniform Freight Classification rules or regulations of other carriers applicable to the mode of transportation.

6. NOTES

* 6.1 Intended use. It is intended that the probe defined by this specification shall be used on the Improved TOW warhead M207E1, for use in the TOW Guided Missile BGM-71C.

6.2 Ordering data. See MIL-A-48078.

6.2.1 Procurement requirements.

a. Title, number and date of this specification.

b. Quantity required and delivery schedules.

c. Serialization requirements, if applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

d. Quality Conformance Inspection, if other than specified in Section 4 of item detail specification.

e. First Article sample requirements, if other than specified in Section 4 of item detail specification.

f. Packaging requirements, if other than specified in Section 5 of the detail specification.

g. Certificates of conformance for each lot or shipment of product.

6.3 Submission of designs for approval. See 6.2.3 of MIL-A-48078. Submit equipment designs, as required to Commander, ARRADCOM, ATTN: DRDAR-QAR-I, Dover, New Jersey 07801. The letter of submittal shall state contractor, contract number, specification number, item nomenclature and classification of defects or test paragraph.

6.4 Changes from previous issue. The margins of this specification are marked with asterisks to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationships to the last previous issue."

Custodian:
Army-AR

Preparing Activity:
Army-AR

(Project 1336-A421)

☆U.S. GOVERNMENT PRINTING OFFICE: 1992—605-034/47660

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
	☐ USER
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.