Supersession Data
(See 6.4)

MILITARY SPECIFICATION

LIGHT, FLUORESCENT, MAGNIFYING, ADJUSTABLE ARM

This specification has been approved by the Naval
Air Systems Command, Department of the Navy

1. SCOPE

1.1 This specification covers the requirements for adjustable arm, magnifying, fluorescent, light.

2. APPLICABLE DOCUMENTS

2.1 Government documents normally furnished - The following documents of the issue in effect on the date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

Federal

QQ-P-416	Plating, Cadmium (Electrodeposited)
QQ-S-571	Solder; Tin Alloy, Lead-Tin Alloy and Lead Alloy
TT-I-528	Ink, Drawing, Waterproof, Black
UU-P-223	Paper, Drawing
UU-P-553	Paper, Wrapping, Tissue
PPP-B-636	Box, Fiberboard
PPP-B-640	Box, Fiberboard, Corrugated, Triple-Wall

FSC 6230

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T04:37Z
Check the source to verify that this is the current version before use.

Military

MIL-P-116	Preservation, Methods of
MIL-D-1000/1	Drawings, Engineering and Associated Data
MIL-C-3432	Cable and Wire, Electrical (Power and Control); Semi-Flexible, Flexible, and Extra-Flexible, (300 and 600 Volts)
MIL-C-5015	Connectors, Electric, "AN" Type
MIL-S-6872	Soldering Process, General Specification for
MIL-I-7444	Insulation Sleeving, Electrical, Flexible
MIL-F-14256	Flux, Soldering, Liquid (Resin Base)

STANDARDS

Federal

FED-STD-595	Colors

Military

MIL-STD-129	Marking for Shipment and Storage
MIL-STD-130	Identification Marking for U.S. Military Property
MIL-STD-143	Specifications and Standards, Order of Precedence for the Selection of
MIL-STD-167	Mechanical Vibrations of Shipboard Equipment
MIL-STD-461	Electromagnetic Interference Characteristics Requirements for Equipment
MIL-STD-704	Electric Power, Aircraft, Characteristics and Utilization of
MIL-STD-740	Airborne and Structureborne Noise Measurements and Acceptance Criteria of Shipboard Equipment

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:37Z
Check the source to verify that this is the current version before use.

MIL-STD-810	Environmental Test Methods
MS3107	Connector, Plug, Electric, Quick Disconnect
MS33586	Metals, Definition of Dissimilar

(When requesting applicable documents, refer to both title and number. Copies of unclassified documents may be obtained from the Commanding Officer, Naval Publications and Forms Center, 5801 Tabor Avenue, Philadelphia, Pennsylvania 19120. Requests for copies of classified documents should be addressed to the Naval Publications and Forms Center, via the cognizant Government representative.)

2.2 Other Publications - The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

United States of America Standards Institute

USAS No. C78.416-1968	USA STANDARD Dimensional and Electrical Characteristics of 22 Watt, T-9, 8 inch. Circular, Rapid-Start Fluorescent Lamp
USAS No. C82.1-1968	USA STANDARD Fluorescent Lamp Ballasts, Specification for

(Application for copies should be addressed to the USASI, 10 East 40th Street, New York, N.Y. 10016.)

Underwriter's Laboratories (UL), Inc.

No. 153	Standard for Portable Electric Lamps

(Application for copies should be addressed to the Underwriter's Laboratories, Inc. 161 Avenue of the Americas, New York, N.Y. 10013; 207 East Ohio Street, Chicago, Ill. 60611; or 1655 Scott Lane, Santa Clara, Calif. 95050.)

3. REQUIREMENTS

3.1 First article - The light furnished under this specification shall be a product which has been inspected and passed the first article inspection specified herein (see 4.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:37Z
Check the source to verify that this is the current version before use.

3.2 Selection of specifications and standards - Specifications and standards for necessary commodities and services not specified herein shall be selected in accordance with MIL-STD-143.

3.3 Materials - Materials shall conform to the applicable specifications and shall be as specified herein and on the applicable drawings. Materials which are not covered by applicable specifications or standards shall be of the best quality, and entirely suitable for the purpose intended.

3.3.1 Metals - All metal parts shall be of a corrosion-resistant type.

3.3.1.1 Dissimilar metals - Dissimilar metals shall not be used in intimate contact unless suitably protected against electrolytic corrosion. Metal plating or metal spraying of dissimilar base metals to provide similar or suitable abutting surfaces is permitted. The use of dissimilar metals separated by a suitable insulating material is also permitted. Dissimilar metals are defined in MS33586.

3.3.1.2 Solder - Solder for electrical connections shall be type SN-60 in accordance with QQ-S-571, either plain or fluxcore. If flux is used, it shall be resin in accordance with the requirements of MIL-S-6872 and MIL-F-14256.

3.4 Design and construction - The light and its parts shall be designed and constructed to withstand the stresses, jars, vibrations and other conditions incident to shipping, storage, installation and service. The exact design and configuration shall be optional, provided the light is essentially in accordance with Figure 1 and provided all requirements specified herein are met, including dimensions shown in drawings.

3.4.1 Power source - The light shall operate from single phase alternating current (ac), 190-207 volts r.m.s., 380-420 cycles per second power source, whose other characteristics are in accordance with MIL-STD-704, category "A".

3.4.2 Lamp illumination - The lighting of objects in the field of view of the magnifier shall be provided by a 22-watt, T-9, 8-inch, circular, rapid-start fluorescent lamp conforming to USAS C78.416-1968. The lamp shall be mounted concentrically with the lens. The plane of the lamp shall be parallel to the plane of the lens and not more than 1-inch below the plane of the lens. The lamp shall be mounted in a manner that will hold it securely in place during use and yet allow lamp replacement without the use of tools.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:37Z
Check the source to verify that this is the current version before use.

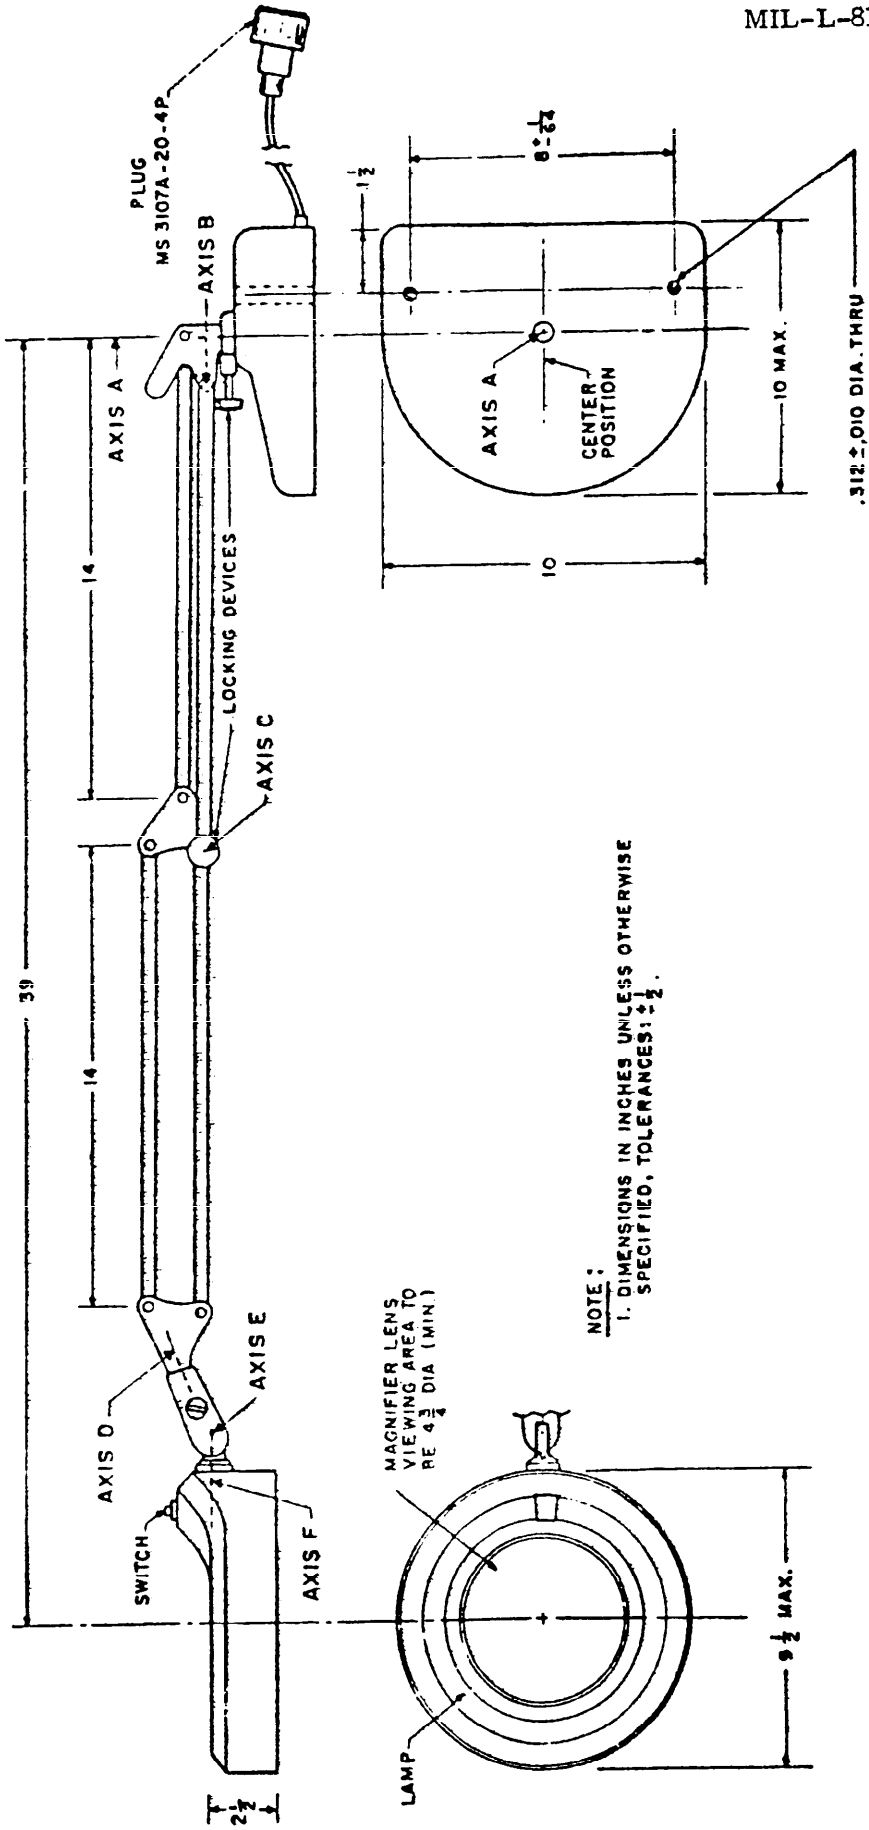


Figure 1. Light Configuration

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T04:37Z
Check the source to verify that this is the current version before use.

3.5 Maintainability - The lighting unit shall be constructed to facilitate ease of operation, maintenance and repair.

3.6 Performance characteristics - The light shall meet the performance requirements in Section 4 in the order listed below:

(a)	Illuminance test	(4.6.2)
(b)	Field of view test	(4.6.3)
(c)	Aberrations test	(4.6.4)
(d)	Dielectric strength test	(4.6.5)
(e)	Switch test	(4.6.6)
(f)	Environmental tests	(4.6.7)
(g)	Electromagnetic interference test	(4.6.8)
(h)	Noise level test	(4.6.9)

3.7 Details of components -

3.7.1 Major mechanical components - The light shall consist of a base, arms, reflector and magnifier.

3.7.1.1 Base - The light base shall be all metal construction of the approximate size and shape shown in Figure 1. The base shall be weighted so that it will support the lamp, lens and reflector assembly in any position, within the limits specified, when the base is placed on, but not secured to, a flat level surface. The base shall be designed with a metal plate on the bottom to provide a flat surface and act as an enclosure for the electrical components within the base. The base shall be provided with two through holes as shown in Figure 1. Stops shall be provided that will allow the arms to swing around axis A, at least, plus or minus 135 degrees, but not more than plus or minus 150 degrees from center position. A device shall be provided at axis A to lock the lower arms in any desired position with respect to the base, within the limits specified, when the base is positioned at any angle not to exceed 30 degrees from level.

3.7.1.2 Adjustable arms - The adjustable arms shall be all metal construction and of the approximate size and shape shown in Figure 1. The arms shall be designed to hold the lens-lamp-reflector unit when placed in any position within the limits specified and when the light assembly base is on a level surface and the arms are unlocked. The two sets of arms shall be capable of being moved around axis C from a position as close to each other as 5 degrees and be separated from each other as much as 180 degrees.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:37Z
Check the source to verify that this is the current version before use.

The arms shall be capable of being extended to the three extreme positions shown in Figures 1 and 2. A device shall be provided at axis C to lock the two sets of arms in any desired position with respect to each other, within the limits specified, when the base is positioned at any angle not to exceed 30 degrees from level.

3.7.1.3 Reflector - The lamp reflector shall be designed to reflect light from the lamp to objects in the field of view of the magnifier. The reflector shall be the mounting unit for the magnifying lens and the lamp. The lamp reflector shall be all metal and shall act as a starting aid for the lamp as required by USAS C82.1-1968. The lamp reflector shall be circular in shape, approximately 9 inches in outside diameter and be approximately 2 1/2 inches in depth. The reflector shall be mounted to the arms by swivels that will allow the reflector to be easily moved with respect to the arms and capable of holding the reflector in any position it is placed, within limits specified. The three swivels, at axis D, at axis E and at axis F, (see Figures 1 and 3) shall be capable of being moved at least 70 degrees from their center positions in either direction, but limited to not more than 90 degrees in either direction. The swivels, at axes D, E and F shall have provisions to compensate for normal wear. The center position of axis D, axis E and axis F is shown in Figure 3.

3.7.1.4 Magnifier - The magnifier shall be a 3 diopter, distortion-free lens. The magnifier shall be high-quality, clear, optical glass, carefully ground and polished. The magnifying lens shall be designed and constructed in such a manner that the light entering the lens shall be conducted to the eye with a minimum of loss.

3.7.1.5 Springs - Springs may be used in the lighting fixture. If used, they shall meet the requirements of 3.4.2.

3.7.2 Major electrical components -

3.7.2.1 Ballast - The ballast shall operate from any power source conforming to 3.4.1 and shall provide the proper voltage and current to the lamp for starting and operation so that maximum useful life can be obtained from the lamp. The ballast circuitry shall meet all the applicable requirements of USAS C82.1-1968.

3.7.2.2 Switch - The light switch shall be designed to control the electrical power for starting and operating the lamp. The switch shall be of the manually operated type designed to provide a pre-heat cycle before lighting the lamp. The switch shall have a single operating actuator to provide both functions. The switch shall be mounted on the reflector as shown in Figure 1.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:37Z
Check the source to verify that this is the current version before use.

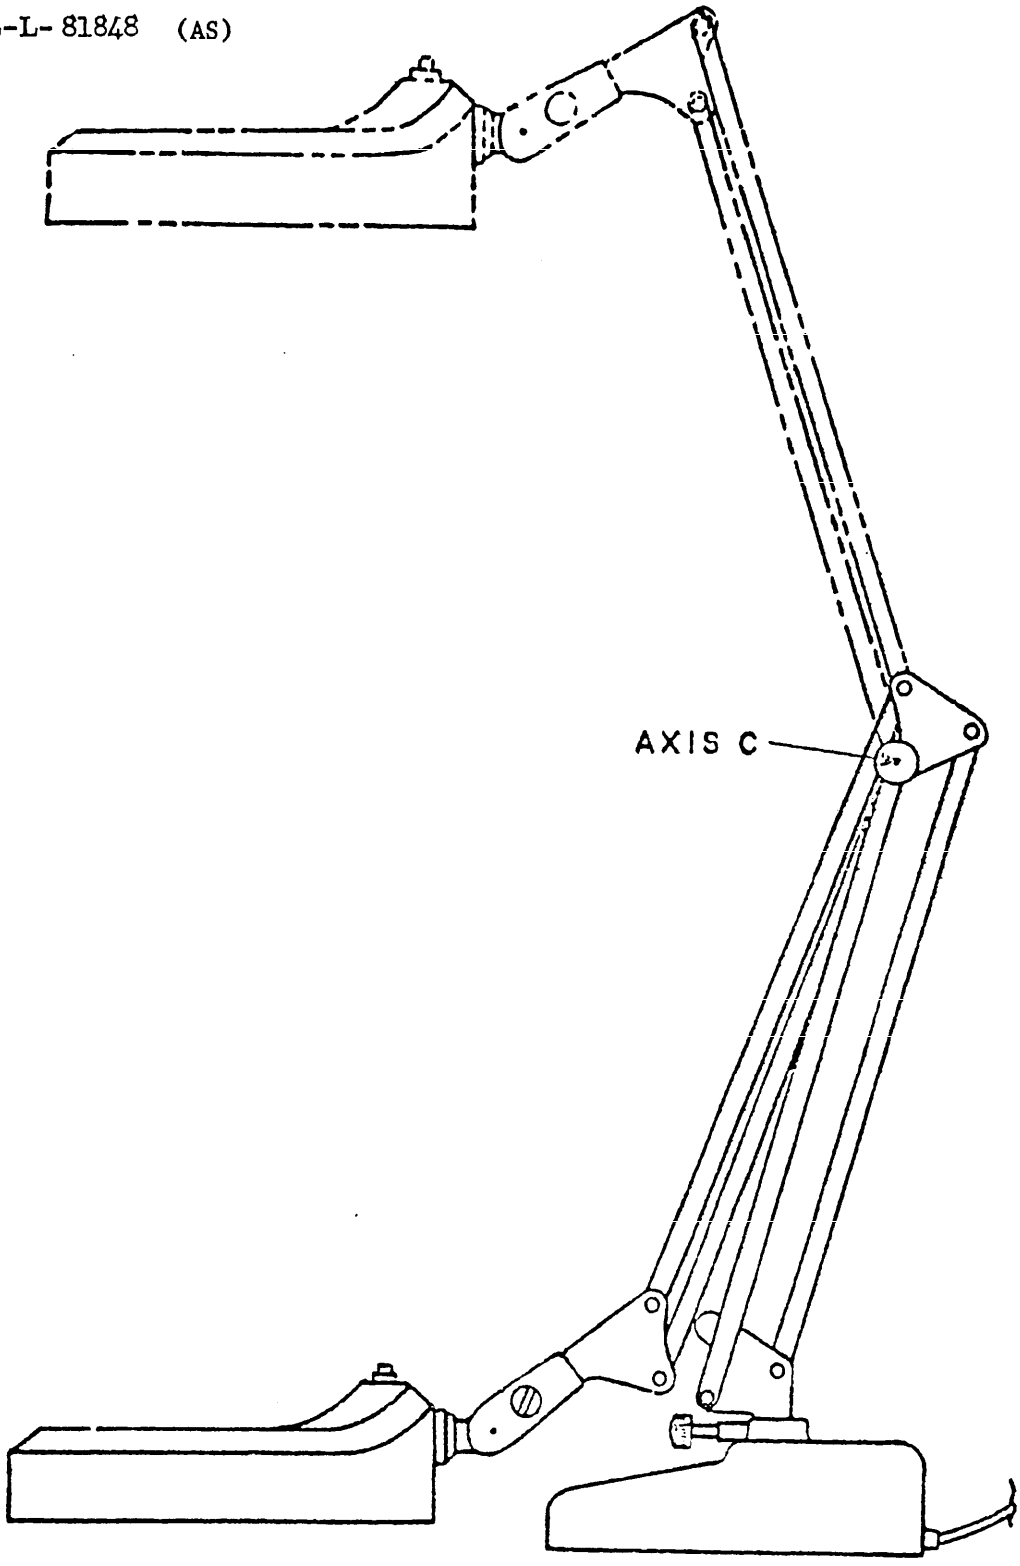


Figure 2. Extreme Positions of Arms

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:37Z
Check the source to verify that this is the current version before use.

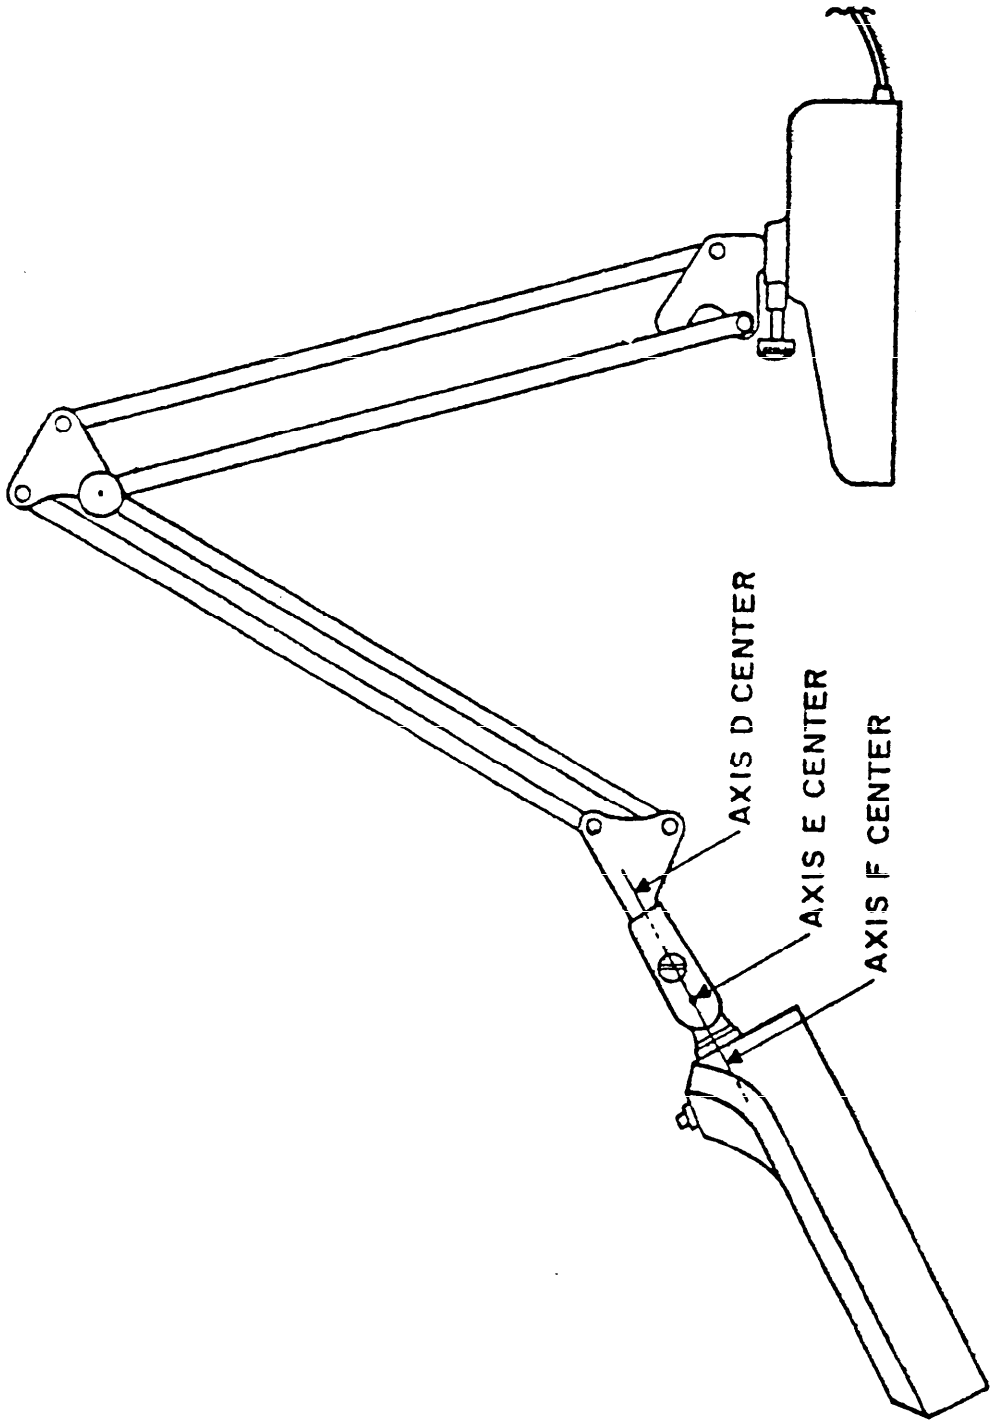


Figure 3. Axes Center Position

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T04:37Z
Check the source to verify that this is the current version before use.

grees vertical per minute. The beam spread shall be not less than 8 degrees horizontal by 7 deg

3.7.2.3 Insulation - Energized parts of the light shall be insulated to prevent short-circuiting and to eliminate the possibility of personnel coming in contact with live equipment. The light shall meet all the applicable requirements of the Underwriter's Laboratories (U.L.) Standard 153 in regards to fire and casualty hazards.

3.7.2.3.1 Sleeving - Electrical insulation sleeving shall be in accordance with MIL-I-7444.

3.7.2.4 Wiring, external - The external power cable for the light shall have three number 18, American Wire Gage (AWG) wires connected and color coded as shown in Figure 4. The power cable shall have a minimum length of six feet. The free end of the power cord shall be terminated with a MS3107A-20-4P electrical connector that is in accordance with MIL-C-5015. The power cord shall be protected with a suitable grommet and strain relief at the point the cord enters the light assembly base. Wire shall be in accordance with MIL-C-3432, Class MD, flexible (F) type.

3.7.2.5 Wiring, internal - The internal wiring of the light assembly shall be fully enclosed. A grounding wire (green) shall be connected to the same point that the input power cord green wire is connected and also electrically connected to the light assembly reflector. Wire shall be in accordance with MIL-C-3432, Class MD, flexible (F) type.

3.8 Part numbering of interchangeable parts - All parts having the same manufacturer's part number shall be functionally and dimensionally interchangeable. The item identification and part number requirements of MIL-D-1000/1 shall govern the manufacturer's part numbers and changes thereto.

3.9 Dimensions - Dimensions shall be as shown on Figure 1. Dimensions that are not shown shall be as small as practicable.

3.10 Weight - The light, including all of its components, shall not weigh more than 30 pounds.

3.11 Color and finish - Metal parts that are corrosion-resistant steel shall be chromium or nickel plated. The inside surfaces of the lamp reflector shall be painted glossy white in accordance with FED-STD-595, color number 17875. The exterior surfaces of other metal parts shall be painted light gray, semi-gloss in accordance with FED-STD-595. Springs, if used, shall be cadmium plated and baked in accordance with QQ-P-416, class 1, Type 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:37Z
Check the source to verify that this is the current version before use.

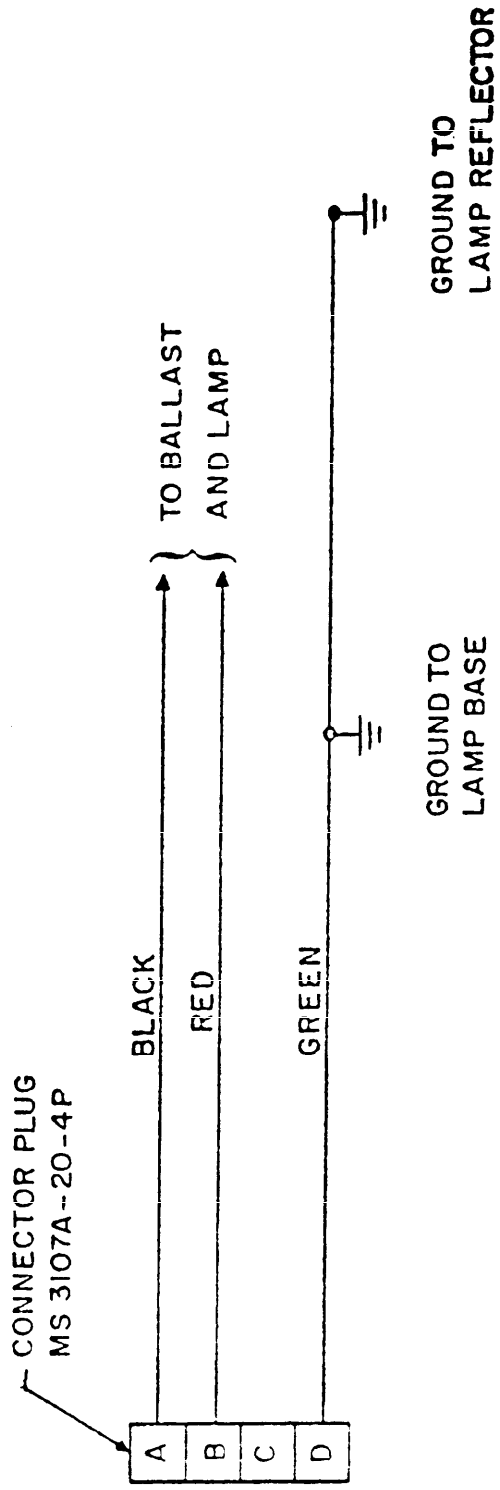


Figure 4. Power Code Wiring (Schematic) Drawing

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T04:37Z
Check the source to verify that this is the current version before use.

3.12 Identification of product -

3.12.1 Nameplate - Each light shall be provided with a nameplate permanently affixed to the light assembly base. The nameplate shall be engraved or etched with markings in accordance with MIL-STD-130.

3.12.2 Caution note - A caution note shall be engraved or etched on a plate and permanently affixed to the lamp reflector in a conspicuous place near the lens. The note shall contain the following information:

CAUTION. Keep lens out of direct sunlight.

3.13 Workmanship - The light shall be constructed and finished in a thoroughly workmanlike manner. Particular attention shall be paid to neatness and thoroughness of soldering, welding, brazing, painting, wiring, alignment of parts and tightness of assembly screws and bolts; and also to freedom from burrs and sharp edges. Units shall be thoroughly cleaned of loose, spattered or excess solder, resin, metal chips and other foreign material. The cleaning methods used shall not be injurious to any of the parts nor shall any of the parts be contaminated by the cleaning agents employed.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection - Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may utilize his own facilities or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure the supplies and services conform to prescribed requirements.

4.2 Classification of inspection - The inspection of the light shall be classified as follows:

(a) First article inspection (4.3).

(b) Quality conformance inspection (4.4).

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T04:37Z
Check the source to verify that this is the current version before use.

4.3 First article inspection - First article inspection shall consist of all the inspections of this specification conducted in the following order:

(a)	Examination	(4.6.1)
(b)	Illuminance test	(4.6.2)
(c)	Field of view test	(4.6.3)
(d)	Aberrations test	(4.6.4)
(e)	Dielectric strength test	(4.6.5)
(f)	Switch test	(4.6.6)
(g)	Environmental tests	(4.6.7)
(h)	Electromagnetic interference test	(4.6.8)
(i)	Noise level test	(4.6.9)

4.3.1 Sampling for first article inspection - Unless otherwise specified, as soon as practicable after award of a contract or order, the contractor shall furnish one light for inspection to determine conformance with this specification. The sample shall be identified with the manufacturer's part number and contract number and shall be inspected as specified herein and in accordance with the contract or order (see 6.2).

4.4 Quality conformance inspection - The quality conformance inspection shall consist of the individual inspections and sampling tests.

4.4.1 Individual inspection - Each light on the contract or order shall be subjected to the following inspections. Any light containing a defect or failing to pass the inspection shall be rejected.

(a)	Examination	(4.6.1)
(b)	Illuminance test	(4.6.2)
(c)	Field of view test	(4.6.3)
(d)	Abberations test	(4.6.4)
(e)	Dielectric strength test	(4.6.5)

4.4.2 Sampling tests - A random sample shall be selected from each inspection lot in accordance with Table I, and shall be subjected to the following inspections. If a sample fails to pass either test, the lot represented by that sample shall be rejected.

(a)	Electromagnetic interference test	(4.6.8)
(b)	Noise level Test	(4.6.9)

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T04:37Z
Check the source to verify that this is the current version before use.

Table I. Sample For Acceptance

Quantity Submitted For Acceptance	Sample Size
First 20	3
Next 20	2
Each additional 20 or fraction thereof	1

4.5 Test conditions - Unless otherwise specified, lights shall be subjected to inspection under the following ambient conditions:

(a) Temperature — 25 degrees C, plus 15 degrees, minus 5 degrees C

(b) Altitude — Normal ground

(c) Humidity — 90 percent or less

4.6 Inspection methods -

4.6.1 Examination - The light shall be thoroughly examined to determine conformance with this specification and applicable drawings with respect to all the requirements not covered by tests specified herein.

4.6.1.1 The light shall be examined to ascertain that the preparation for delivery conforms to this specification.

4.6.2 Illuminance test - The light shall be turned on in a darkened area. A direct light measurement shall be made with a light meter positioned 13.13 inches (1/3 meter) from the lens. The light shall produce an illuminance of at least 125-foot-candles.

4.6.3 Field of view test - The light shall be placed on a flat level surface and the magnifier lens positioned so that it is 13.13 inches (1/3 meter) from and parallel to the flat level surface. An optical test target conforming to Figure 5 shall be placed on the flat level surface, with the target circle center positioned on the principal axis of the magnifier within plus or minus 0.05 inch. The inspector's eyes shall be centered about the principal axis of the lens and ten inches from the lens. The entire outside circle of the target shall be visible when viewed as specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:37Z
Check the source to verify that this is the current version before use.

4.6.4 Aberrations test - There shall be no evidence of color, burring or bowing of the grid lines within the smaller circle of the test target when viewed through the magnifier with the test conditions as specified in 4.6.3.

4.6.5 Dielectric strength test - A test voltage of 900 plus or minus 10 volts, rms, 60 hertz shall be applied for 1 plus or minus 0.1 minute between the base and the current carrying parts of the light. There shall be no evidence of insulation breakdown.

4.6.6 Switch test - The switch shall be subjected to 6,000 cycles of operation. Operation of the switch to one "off" and one "on" setting shall constitute one cycle. The load imposed on the switch shall be 250 watts and 150 volts. Opening and closing the circuit shall be at a rate of 20 times per minute. There shall be no evidence of breakdown, malfunction, or failure during the test.

4.6.7 Environmental tests -


4.6.7.1 High temperature test - The light shall be maintained in a test chamber at plus 85 degrees C (plus 185 degrees F) for at least 48 hours. The internal chamber relative humidity shall not exceed 15 percent. There shall be no degradation of parts and finishes as a result of this test. When the light has returned to room temperature, it shall be subjected to, and pass, the tests of 4.6.2 to 4.6.5 inclusive.

4.6.7.2 Low temperature test - The light shall be maintained in a test chamber at minus 17.8 degrees C (0.0 degrees F) for at least 48 hours. There shall be no degradation of parts and finishes as a result of this test. When the light has returned to room temperature, it shall be subjected to, and pass, the tests of 4.6.2 to 4.6.5 inclusive.

4.6.7.3 Fungus test - The light shall be subjected to a fungus test in accordance with MIL-STD-810, Method 508, Procedure I. There shall be no increase in the growth of fungi and there shall be no damage to the light as a result of this test. At the conclusion of the test the light shall be subjected to, and pass, the tests of 4.6.2 to 4.6.5 inclusive.

4.6.7.4 Vibration test - The light shall be secured to the vibrator at the two through holes in the base. The light shall be subjected to a vibration test in accordance with MIL-STD-167, Type I, with the arms locked in the approximate position shown in Figure 2, and the reflector in the upper position. Neither of the arms shall be resting against its stop. There shall be no damage as a result of this test, no parts shall work loose and the light shall remain locked in essentially the same position throughout the test. At the conclusion of the test, the light shall be subjected to and pass the tests of 4.6.2 to 4.6.5 inclusive.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:37Z
Check the source to verify that this is the current version before use.

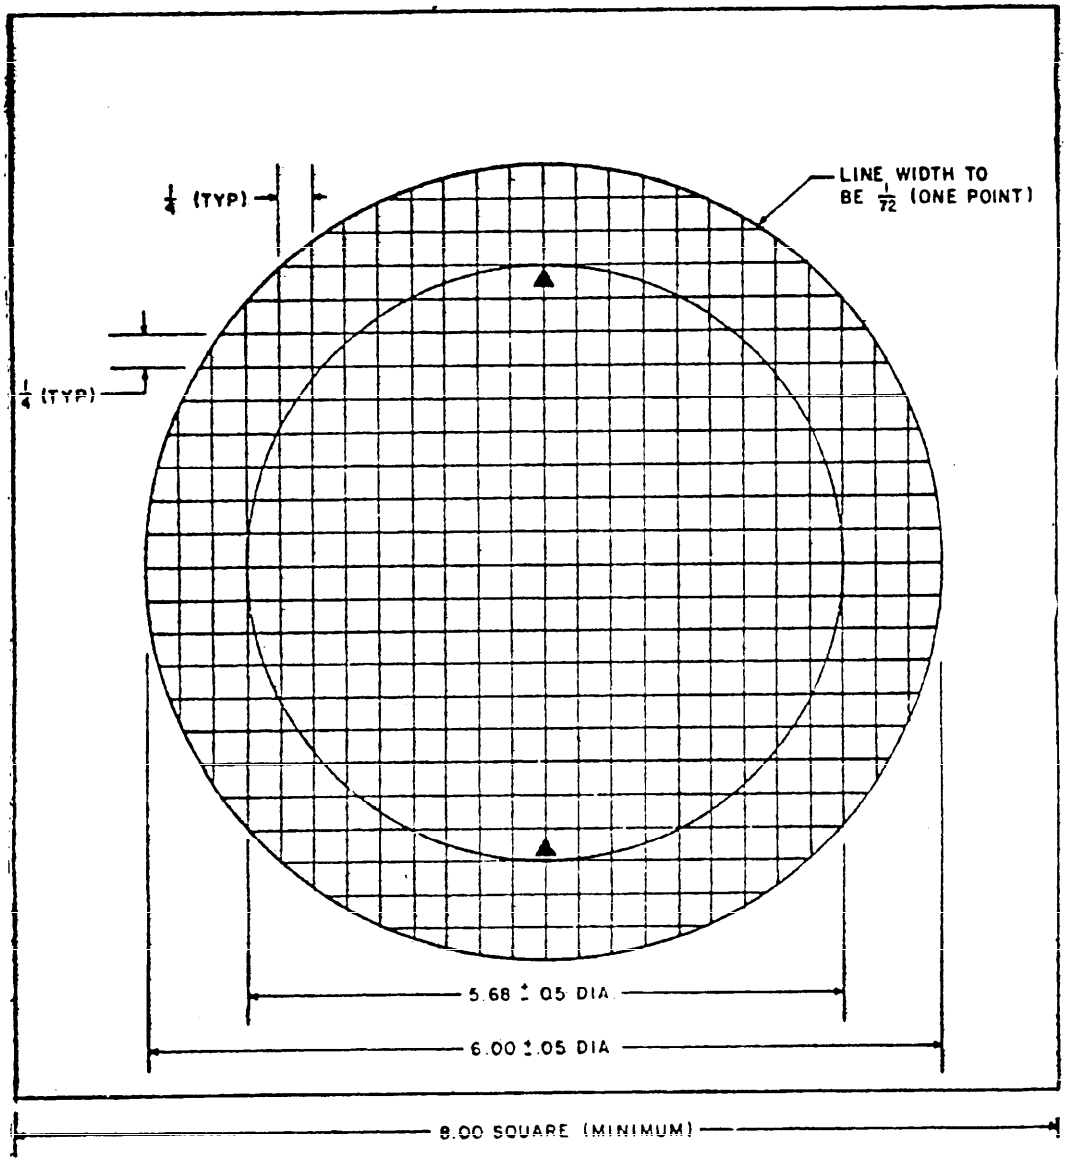

1. ALL DIMENSIONS IN INCHES. TOLERANCES AS SPECIFIED.
2. THE TEST TARGET SHALL BE PREPARED ON DRAWING PAPER CONFORMING TO UU-P-223 TYPE I.
3. DRAWING INK CONFORMING TO TT-I-528 SHALL BE USED TO CONSTRUCT GRID LINES ON TEST TARGET. LINES SHALL BE CLEAN AND SHARP.
4. CENTER GRID LINES SHALL CROSS AT CENTER OF CIRCLES.
5. GRID LINES SHALL INTERSECT AT 90° ANGLES.

Figure 5. Optical Test Pattern

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T04:37Z
Check the source to verify that this is the current version before use.

4.6.7.5 Salt fog test - The light shall be subjected to a salt fog test in accordance with MIL-STD-810, Method 509, Procedure I. There shall be no corrosion of the light as a result of this test. At the conclusion of the test, the light shall be subjected to, and pass, the tests of 4.6.2 to 4.6.5 inclusive.

4.6.8 Electromagnetic interference test - The light shall be subjected to, and pass, the electromagnetic interference test specified in MIL-STD-461 for class II B equipment in the 0.15 to 150 MHz band. The radiated measurements shall be taken at a distance of five feet from the light base with the lamp reflector positioned as close to the base as possible.

4.6.9 Noise level test - The light shall be subjected to, and pass, a noise level test in accordance with MIL-STD-740, for Grade A equipment.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging - Preservation and packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A -

5.1.1.1 Preservation - Not required.

5.1.1.2 Packaging - The light shall be packaged in accordance with Method III of MIL-P-116 utilizing a single or double face corrugated carton or wrap, securely taped or tied to cushion and protect the reflector section. This shall follow an initial wrap in tarnish-proof wrapping tissue conforming to UU-P-553.

5.1.2 Level C packaging - The light shall be packaged to afford the minimum degree of protection necessary to prevent deterioration or damage during shipment under normal environmental conditions and commercial modes of transportation.

5.2 Packing - Packing shall be level A, B or C as specified (see 6.2).

5.2.1 Level A - The lights, packaged as specified, shall be packed in fiberboard containers conforming to PPP-B-636, Type I or II, Class 2, or conforming to PPP-B-640, Class 2, sufficiently blocked, braced and cushioned by scored or die-cut corrugated sheets to transfer this type 3 (difficult) load to a type 1 (easy) load. Closures of all containers shall be in accordance with the respective container specifications or appendices thereto.

5.2.2 Level B - The lights, packaged as specified, shall be packed in fiberboard containers conforming to PPP-B-636, Type I or II, Class I, or conforming to PPP-B-640, Class 1, sufficiently blocked, braced and cushioned by scored or die-cut corrugated sheets

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T04:37Z
Check the source to verify that this is the current version before use.

to transfer this type 3 (difficult) load to a type 1 (easy) load. Closures of all containers shall be in accordance with the respective container specifications or appendices thereto.

5.2.3 Level C - The lights, packaged as specified, requiring overpacking shall be packed in exterior containers in a manner that will insure safe transportation at the lowest rate to point of delivery, and shall meet as a minimum, the requirements of the rules and regulations applicable to the mode of transportation selected.

5.3 Marking - In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use - The light covered by this specification is intended for use on avionics workbenches and shipboard and shorebased establishments, as a visual aid while repairing or inspecting miniature components.

6.1.1 Definitions - The optical terms used herein are defined in MIL-STD-1241.

6.2 Information for contracting officer - Contracts or orders should specify the following:

(a) Title, number and date of this specification.

(b) Selection of applicable level of packaging and packing required (see 5.1 and 5.2).

(c) Special marking, if required (see 5.3).

(d) Items of data required (see 6.3).

(e) The light subjected to the first article inspection is not to be considered or shipped as part of the contract or order.

(f) Engineering change procedure in accordance with NAVAIR INST 4275.3A. The Naval Air Systems Command, Department of the Navy, Washington, D.C. 20360 (Attn: AIR-534), will be responsible for review of class I changes under the contract. The Commanding Officer, Naval Air Engineering Center, Philadelphia, Pa. 19112 (Attn: GSED) will be responsible for approval of class II changes.

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T04:37Z
Check the source to verify that this is the current version before use.

the lamp, shall be tested for shockproofness in ... Sheet. The searchlight, less

6.2.1 Contracts or orders should specify the following provisions for first article inspection.

6.2.1.1 Whether first article inspection is required. When a contractor is in continuous production of the light from contract to contract, consideration should be given to waive the first article inspections. If first article inspection is required, indicate:

(a) Where the first article inspection is to be conducted (at the contractor's plant or Government or commercial laboratory).

(b) That the approval of first article samples or the waiving of the first article inspection shall not relieve the contractor of his obligation to fulfill all other requirements of the specification and contract.

6.3 Data - For the information of the Contractors and Contracting Officers, any of the data specified in (a) subparagraphs below, (b) applicable documents listed in Section 2 of this specification, or (c) referenced lower-tier documents need not be prepared for the Government and shall not be furnished to the Government unless specified in the contract or order. The data to be furnished shall be listed on DD Form 1423 (Contractor Data Requirements List), which shall be attached to and made part of the contract or order. NAVAIR Form 4200/25 (Drawings, Lists, and Specifications Required) shall be attached where applicable.

6.3.1 Instruction sheet - The instruction sheet shall include instructions describing the operation of the light, a descriptive drawing, and complete maintenance instructions.

6.4 Supersession data - This specification includes the requirements of purchase description XWS 5070.

Preparing Activity
Navy - AS
(Project No. 6230-N124)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:37Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity *(as indicated on reverse hereof)*.

SPECIFICATION

MIL-L-81848(AS) LIGHT, FLUORESCENT, MAGNIFYING, ADJUSTABLE ARM

ORGANIZATION *(Of submitter)*	CITY AND STATE

CONTRACT NO.	QUANTITY OF ITEMS PROCURED	DOLLAR AMOUNT
		$

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES.

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)*	DATE

DD, FORM 1 APR 62 1426

C-8870

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:37Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY

Naval Air Systems Command
Washington, D.C. 20360

POSTAGE AND FEES PAID
NAVY DEPARTMENT

OFFICIAL BUSINESS

NAVAL AIR SYSTEMS COMMAND (AIR-52021)
DEPARTMENT OF THE NAVY
WASHINGTON, D. C. 20360

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:37Z
Check the source to verify that this is the current version before use.