MIL-M-81702B(AS)
7 August 1980
SUPERSEDING
MIL-M-81702A(AS)
24 July 1972

MILITARY SPECIFICATION

MANUAL, TECHNICAL, AIRBORNE WEAPONS (CONVENTIONAL); REQUIREMENTS FOR

This specification has been approved by the Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers technical content requirements for preparation of technical manuals for description, assembly, inspection, checkout, maintenance, and handling of conventional airborne weapons in work package format.

2. APPLICABLE DOCUMENTS

2.1 Issue of documents. The following documents of the issue in effect on date of invitation for bids or requests for proposal form a part of this specification to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-M-81203	Manuals, Technical: In-Precess Reviews, Validation, and Verification Support of
MIL-M-81927	Manuals, Technical: General Style and Format of (Work Package Concept)

Beneficial comments (recommendation, additions, deletions) and any pertinent data which may be of use in improving this document shall be addressed to the Commanding Officer, Naval Air Engineering Center, Engineering Specifications and Standards Department (ESSD) Code 93, Lakehurst, NJ 08733 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC TMSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:36Z
Check the source to verify that this is the current version before use.

MIL-M-81929	Manuals, Technical: Illustrated Parts Breakdown, Preparation of (Work Package Concept)

STANDARDS

MILITARY

MIL-STD-444	Nomenclature and Definitions in the Ammunition Area
MIL-STD-681	Identification Coding and Application of Hook Up and Lead Wire
MIL-STD-709	Ammunition Color Coding

PUBLICATIONS

NAVY

OPNAVINST 4790.2	The Navy Aviation Maintenance Program
NAVAIR 00-25-600	In-Process Review, Validation and Verification Guide

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 General. Technical manuals prepared in accordance with this specification shall contain instructions that are based on sound engineering principles and techniques, engineering analysis, service experience, performance data, and available reliability and maintainability data. Practices, procedures, and techniques contained in general maintenance, loading, tactical, ship weapon installation and other technical manuals shall not be duplicated. Maintenance procedures shall reflect the approved maintenance plan and provisioning documentation applicable to the equipment covered. Information for Government Furnished Equipment (GFE) and vendor procured items shall be covered to the degree specified by the requiring activity (see 6.2.1).

3.2 Data. Requirements for airborne weapons maintenance data established in this specification shall be prepared in accordance with the Data Item Description (DID) and the applicable Technical Manual Contract Requirement (TMCR).

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:36Z
Check the source to verify that this is the current version before use.

3.3 Conflict between specifications. When the requirements of other specifications conflict with the technical content requirements specified herein, the requirements of this specification shall apply.

3.4 Manner of preparation. The technical manuals shall be prepared in work package (WP) format meeting the general style and format requirement of MIL-M-81927.

3.4.1 Nomenclature. In addition to the requirements of MIL-M-81927, weapon and component nomenclature shall be in accordance with MIL-STD-444. Nomenclature of weapons and components not listed in MIL-STD-444, should be requested from the procuring activity (see 6.2.1).

3.4.2 Color code reference. Reference to weapon color codes shall be in accordance with MIL-STD-709. Reference to wiring color codes shall be in accordance with MIL-STD-681. Where wiring does not conform to MIL-STD-681, it shall be explained in the introduction of the manual.

3.5 Arrangement. Generally, the arrangement of the technical content WP's shall be in accordance with the breakdown of the equipment. The number of technical content WP's required to cover the various functional elements shall depend on the complexity of the equipment and the amount of information required to cover each functional element. Coverage shall include description, preparation for use, maintenance (if required), shipboard and shorebased handling and storage, and emergency procedures.

3.5.1 Multi-weapon manual. When the requiring activity specifies that more than one type of weapon are to be covered in one manual, all functional elements of one weapon type shall be completely covered before the next weapon type is presented. A weapon type may be covered in a single WP; however, if the amount of data is sufficient to require more than one WP, a logical division of the functional elements shall be made to comply with the page count requirement contained in MIL-M-81927 (see 6.2.1).

3.5.1.1 When different MARK, AN designations, etc coverage of a single weapon type contains other than minor data differences, all functional elements of each MARK or AN designation shall be covered separately. Each MARK and AN designation shall be completely covered before the next MARK or AN designation is presented.

3.5.1.2 The WP, or the first WP, if more than one WP is required, covering a weapon type, MARK or AN designation shall include an introduction containing peculiar information such as purpose, use, and service life of the particular weapon type, MARK, or AN designation. (See figure 1).

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:36Z
Check the source to verify that this is the currentversion before use.

3.6 Technical content - general.

3.6.1 Support equipment required. (See figure 2). Support equipment required to perform maintenance or operational checks shall be listed in WP's containing the procedure to which the support equipment applies. Only those tools and equipment authorized for use at the level of maintenance covered shall be listed. If the WP contains multi level maintenance procedures, and one or more of the support equipment items listed is authorized for use only at one level of maintenance, the application shall be indicated by the use of an asterisk (*) following the nomenclature of the item and an appropriate notation following the list. For example, "* Authorized for use at depot-level only". Standard hand tools shall not be listed; however, standard measuring equipment, such as voltmeters and torque wrenches shall be listed. Parameters and the accuracy of standard measuring equipment shall also be shown, i.e., 0-50 VAC, ±1% accuracy. Support equipment shall be listed in alphanumerical sequence by Type designation or part number and nomenclature under the heading "Support Equipment Required". Illustrations shall not be provided in support of such lists but may be provided in support of maintenance procedures; for example, as required to illustrate the fabrication of interconnecting cables or other locally manufactured items of this category.

3.6.1.1 Alternate items. If an approved alternate item can be used, it shall be listed by part number, in parentheses, following the prime part number. The term "or equivalent" shall not be used to indicate alternate part numbers. The requirement to list alternate part numbers shall not be interpreted to mean that the contractor shall perform research to provide such alternates. If information on an equivalent item is provided to the contractor for inclusion in the manual, the item shall be listed, as indicated above. A note or statement shall be included to explain the use of parentheses for identification of alternate items.

3.6.2 Materials required. (See figure 2). Materials required lists shall be prepared when consumable materials and expendable items are required to perform work on WP procedures. Materials required lists shall follow the support equipment required lists (if applicable) in WP's containing the procedures in which the materials are used, and shall be listed by specification number or part number and nomenclature. The quantity of items required to perform the task shall follow the nomenclature in parentheses. Materials will always be listed by Government specification number unless alternate identification is approved by the requiring activity (see 6.2.1).

3.6.3 Log book entries. All maintenance actions requiring entries in weapon or equipment log books shall be identified in accordance with OPNAVINST 4790.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:36Z
Check the source to verify that this is the current version before use.

3.7 Technical content - detailed.

3.7.1 Introduction. In addition to the requirements of MIL-M-81927, the introduction shall briefly summarize the purpose, use, and service life of the conventional airborne weapon in general terms and list the cognizant field activities for the weapon and the manual. It shall also briefly describe the use of the manual, state for whom the manual is intended, and cite the general and detailed specifications, including dates, to which the manual has been prepared. An explanation shall be included indicating the identification of maintenance actions requiring entries in the weapon log book. A statement, indicating that conflicting information contained in the manual or recommendations proposing changes to the manual shall be covered by Technical Publication Deficiency Report (OPNAV Form 4790/66) in accordance with OPNAVINST 4790.2, shall be included in the introduction.

3.7.1.1 Safety. The introduction shall provide a brief discussion of hazards to the weapon (for example RADHAZ) likely to be encountered while transporting, storing, assembling, testing, and servicing the weapon and components, and preventive safety procedures for handling the weapon, including the use of protective equipment and clothing. Where specific tests or functions could be dangerous, warnings and cautions shall be inserted in accordance with MIL-M-81927.

3.7.2 Description. This shall include descriptive data required to familiarize the technician with the weapon in all authorized configurations. A tabular list of physical and functional characteristics shall be included (see figure 3).

3.7.2.1 Physical description. A brief physical description, such as length, diameter, width, weight, power requirements, etc shall be prepared. Lift support points shall be identified. The description shall be no more detailed than the level of replaceable parts established by the maintenance plan and provisioning documentation for the weapon. Supporting illustrations may include exploded, phantom, or cutaway views (see figures 4 and 5) of the weapons and components, utilizing the same artwork as the illustrated parts breakdown (IPB), when possible.

3.7.2.2 Principles of operation. This shall include a guide for the technician to understand the functional description of the weapon and its components. Block, schematic, and logic diagrams should be used to the extent necessary for understanding the principles of operation.

3.7.2.3 Weapon configurations. (See figure 6). A tabulation of all configurations of the weapon or the weapon types shall be prepared. Each configuration shall be illustrated for identification purposes. Where minor configuration difference exists, a single illustration with differences noted by callouts, details, etc. may be prepared.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:36Z
Check the source to verify that this is the current version before use.

3.7.3 Support equipment maintenance. This WP, when required, shall include maintenance instructions for peculiar support equipment when separate maintenance manuals or maintenance requirements cards (MRC) are not procured. The support equipment shall be described and illustrated, including control identification(switches, dials, etc) and mechanical and electrical interface locations. Concise step-by-step procedures shall be included for proper care of the peculiar support equipment while in and out of service. These procedures shall cover the instructions for storage, shipment, disassembly/assembly, any lubrication or other servicing, operating checks, periodic inspection, and adjustment. The descriptive detail and maintenance information shall be consistent with the level of replaceable parts established by the maintenance material support plan for the peculiar support equipment.

3.7.3.1 Support equipment fabrication. Instructions shall be included for the local fabrication/assembly of peculair tools and cables, when such fabrication/assembly is approved by the procuring activity. Materials, dimensions, wire size, color coding, pin to pin hookup, and peculair processing shall be fully identified.

3.7.4 Preparation for use. This shall include step-by-step procedures necessary to prepare the weapon for use, including unpacking, inspection, and assembly. Criteria for accepting or rejecting components and authorized remedies for correcting deficiencies shall be included.

3.7.4.1 Unpacking. Instructions shall include checking environmental indicators and depressurizing shipping containers, depalletizing, uncrating, and uncanning the weapon or components; and depreserving, such as removal of protective covers and coatings peculiar to the weapon or components.

3.7.4.2 Inspection. This shall include procedures for all visual, electrical, electronic, anc mechanical inspections, checks, and tests of the weapon and components to certify them ready for assembly. Specific conditions that might occur shall be included, such as indications of rough handling, corrosion, fungus, mold, loose or punctured weather seal or motor nozzle, and damaged wiring or threads, soldering, structural framing, and locking devices.

3.7.4.3 Assembly. Detailed instructions for the assembly of components, such as fuses and fins, to build up the complete weapon shall be included. Fusing procedures shall be included only if authorized during weapon build up. Use of service approved corrosion-preventive compounds, special lubricants, and gasket pastes shall be covered. Procedures involving hazards to personnel shall be thoroughly described and highlighted by warnings in accordance with MIL-M-81927. Procedures shall be included for any adjustments required during assembly.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:36Z
Check the source to verify that this is the current version before use.

continued safe flight and landing of the airplane is extremely

3.7.4.4 Post assembly. Procedures for visual, electrical, electronic, and mechanical checks and test of the complete weapon prior to placing it in a magazine or delivering it for loading on an aircraft shall be included. Instructions relative to log book entries, forms to be completed, and applicable records shall be included.

3.7.5 Organizational maintenance. This shall cover organizational level maintenance procedures, including inspection, cleaning, corrosion control, and lubrication if MRC's are not procured for the weapon or the requirements and procedures are not contained in applicable aircraft maintenance instruction manuals or MRC's. Installation and removal of the weapon from the aircraft and installed test procedures shall not be included.

3.7.6 Intermediate maintenance. Procedures shall be included for the maintenance of the weapon and its components at the intermediate level. Instructions for preliminary inspection and checkout of the weapon upon receipt at intermediate level shall be included. It shall consist of a visual inspection of the weapon for damage, corrosion, and other defects. Tests shall contain instructions for accomplishing checks necessary to ensure the weapon and its components are performing properly. Tests shall give minimum standards of performance along with permissable tolerances. Meter readings and other values shall be included, when applicable, to provide the technician with the desired results for each procedural step. Illustrations of test setups and test equipment indications shall be included, as required.

3.7.7 Depot maintenance. When required by the maintenance plan, procedures for depot level maintenance of the weapon and its components shall be included. The depot level maintenance material shall supplement intermediate level instructions to the extent necessary to support the depot maintenance requirements. Information shall be included to the authorized depth in accordance with the maintenance plan for the weapon. Data shall be included to enable depot activities to determine when components, assemblies, and subassembles require only specified maintenance, or when they shall be completely overhauled. Depot level limits, tolerances, and standards, and special repair and disassembly/assembly instructions shall be included.

3.7.8 Illustrated parts breakdown. When spare parts are provisioned for the weapon, an IPB shall be prepared in accordance with MIL-M-81929. When prepared as part of a WP, the IPB shall follow the maintenance instructions to which it applies. When prepared as a separate WP, the IPB shall follow the maintenance WP to which it applies. The introduction to the IPB shall be included in the introduction to the manual and shall not be repeated in the WP that include the IPB.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:36Z
Check the source to verify that this is the currentversion before use.

3.7.9 Handling and Storage. This shall include procedures peculiar to the weapon for handling and storage. It shall include methods of packaging and palletizing, and correlate components with shipping containers. Storage requirements, such as temperature, humidity, and grounding shall be included, as necessary. Reference shall be made to publications on storage, handling, and palletizing for specific information on the weapon to minimize duplication or conflicting information.

3.7.9.1 When the procedures for shipboard and shorebased handling and storage are the same, or contain minor differences, the coverage shall be titled "Handling and Storage" and a statement included to indicate that the procedures for shipboard and shorebased are the same; the minor differences shall be appropriately identified.

3.7.9.2 When the procedures are significantly different between shipboard and shorebased handling and storage, separate WP's or paragraphs for each shall be prepared and appropriately titled.

3.7.10 Emergency. This coverage shall contain information and procedures relative to emergencies involving the weapon. Information for emergency procedures shall be provided by the procuring activity. The following information shall be provided (see 6.2.1):

a. Render safe and disposal. This shall include emergency procedures concerning the weapon that can be performed by ordnance personnel, prior to arrival of explosive ordnance disposal (EOD) personnel, to alleviate or eliminate a hazardous condition that, if unabated, could lead to serious injury, loss of life, or destruction of property.

b. Any peculiar fire fighting.

c. Tabulation of cookoff times and personnel evacuation distance for weapons involved in fire (see table I).

d. Accidents or incidents involving dropping, collision, or inadvertent release of weapon.

e. Effects of weapon exposure to adverse weather conditions.

f. If a hangfire exits, when the armament equipment is removed from an aircraft in a loaded condition, procedures shall be included for the personnel discovering the hangfire.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:36Z
Check the source to verify that this is the current version before use.

Table I. Cookoff times and evacuation distances.

Nomenclature	Cookoff time	Personnel evacuation distance
BLU-1/B Fire Bomb	Not applicable	500 feet
WARNING Personnel will remain clear of the area to the fore and aft of the rocket, as personnel can be injured from the rocket or rocket blast.		
Rocket, HE 5-inch	5 minutes	2000 feet
Rocket, GP 5-inch	5 minutes	1500 feet

3.7.10.1 Emergency page markings. Pages containing emergency information shall have a broken black border in accordance with the requirements of figure 7.

4. QUALITY ASSURANCE PROVISIONS.

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Contractor inspection. Material furnished in accordance with this specification shall be inspected by the contractor for conformance to the applicable requirements herein.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:36Z
Check the source to verify that this is the currentversion before use.

4.3 In-process review, validation, and verification. In-process reviews, validation, and verification of technical manuals prepared to the requirements of this specification shall be as directed by the requiring activity and in accordance with MIL-M-81203 and NAVAIR 00-25-600 (see 6.2.1).

5. PACKAGING.

5.1 Material prepared in accordance with this specification shall be packaged in accordance with MIL-M-81927.

6. NOTES.

6.1 Intended use. The technical manuals are intended for use by ordnance personnel for assembly, inspection, checkout, and handling of conventional airborne weapons.

6.2. Ordering data.

6.2.1 Procurement requirements. Procurement documents should specify the following:

a. Title, number, and date of this specification.
b. GFE and vendor procured coverage required (see 3.1).
c. Nomenclature requirements (see 3.4.1).
d. When a multi-weapon manual is required (see 3.5.1).
e. Alternate identification of material is required (see 3.6.2).
f. Information for emergency procedures (see 3.7.10).
g. Quality assurance provisions required (see 4.3).

6.2.2 Data requirements. When this specification is used in a procurement which incorporates a DD Form 1423 and invokes the provisions of Defense Acquisition Regulations (DAR), the data requirements identified below will be developed as specified by an approved data item description (DD Form 1664) and delivered in accordance with the approved contract data requirements list (DD Form 1423) incorporated in the contract. When the provisions of DAR are not invoked, the data specified below will be delivered by the contractor in accordance with the contract requirements. Deliverable data required by this specification is cited in the following paragraph:

Paragraph	Data requirement	Applicable DID
3.2	Airborne weapon maintenance data	UDI-M-21368

(Copies of the DID required by the contractor in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:36Z
Check the source to verify that this is the current version before use.

6.3 Source data. Upon request, the requiring activity should assist the contractor in collecting source data, such as:

a. Item descriptions

b. Illustrations

c. Safety data

d. Fuzing data necessary for correlation of weapon assembly procedures.

e. Ground handling instructions

f. Arming wire installation

g. Peculiar support equipment

h. Peculiar lockwiring and sealing procedures

i. Weapon assembly checks

j. Emergency information

k. Packaging information

6.4 Definition.

6.4.1 Conventional airborne weapons. Airborne weapons or weapon components (e.g. bombs, rockets, ammunition, pyrotechnics) that are not normally aircraft inventory items and do not carry nuclear devices.

6.5 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue, due to extensiveness of the changes.

6.6 Specification figures. The figures provided in this specification are intended to illustrate methods of technical data presentation. They shall not be interpreted as limiting the technical content requirements that are established by the text matter to which the figures apply.

6.7 Requiring activity. The organization of a using military service or that organization delegated by a using service, which is responsible for the selection of, and determination of requirements for a specific support element.

Preparing activity:
NAVY (AS)

(Project TMSS-N145)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:36Z
Check the source to verify that this is the current version before use.

AW-042XX-XXX-000

DESCRIPTION, PREPARATION FOR USE, AND HANDLING INSTRUCTIONS ROCKET MOTOR MARK 54 MOD 0 (M437)

Reference Material

Ammuntion Afloat	NAVSEA OP 4
Ammunition and Explosives Ashore	NAVSEA OP 5

Alphabetical Index

Subject	Page No.
Description	1
Handling	8
Identification	3
Inspection	4
Introduction	1
Post-assembly	6
Preparation for Use	4
Principles of Operation	2
Service Life	1
Shipping	8
Storage	9
Unpacking	4

Record of Applicable Technical Directives

NONE

1. INTRODUCTION.

2. The purpose of the Rocket Motor MK 54 Mod 0 is to supplement the upward thrust of the ejection gun of Martin-Baker MK F7 series ejection seats used in F8 series aircraft.

3. SERVICE LIFE.

WARNING

When an aircraft containing the rocket motor is to be deployed for an extended period of time in areas that do not permit ready replacement of the rocket motor, verify that the remaining service life of the rocket motor exceeds the period of deployment.

5. DESCRIPTION.

6. The leading physical and functional characteristics of the Rocket Motor MK 54 Mod 0 are shown in Table 1.

7. The Rocket Motor MK54 Mod 0 is a self-contained, mechanically initiated, solid-propellant rocket. The rocket motor (figure 1) consists of center body, propellant tubes, nozzles, igniter firing mechanism tube, firing mechanism. The center body is machined internally to form an exhaust chamber and is drilled and threaded to accept 10 propellant tubes, six nozzles, and one firing unit tube. An extension arm with a cam follower is attached to the rear of the center body. An internally threaded bushing is welded to each end of the center body to enable attachment of the rocket motor to the ejection seat.

FIGURE 1. Example of a WP title page for multi-mark manual.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:36Z
Check the source to verify that this is the currentversion before use.

22. INTERMEDIATE MAINTENANCE.

Support Equipment Required

Part Number	Nomenclature
101-5CFG	Igniter Circuit Tester

Materials Required

Specification Number	Nomenclature
TT-E-516	Lusterless Enamel
TT-T-548	Toluene
MIL-P-8585	Zinc Chromate Primer

23. Intermediate Maintenance of the rocket motor is limited to touch up paint on the rocket motor exterior and igniter circuit continuity check.

24. PAINT FINISH. The painted finish of the rocket motor serves to protect the underlying metal from corrosion. If the paint shows evidence of damage such as scratches, chips, loss of adhesion, etc., refinish as follows:

a. Feather edges of the damaged paint with number 400 or finer sandpaper.

b. Clean the affected area with a clean, lint-free cloth moistened with clean toluene (TT-T-548).

c. Immediately wipe dry with a clean, dry, lint-free cloth.

NOTE

Do not allow the toluene film to evaporate on the surface of the motor because it will prevent proper adhesion of the paint.

d. Apply a coat of zinc chromate primer (MIL-P-8585) to cover the affected area and allow to dry for 1-1/2 hours minimum at approximately 70°F (21°C).

25. IGNITER CIRCUIT CONTINUITY CHECK. A continuity test shall be performed on any igniter that was received in an opened or damaged container. Using an Igniter Circuit Tester (101-5CFG), equipped with test leads (figure 4), perform the continuty test as follows:

WARNING

The igniter is a Class B explosive; handle with care and observe all existing service regulations governing the handling of explosive ordnance.

Clear all unathorized personnel from the continuity test area. The work area must be NAVAIR SYSCOM - approved and include a suitable barrier or isolated cell and shall meet the requirements for protection against hazards of electromagnetic radiation as specified in MIL-STD-1385.

The igniter circuit continuity shall not be checked while the igniter is installed in the rocket motor.

a. Move the igniter to the test area.

b. Check the Igniter Circuit Tester current output in accordance with WP 004 00.

c. Check the Igniter Circuit Tester resistance accuracy in accordance with WP 004 00.

d. Connect a test lead to each terminal (3) of Igniter Circuit Tester.

e. Short the test leads alligator clips together.

f. Set the OHMS ADD switch (5) to 0 and the MULTIPLIER switch (6) to X1.

FIGURE 2. Example of support equipment and materials required lists.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:36Z
Check the source to verify that this is the current version before use.

Table 1. Physical and Functional Characteristics of Rocket Mk

Characteristics	Mods 1 and 2
Physical:	
Length	54.31 inches
Diameter	9.42 inches
Weight	
Before firing	225 pounds
After firing	111 pounds
Storage temperature limits	-30°F (-34°C) to +140°F (+60°C)
Department of Transportation Classification	
Rocket Motor	Class B explosive
Igniter	Class B explosive
Functional:	
Firing temperature limits	-30°F (-34°C) to +140°F (+60°C)
Minimum firing circuit voltage	24 volts dc
Firing current	25 amperes
Maximum safe no-fire current	0.04 ampere
Igniter circuit resistance	0.25 ±0.06 ohm
Maximum ignition interval	0.230 second
Safe operating range	-30°F (-34°C) to +140°F (+60°C)
Auto ignition temperature	+530°F (+277°C)
Nominal thrust	4,500 pound at +60°F (+16°C)
Nominal propellant burning time	5.4 seconds at +60°F (+16°C)
Nominal total impulse	24,050 pound-seconds at +60°F (+16°C)

FIGURE 3. Example of a characteristics table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:36Z
Check the source to verify that this is the current version before use.

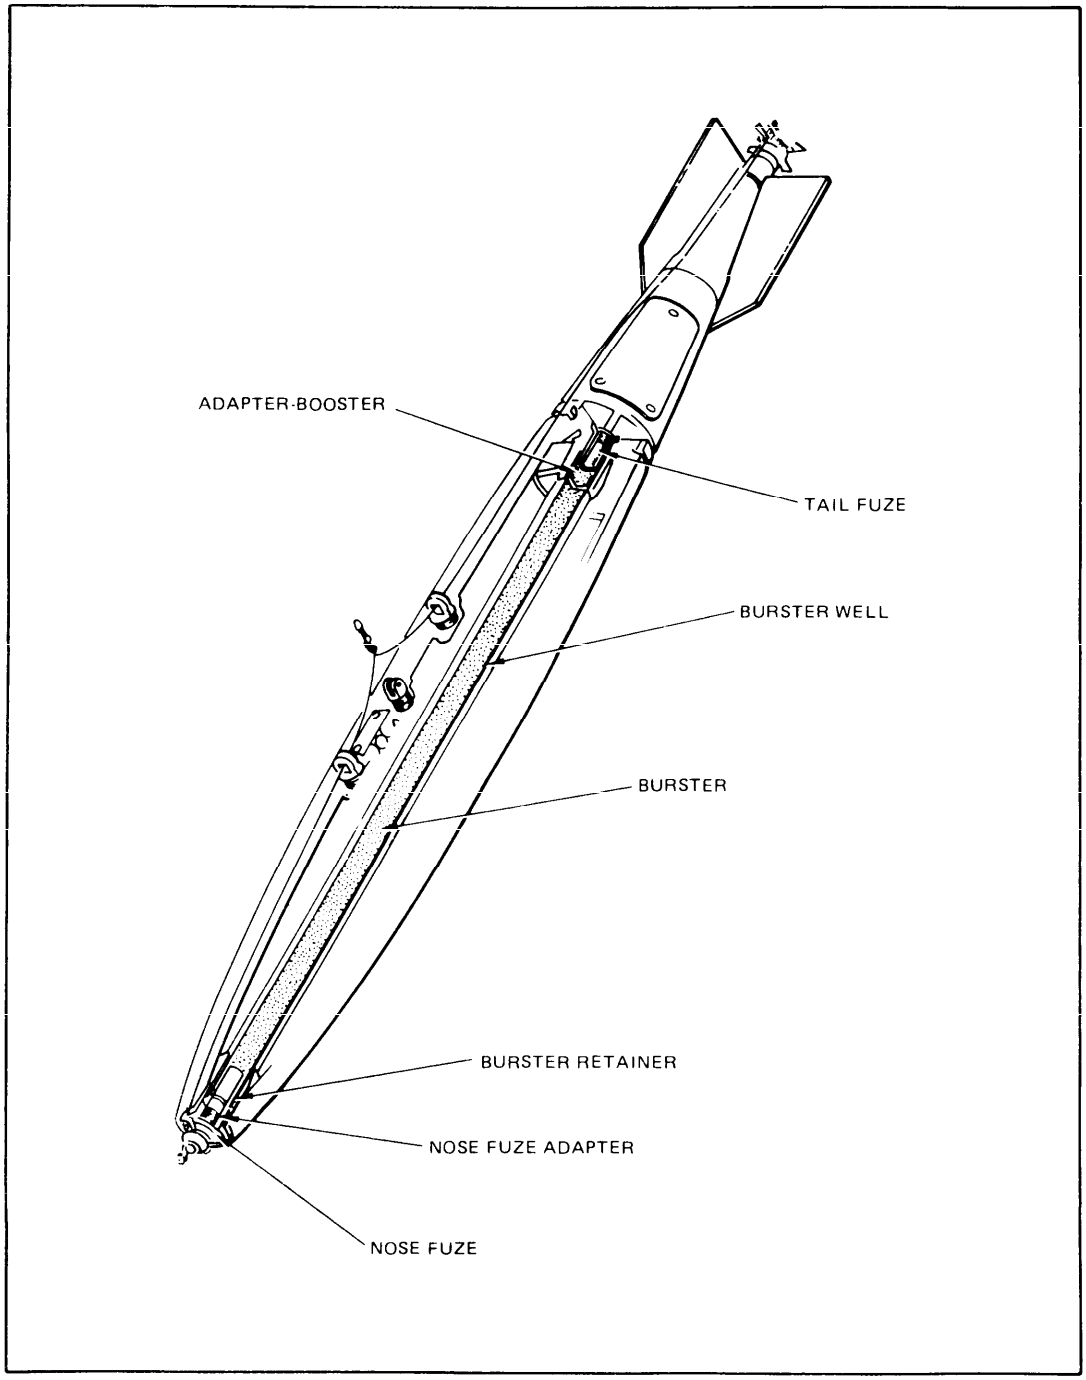


FIGURE 4. Example of a weapon cutaway view.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:36Z
Check the source to verify that this is the current version before use.



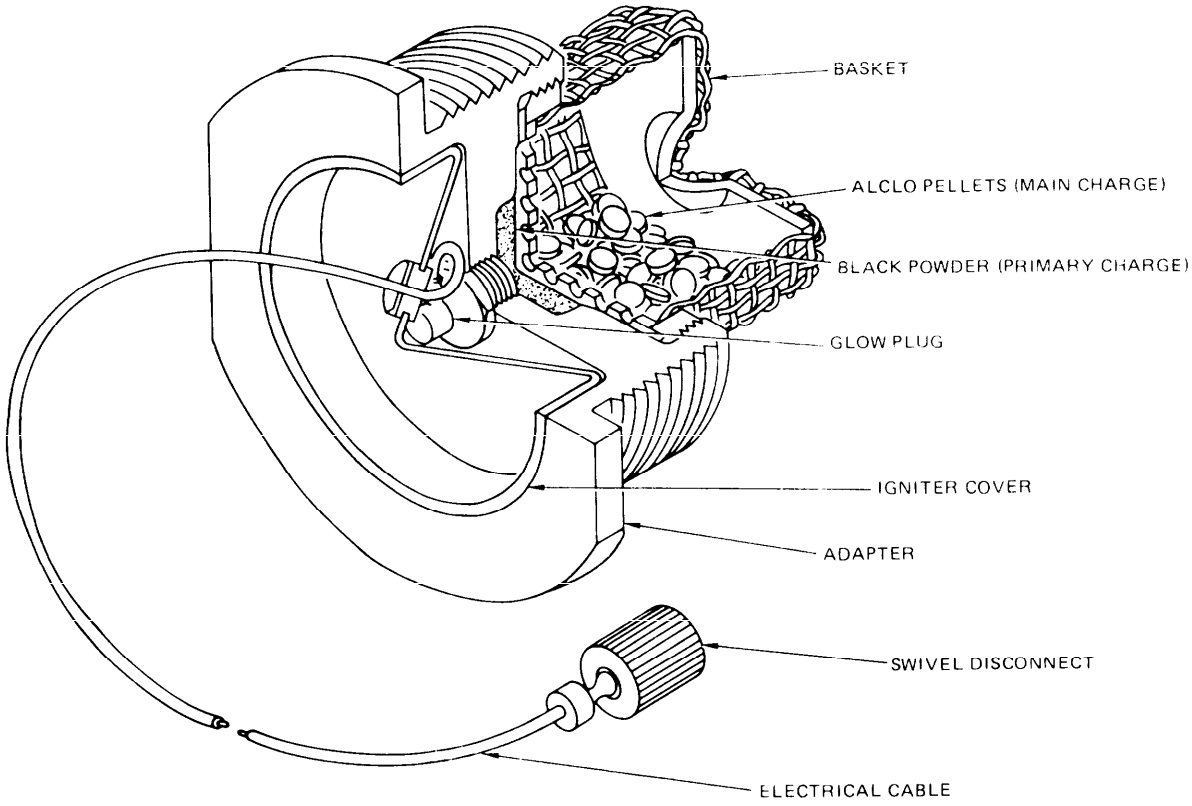


FIGURE 5. Example of a weapon component cutaway view.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:36Z
Check the source to verify that this is the current version before use.

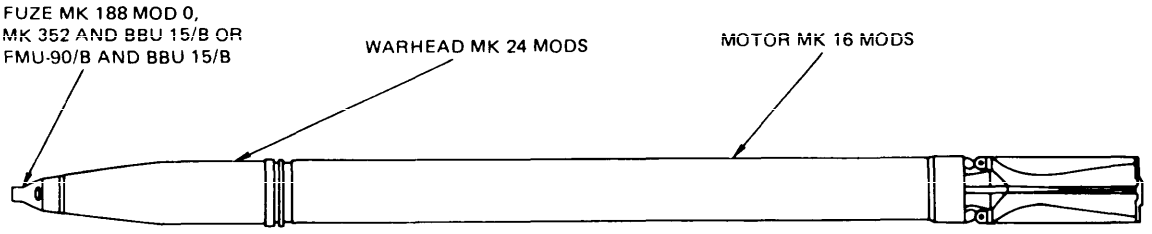


5.0-Inch FFAR GP Configuration (Mk 16 Motor, Mk 24 Warhead, Mk 188 Fuze, Mk 352 with Adapter Booster BBU 15/B or FMU-90/B with Adapter Booster BBU 15/B)

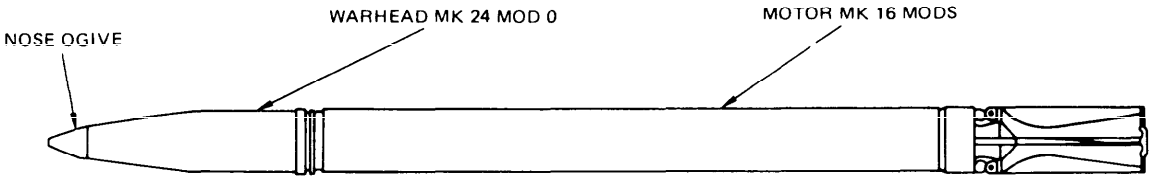

5.0-Inch FFAR GP Configuration (Mk 16 Motor, Mk 24 Warhead, Nose Ogive)

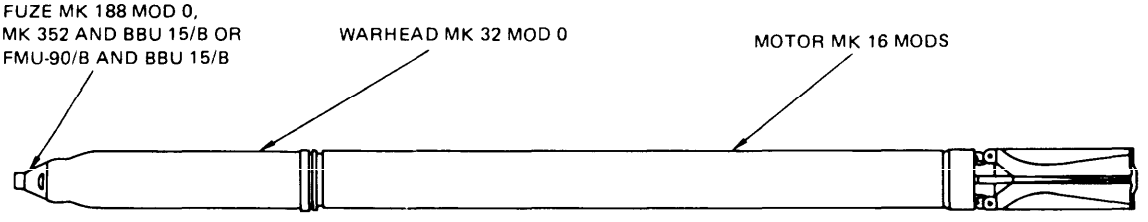


5.0-Inch FFAR AT/APERS Configuration (Mk 16 Motor, MK32 Warhead, Mk 188 Fuze, Mk 352 with Adapter Booster BBU 15/B or FMU-90/B with Adapter Booster BBU 15/B)

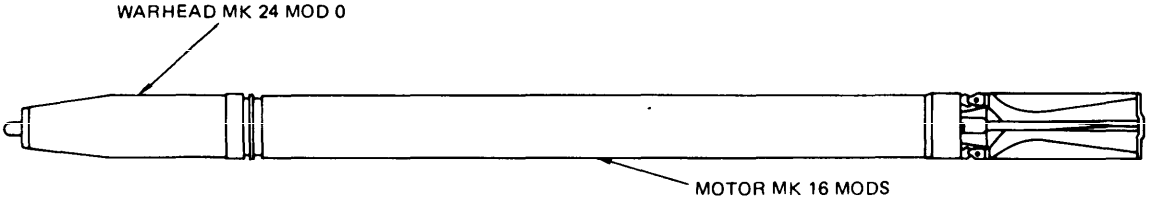

5.0-Inch FFAR Practice Configuration (Mk 16 Motor, Mk 24 Warhead, Nose Plug)

FIGURE 6. Example of weapon configurations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:36Z
Check the source to verify that this is the current version before use.

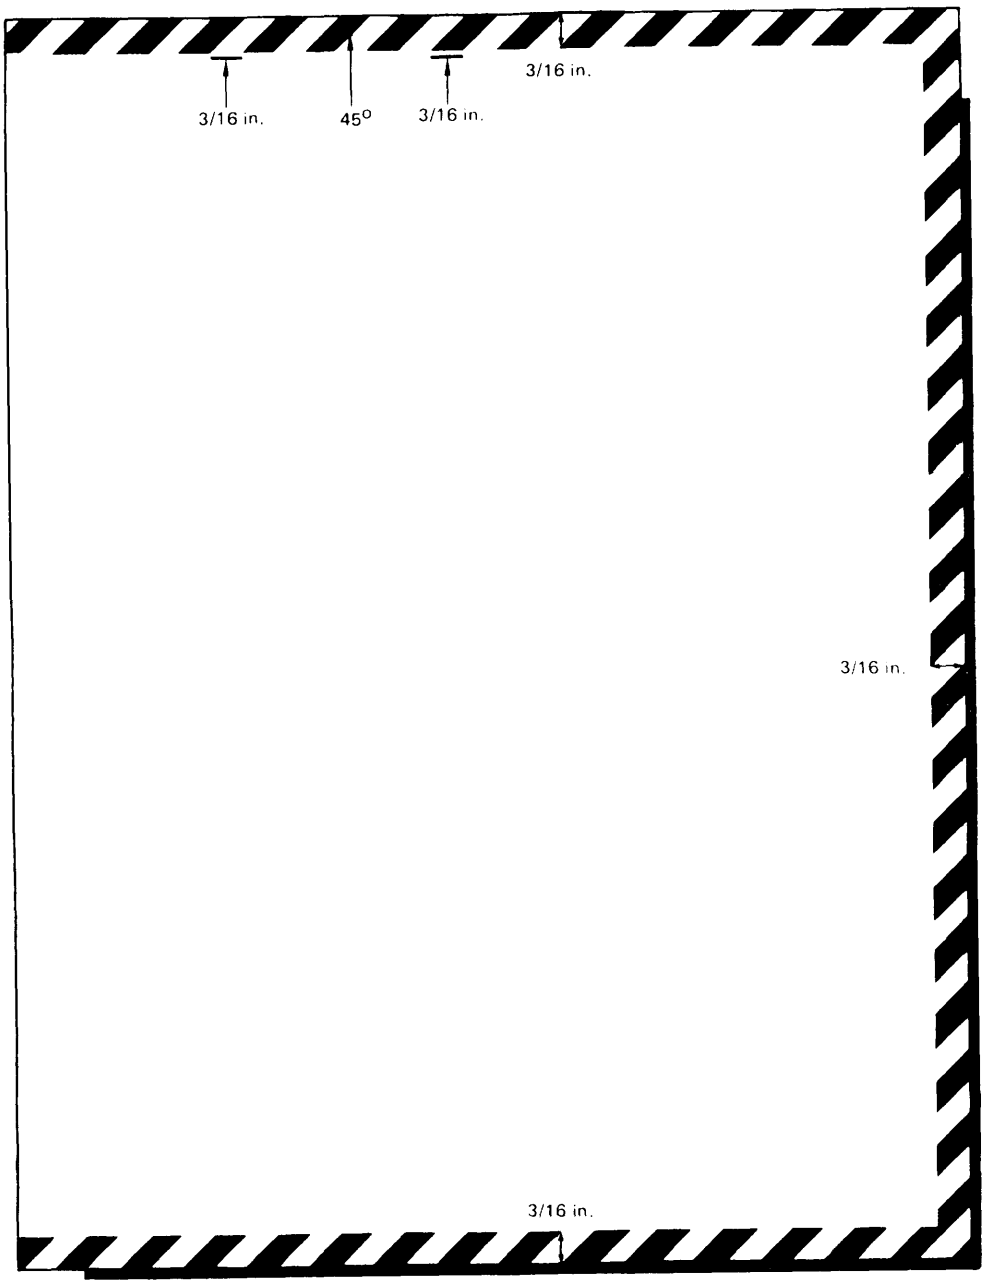

NOTES

COLOR - Black
PLACE - Three Unbound Edges
BORDER - 3/16 Inch Wide
MARKING - 3/16 Inch Wide
ANGLE OF MARKING - 45 Degrees
SPACE BETWEEN MARKINGS - 3/16 Inch Wide

FIGURE 7. Example of emergency page markings.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:36Z
Check the source to verify that this is the current version before use.

ALPHABETICAL INDEX

A

Alternate items 3.6.1.1
Applicable documents 2
Arrangement 3.5
Assembly 3.7.4.3

C

Changes from previous issue 6.5
Color code reference 3.4.2
Conflict between specifications 3.3
Contractor inspection 4.2
Conventional airborne weapons 6.4.1

D

Data 3.2
Data requirements 6.2.2
Definition 6.4
Depot maintenance 3.7.7
Description 3.7.2

E

Emergency 3.7.10
Emergency page markings 3.7.10.1

G

General 3.1

H

Handling and storage 3.7.9

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:36Z
Check the source to verify that this is the current version before use.

I

Illustrated parts breakdown 3.7.8
In-process review, validation, and verification 4.3
Inspection 3.7.4.2
Intended use 6.1
Intermediate maintenance 3.7.6
Introduction 3.7.1
Issue of documents 2.1

L

Log book entries 3.6.3

M

Manner of preparation 3.4
Materials required 3.6.2
Multi-weapon manual 3.5.1

N

Nomenclature 3.4.1
Notes 6

O

Ordering data 6.2
Organizational maintenance 3.7.5

P

Packaging 5
Physical description 3.7.2.1
Post assembly 3.7.4.4
Preparation for use 3.7.4
Principles of operation 3.7.2.2
Procurement requirements 6.2.1

Q

Quality assurance provisions 4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:36Z
Check the source to verify that this is the current version before use.

R

Requirements 3
Requiring activity 6.7
Responsibility for inspection 4.1

S

Safety 3.7.1.1
Scope 1, 1.1
Source data 6.3
Specification figures 6.6
Storage 3.7.9
Support equipment fabrication 3.7.3.1
Support equipment maintenance 3.7.3
Support equipment required 3.6.1

T

Technical content - detailed 3.7
Technical content - general 3.6

U

Unpacking 3.7.4.1

V

Validation 4.3
Verification 4.3

W

Weapon configurations 3.7.2.3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:36Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:36Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE: MIL-M-81702B(AS) MANUAL, TECHNICAL, AIRBORNE WEAPONS (CONVENTIONAL) REQUIREMENTS FOR

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:36Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID



OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commanding Officer
Naval Air Engineering Center
Engineering Specifications and Standards Department (ESSD)
Code 93
Lakehurst, NJ 08733

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:36Z
Check the source to verify that this is the current version before use.