MILITARY SPECIFICATION

PLATES, AUTOMOBILE, INDIVIDUAL: METAL; EMBLEM, AND STAR (COMMANDANT'S AND GENERAL OFFICER'S, USMC)

This specification is approved for use by the U. S. Marine Corps, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers requirements for metal individual automobile plates and attachable metal emblem and stars.

1.2 Classification. Individual automobile plates shall be of the following types, as specified (see 6.2).

Type I - Plate, Automobile, Individual: Metal (Commandant's USMC)
Type II - Plate, Automobile, Individual: Metal (General Officer's, USMC)

Emblem and stars shall be furnished as specified (see 6.2).

2. APPLICABLE DOCUMENTS

2.1 Goverment documents.

2.1.1 Specifications, standards, and handbooks. Unless otherwise specified, the following specifications, standards, and handbooks of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation form a part of this specification to the extent specified herein.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to the Commandant of the Marine Corps (LMA-1), Headquarters, U. S. Marine Corps, Washington, DC 20380, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 202610-19T06:17Z
Check the source to verify that this is the currentversion before use.

SPECIFICATIONS

FEDERAL

FF-N-845	Nut, Plain, Wing, Inch and Metric
QQ-C-320	Chromium Plating, Electrodeposited
QQ-S-698	Steel, Sheet And Strip, Low Carbon
QQ-S-763	Steel Bar, Wire, Shape And Forging, Corrosion Resisting.
QQ-Z-363	Zinc Base Alloy, Die Casting
TT-E-489	Enamel, Alkyd, Gloss, (For Exterior And Interior Surfaces).

STANDARDS

FEDERAL

FED-STD-H28	-Screw Thread Standards for Federal Services
FED-STD-151	-Metals; Test Methods.
FED-STD-595	-Color.

MILITARY

MIL-STD-105	-Sampling Procedures And Tables For Inspections By Attributes.
MIL-STD-129	-Marking For Shipment And Storage.

(Copies of specifications, standards, handbooks, drawings, and publications required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein.

LAWS AND REGULATIONS

U. S. Postal Service Manual

(Application for copies should be addressed to the Superintendent of Documents, U. S. Government Printing Office, Washington, DC 20402.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. The issues of the documents which are indicated as DOD adopted shall be the issue listed in the current DODISS and the supplement thereto, if applicable.

UNIFORM CLASSIFICATION COMMITTEE

Uniform Freight Classification Rules

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:17Z
Check the source to verify that this is the current version before use.

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Association Inc., Tariff Order Section, 1616 P Street, N.W., Washington, DC 20036.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 Standard sample. A standard sample is furnished solely for guidance and information to the contractor (see 6.3). Variation from the specification may appear in the sample, in which case the specification shall govern.

3.2 First article. Unless otherwise specified (see 6.2), before production is commenced, a finished plate of each type being procured, an emblem and a star shall be submitted, or made available, to the contracting officer or his authorized representative for approval. The approval of the first article authorizes the commencement of production, but does not relieve the contractor of responsibility for compliance with all applicable provisions of the specification. The first article shall be manufactured by the contractor in the same facilities to be used for the manufacture of the production items.

3.3 Materials.

3.3.1 Plates.

3.3.1.1 Steel. Plates shall be made from 14-gage (nominal 0.075 inch) hot rolled commercial quality or cold rolled commercial quality sheet steel in accordance with QQ-S-698.

3.3.1.2 Enamel. Enamel for the plates shall conform to TT-E-489. The colors of the enamel shall be white No. 37875 and red No. 21105 of FED-STD-595.

3.3.2 Emblem and star.

3.3.2.1 Casting. The emblem shall be cast from either nickel silver or bronze, and shall conform to requirements shown in Table I when tested as specified in Section 4, Table II. The star shall be cast from zinc aluminum alloy and tested in accordance with QQ-Z-363.

Table I. Chemical composition

Alloy	Copper	Nickel 1/	Lead (max)	Iron (max)	Manganese (max)	Zinc	Others
Bronze	89.0-91.0	--	.05	.05	--	Remainder	.13
Nickel-silver	63.0-66.5	16.5-19.5	.10	.25	.50	Remainder	--

1/ Cobolt counting as nickel.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:17Z
Check the source to verify that this is the current version before use.

3.3.2.2 Plating material. The emblem shall be plated with nickel and rhodium; the star shall be plated with a copper plate, a nickel plate and a chrome finish.

3.3.3 Screw posts, nuts, and washers. Screw posts, wing nuts, flat washers, and lock washers shall be made from corrosion resistant steel conforming to classes FS 302, 303, or 304 of QQ-S-763; alternately screw posts may be made from any type commercial brass which is rhodium or cadmium plated; or brass commercial wing nuts which are cadmium plated and have a nylon insert may be used. The screw post shall be 3/4 ± 1/32 inch long and threaded for a minimum length of 1/2 inch. The threads shall be No. 10-24 UNC-2A in accordance with FED-STD-H28. The wing nut shall be No. 10-24-UNC-2B in accordance with type A, style 2 of FF-N-845. All screw posts shall be provided with a flat washer, lock washer and wing nut.

3.4 Design and construction. The plates, emblem and star shall be made of the materials specified herein and constructed to include the components and construction details shown on Figures 1, 2 and 3 and specified herein. After fabrication, the surfaces of the plates shall be visibly flat, and free from surface recesses, protrusions, or other imperfections which might affect the smoothness, appearance, or serviceability of the enamel. All edges of the plate (including the holes), star and emblem shall be trimmed so as to be clean, smooth and free from drag and step.

3.4.1 Plate construction. Before painting, the plates shall be clean, and all surfaces and edges shall be smooth and free of sharp corners. The plates shall be surface primed with the white paint and enameled with the red paint specified in 3.3.1.2. All surfaces and edges of the plates shall be completely and evenly coated with the paint in such a manner that a smooth uniform film will be produced. The film shall be uniform in color without objectionable orange peel, runs, wrinkles, drops, streaks, or areas of thin or no film, and shall be free of bubbles or foreign inclusions or other defects which may affect appearance or serviceability.

3.4.2 Emblem and star construction.

3.4.2.1 Molds. The emblem shall be cast in molds made from the standard model loaned to the contractor by the Government. The star shall be cast in molds made by the contractor. The finished emblems and stars shall be free of dents, nicks, scratches and other imperfections. The mold of the star, unless otherwise specified (see 6.2), shall remain the property of the contractor.

3.4.2.2 Screw posts. The screw post for the star shall be 3/4 ± 1/32 inch long embedded in the mold before casting and shall be centered and perpendicular to the back surface. The screw posts for the emblem shall be soldered to the casting, at the locations shown in Figure 3, with hard solder having a melting point not less than 1,075°F. Care should be taken to insure that the post is perpendicular to the back surface. All flux and excess solder shall be completely removed, and the joint shall be clean, strong, smooth and free from burned or reduced areas. Posts shall have a free length of 1/2 to 5/8 inch when measured from the back edge of casting to end of post.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:17Z
Check the source to verify that this is the current version before use.

3.4.2.3 Plating. The finished emblem castings, before plating, shall be free from pits, holes, and nicks, and properly buffed and polished to a mirror-like finish, degreased, and cleaned. Emblem castings shall be first plated with nickel, recleaned, and then plated with rhodium. All plating shall be continuous and nonporous with no indication of cut-through, blistering, or peeling. The nickel plating shall be not less than 0.0003 inch in thickness. The rhodium plating shall be not less than 1 gram per 1,000 square inches of surface. For the purpose of this specification, the emblem castings shall be considered properly plated when tested as specified in Section 4, Table III. The star casting shall conform to requirements specified in QQ-C-320.

3.4.2.4 Cork backing for star. Each star shall be provided with a cork backing, 1/16 inch minimum thickness. The backing shall be star shaped, measuring 1-5/8 to 1-3/4 inches from point to point and shall not extend beyond edges of the star. The cork shall be securely adhered to the back of the star with a water-resistant adhesive.

3.5 Government-loaned property. A standard model of the emblem will be loaned to the contractor by the Government. The Government furnished standard model shall be used only for making the contractor's working molds. Upon completion of the contract, the standard model shall be returned to a point designated by the contracting officer. The contractor shall be responsible for the loss, damage, or mutilation of the Government furnished standard model while in his possession. Determination of cost of replacing the lost, broken or damaged standard model shall be made by the Government. No alterations to the design shall be permitted.

3.6 Workmanship. The finished plates, emblem, and star shall conform to the quality of product established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality level (AQL).

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsiblity for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Certificate of compliance. When a certificate of compliance is submitted, the Government reserves the right to check test such items and determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.4).
2. Quality conformance inspection (see 4.5)

4.3 Inspection. Inspection shall be in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated herein.

Source: https://assist.dla.mil -- Downloaded: 202610-19T06:17Z
Check the source to verify that this is the current version before use.

4.4 First article inspection. When first article is required, inspection and tests shall be performed to determine conformance to all provisions of this specification.

4.5 Quality conformance inspection.

4.5.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be tested in accordance with all requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase documents. In addition, testing shall be performed on components listed in Table II for the characteristics shown. There shall be two determinations for each element per sample unit and the results shall be reported to the nearest 0.1 percent. The sample unit shall be a minimum of 8 ounces or equivalent for each alloy. The requirements are applicable to lot average and the inspection level shall be S-1.

Table II. Component testing.

Component	Characteristic	Requirement paragraph	Test method
Copper base alloy for emblems	Chemical composition	3.3.2.1	Method 111 or 112 of FED-STD-151

4.5.2 Certificate of compliance. Components and materials listed below may be accepted on the basis of a contractor's certification of compliance for characteristics indicated:

Component	Characteristic	Rqmt. para.
Screw post, nut and washer	Material identification, thread type and fit	3.3.3
Solder	Material identification	3.4.2.2
Cork backing, star	Material identification	3.4.2.4
Adhesive	Water resistant type	3.4.2.4

4.5.3 In-process inspection. Inspection shall be made at any point or during any phase of the manufacturing process to determine whether operation or assemblies are accomplished as specified herein. When a deviation is noted, a correction shall be made. Failure to make immediate correction shall be cause for rejection of affected end item lots. In-process inspection shall be conducted to see that accomplishment of the following is in accordance with specification requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:17Z
Check the source to verify that this is the current version before use.

s cited herein, the text of this specification and the reference

Requirement, operation, or assembly	Requirement paragraph
Cleaning of all surfaces prior to application of primer and enamel	3.4.1
Application of primer	3.4.1
Underplating of nickel	3.4.2.3

4.5.4 Examination of end item. The end item shall be examined for the defects listed in 4.5.4.1 and 4.5.4.2. The sample unit shall be one completely finished and assembled plate (with star and emblem) of each type, or shall be one star or one emblem, as applicable. All defects shall be as indicated below, except those with an asterisk (*) in the classification column, which shall be classified as follows:

Major defect - When seriously affecting appearance or serviceability.

Minor defect - When affecting appearance or serviceability but not seriously.

4.5.4.1 General defects. General defects shall be classified as follows:

EXAMINE	DEFECT	CLASSIFICATION		
		MAJOR	MINOR	
			A	B
Color and finish, plate	a. Color and shade do not match standard approved sample.	X		
	b. All surfaces not completely enameled.	X		
	c. Enamel not smooth, not continuous, not uniform or not adherent, i.e., peeling, runs, bubbles, wrinkles, drops, streaks, thin film.		*	
	d. Foreign matter embedded in finish i.e., lint, grit, or dust clearly noticeable.		*	
	e. Evidence of red rust.	X		
	f. Abraded, scuffed, scratched, scored, or otherwise damaged.		*	
Star and emblem	a. Color and finish do not compare favorably with standard or approved sample.	X		

Source: https://assist.dla.mil -- Downloaded: 202610-19T06:17Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECT	CLASSIFICATION		
		MAJOR	MINOR	
			A	B
	b. Discoloration, such as spot, stain, or speck.		*	
Quality of plating	a. Surface spotted or open grained, i.e., appearing as pitted, porous, or crystallized.	X		
	b. Any plated area cut through, not continuous, broken, peeling, pits, holes, nicks, blistered, or otherwise impaired.	X		
	c. Not plated or plating is not specified type.	X		
Design	Plate: Design not as specified.	X		
	Star and emblem:			
	a. Design details altered or obscured, or not conforming to Government model and Figure 3.	X		
	b. Any significant detail marred or reduced.		*	
	c. Warp, twist, or distortion, producing irregular surface contour or outline.		*	
Construction and workmanship	a. Finish edges of plate are not square.		*	
	b. Surfaces or edges not clean, not smooth, or not free from burrs, roughness, sharp edges, drag, step, or tool marks.		* *	
	c. Plate not flat, i.e., distorted, bent, twisted or warped.		*	
	d. Required operation omitted or not accomplished as specified, e.g., any hole missing, not round or specified size.	X		

Source: https://assist.dla.mil -- Downloaded: 202610-19T06:17Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECT	CLASSIFICATION		
		MAJOR	MINOR	
			A	B
	e. Plate broken, fractured, or cracked.	X		
	f. Any component missing, i.e., wing nut or washers.	X		
	g. Posts are bent or not centered, or not perpendicular to back of emblem or star.	X		
	h. Post is loose.	X		
	i. Threads of post or wing nut stripped or damaged, or not specified size, type or fit.	X		
	j. Screw post for star is not securely embedded.	X		
	k. Cork backing for star omitted.	X		
	l. Cork backing for star is not adhered to the star.	X		
	m. Adhesive for securing cork backing to star is not water resistant.	X		
Soldering	a. Joint not clean and not smooth, i.e., flux or excess solder not removed.		*	
	b. Metal burned or reduced in soldering.		*	
	c. Solder spatter.		*	
	d. Post not completely joined by solder.	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:17Z
Check the source to verify that this is the current version before use.

4.5.4.2 Examination of plate, star and emblem for dimensions. Any dimension which is not within the tolerances specified in Figures 1, 2, and 3 shall be classified as a defect.

4.5.5 Inspection levels and AQL's. The inspection levels and AQL's expressed in defects per hundred units (DHU) shall be as follows:

	AQL	Inspection Level
For paragraph 4.5.4.1		
Major	2.5 DHU	II of MIL-STD-105
Total (Major and Asterisk combined)	10.0 DHU	II of MIL-STD-105
For paragraph 4.5.4.2		
One class	4.0 DHU	S-1

4.5.6 Examination of preparation for delivery requirements. An examination shall be made to determine compliance with packaging, packing and marking requirements of this specification. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 DHU.

Examine	Defect
Markings (exterior and interior)	Omitted, incorrect, illegible, of improper size, location, sequence or method of application.
Materials	Any component missing. Any component damaged, affecting serviceability. Plates not individually wrapped in kraft paper.
Workmanship	Inadequate application of components, such as incomplete closure of container flaps. Inadequate closure of overwrap or kraft paper not sealed with tape.
Weight and content (exterior and interior)	Number of intermediate packages is more or less than required; gross/net weight exceeds requirements.

4.6 Tests. First article testing shall be in accordance with Tables II and III and end item testing of the completely fabricated plate and emblem shall be in accordance with Table III for the characteristics shown herein.

4.6.1 Test for continuity of rhodium plating. Test samples of rhodium-plated emblems shall be immersed for 10 minutes in a solution of liver of

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:17Z
Check the source to verify that this is the current version before use.

Table III. Test Methods.

Characteristics	Rqmt. para.	Test Method	Rqmt spl unit	Appl to lot avg	# Det per spl unit	Results rptd as	Spl unit	Insp level	AQL
Nickel plating thickness (emblem)	3.4.2.3	Std Com'l		X	2	To nearest 0.00001 inch	1 emblem	S-1	NA
Continuity of rhodium plating (emblem)	3.4.2.3	4.6.1	X		1	Pass or fail	1 emblem	S-1	6.5

Source: https://assist.dla.mil -- Downloaded: 2026-04-19T06:17Z
Check the source to verify that this is the current version before use.

sulfur (2 percent potassium sulfide and 96 percent water by weight) at a temperature of 100°F ± 10°F. After removal, the samples shall be washed clean in water and examined. There shall be no perceptible change in brightness on the plated surfaces, except along the outside edge there may be a slight darkening.

5. PACKAGING

5.1 Packaging. Packaging shall be level A or commercial as specified (see 6.2).

5.1.1 Level A. Plates shall be individually wrapped in kraft paper sealed with gummed kraft paper tape. Emblems and stars, equipped with a flat washer, a lock washer, and a wing nut mounted on each screw post, shall be individually wrapped with fleece-backed paper and packaged in individual paperboard containers suitable for the purpose.

5.1.2 Commercial. Plates, emblems, and stars shall be packaged in accordance with the industry's practice.

5.2 Packing. Packing shall be commercial.

5.2.1 Commercial. Plates of one type only and emblems and stars, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination. Containers shall be in accordance with Uniform Classification Rules, National Motor Freight Classification Rule and U. S. Postal Services Manual, as applicable.

5.3 Marking. In addition to any special marking required by the contract or order, the inner containers and shipping containers shall be marked in accordance with the requirements of MIL-STD-129.

5.3.1 Nomenclature. The item identification nomenclature shall be marked as follows on inner containers and shipping containers:

Type I Plate:	PLATE, AUTOMOBILE, INDIVIDUAL: metal; red background; lg 9-1/2 in., w 7-1/2 in.
Type II Plate:	PLATE, AUTOMOBILE, INDIVIDUAL: metal; red background; lg 9 in., w 6 in.
Emblem:	EMBLEM, AUTOMOBILE, INDIVIDUAL PLATE: USMC; metal
Star:	STAR, AUTOMOBILE, INDIVIDUAL PLATE: metal

6. NOTES

6.1 Intended use. The metal individual plates and attachable metal emblem and stars are intended for automobiles used by the Commandant and general officers of the Marine Corps.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:17Z
Check the source to verify that this is the current version before use.

6.2 Ordering data.

6.2.1 Acquisition requirements. The acquisition documents should specify the following:

(a) Title, number and date of this specification.
(b) Type plate required (see 1.2).
(c) Emblems and stars required (see 1.2).
(d) Whether first article is required (see 3.2).
(e) When mold of star shall not remain property of supplier (see 3.4.2.1).
(f) Selection of applicable levels of packaging (see 5.1).

6.2.2 Data requirements. When this specification is used in an acquisition which incorporates a DD Form 1423, Contract Data Requirements List (CDRL), the data requirements identified below shall be developed as specified by an approved Data Item Description (DD Form 1664) and delivered in accordance with the approved CDRL incorporated into the contract. When the provisions of DAR 7-104.9 (n) (2) are invoked and the DD Form 1423 is not used, the data specified below shall be delivered by the contractor in accordance with the contract or purchase order requirements. Deliverable data required by this specification is cited in the following paragraphs.

Paragraph no.	Data requirements	Applicable DID no.	Options
4.2	Inspection System Program Plan	DI-R-4803	--
4.4	First Article Inspection Procedure	DI-T-4901	--
4.4	First Article Inspection Report	DI-T-4902	--
4.5	Production/Acceptance Inspection Procedures	DI-T-4903	--
4.5	Production Inspection Reports	DI-T-4904	--
4.6	Reports, Test	DI-T-2072	--

(Data item descriptions related to this specification, and identified in section 6, will be approved and listed as such in DoD 5000.19L., Vol. II, AMSDL. Copies of data item descriptions required by the contractor in connection with specific acquisition functions should be obtained from the Naval Publications and Forms Center or as directed by the contracting officer.)

6.3 Standard sample. For information regarding the availability of the standard sample plates, emblem, and star, address inquiry to the procuring activity issuing the invitation for bids.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:17Z
Check the source to verify that this is the current version before use.

6.4 First article. Examination, test and approval shall be as specified by the contracting officer (see 3.2).

6.5 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Preparing activity:
Navy - MC
Project No. 8345-N158

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:17Z
Check the source to verify that this is the current version before use.

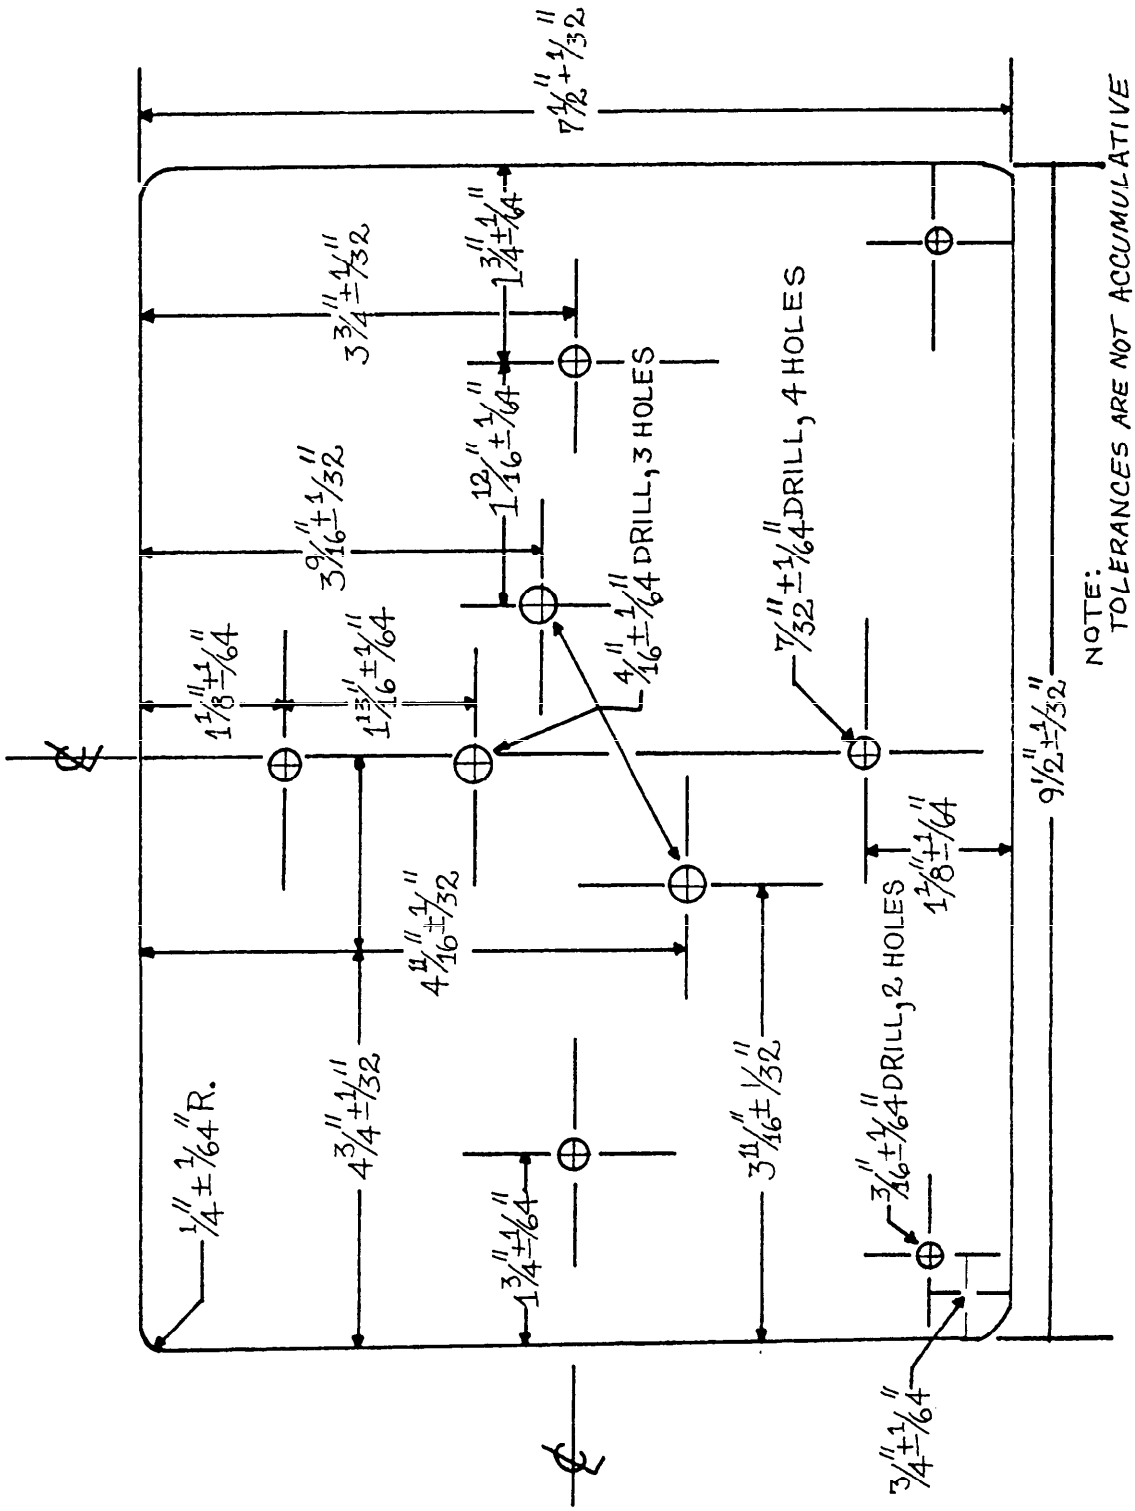


FIGURE 1: PLATE, AUTOMOBILE INDIVIDUAL :— METAL
COMMANDANT'S, U.S.M.C

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:17Z
Check the source to verify that this is the current version before use.


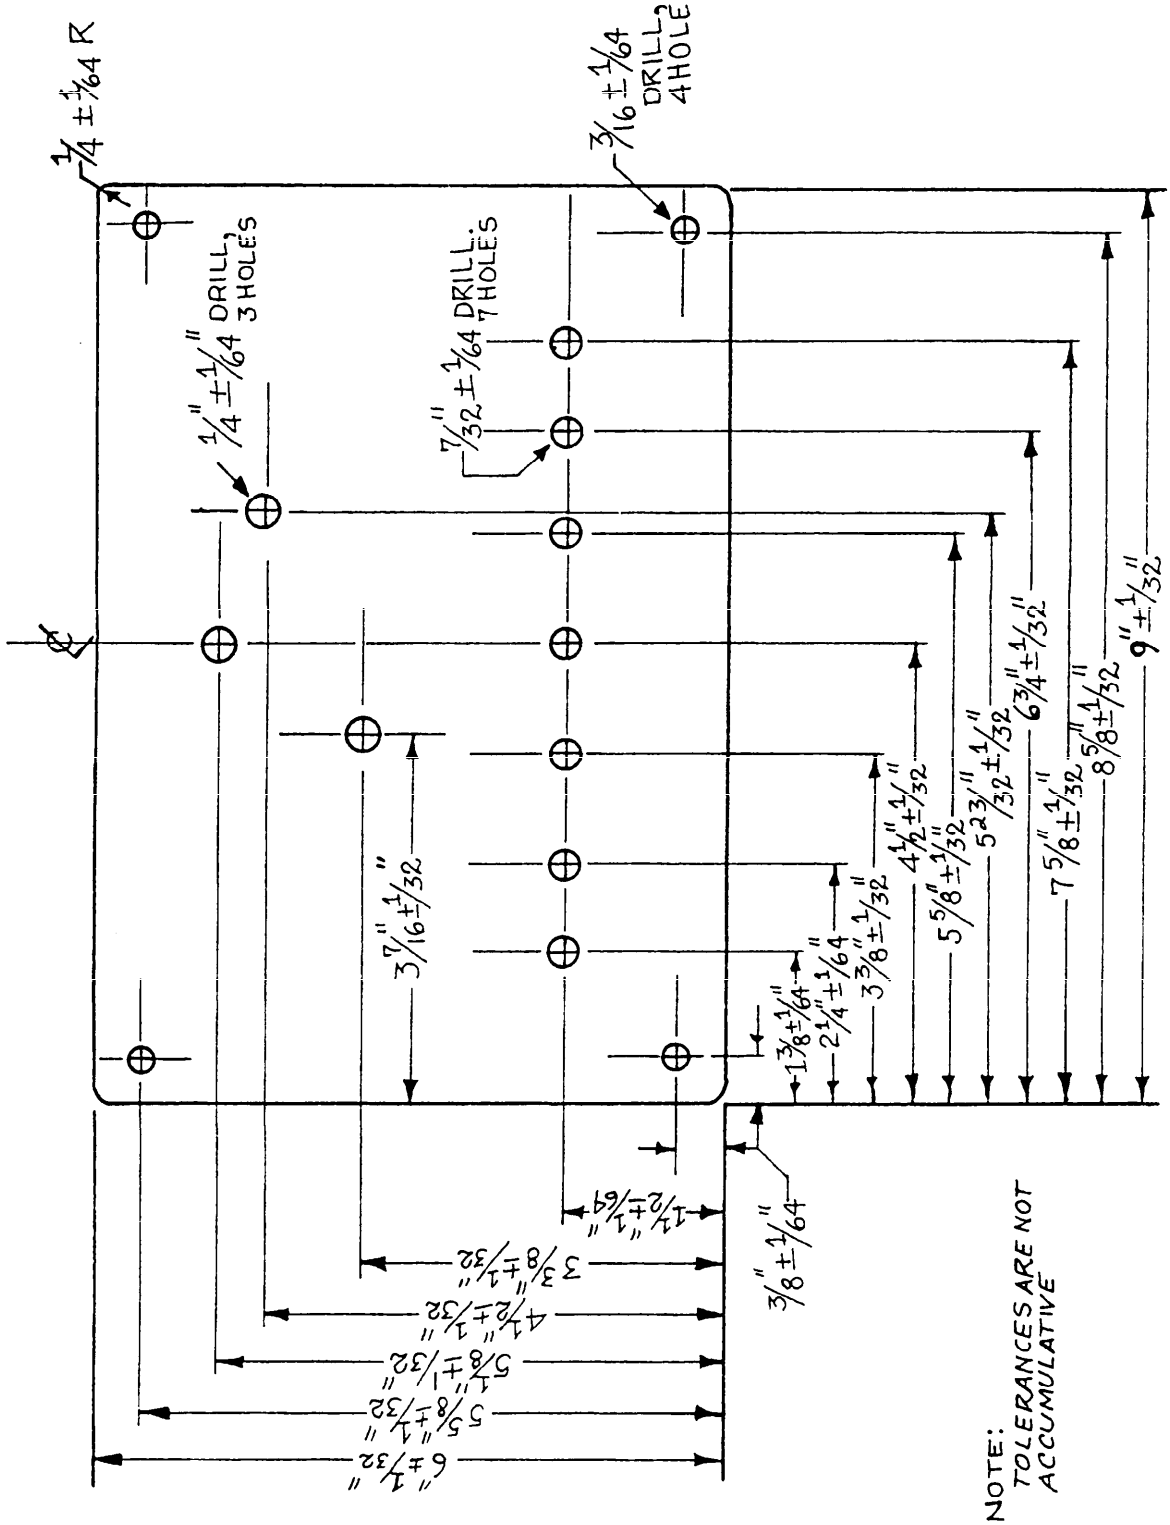



FIGURE 2. PLATE. AUTOMOBILE. INDIVIDUAL. -- METAL
GENERAL OFFICER'S, U.S.M.C

Source: https://assist.dla.mil -- Downloaded: 202610-19T06:17Z
Check the source to verify that this is the current version before use.




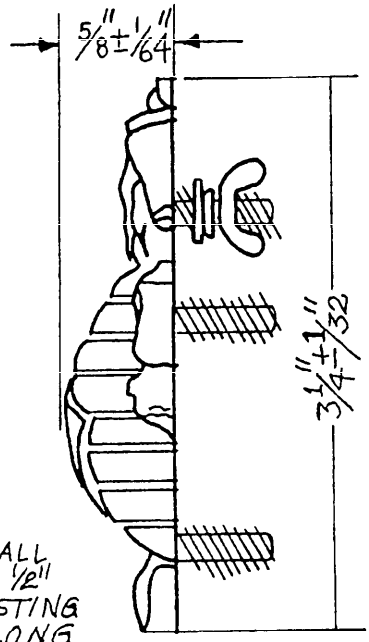

ALL SCREW POSTS SHALL HAVE A FREE LENGTH OF 1/2" TO 5/8" (FROM EDGE OF CASTING TO END OF POST); 3/4" ± 1/32" LONG BEFORE EMBEDDING (FOR STAR); PROVIDED WITH LOCKWASHERS AND FLAT WASHERS 7/32" TO 11/32" I.D. DIA. AND 1/32" MINIMUM THICKNESS.

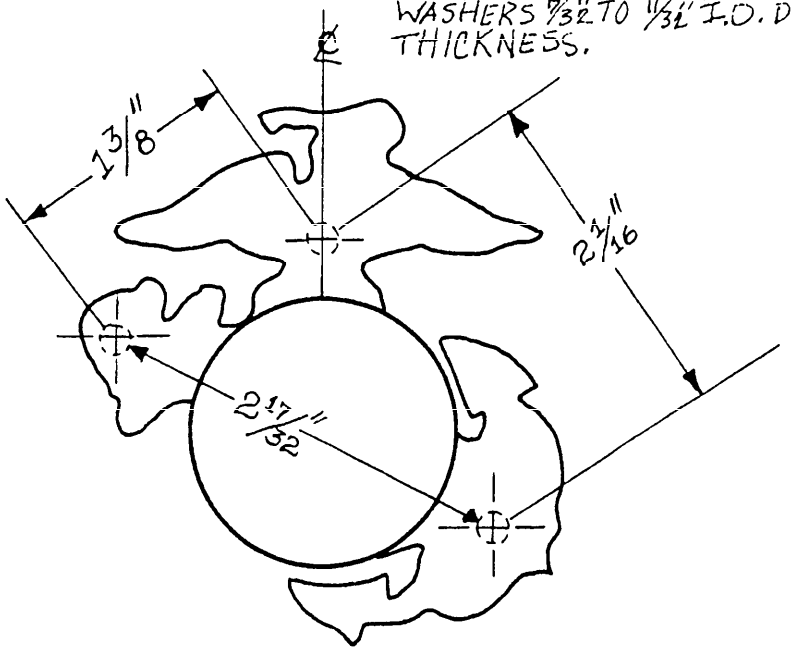

EMBLEM, BACK VIEW, LOCATION OF SCREW POSTS
TOLERANCES: ± 1/16

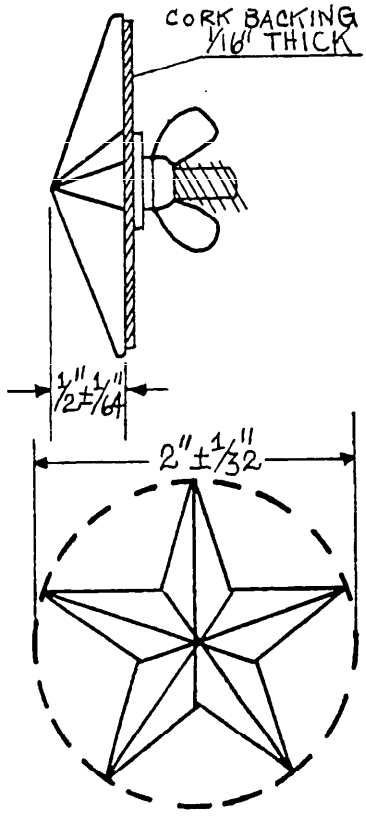

STAR

EMBLEM AND STAR

FIGURE 3. PLATE, AUTOMOBILE, INDIVIDUAL:— METAL

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:17Z
Check the source to verify that this is the current version before use.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-P-19611C(MC)	Plates, Automobile, Individual: Metal; Emblem, and Star, etc.

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*:
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 202610-19T06:17Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commandant of the Marine Corps
Headquarters, U. S. Marine Corps
Attn: Code LMA-1
Washington, D. C. 20380

Source: https://assist.dla.mil -- Downloaded: 202610-19T06:17Z
Check the source to verify that this is the current version before use.