MIL-S-19622/10B(SH)
24 June 1986
SUPERSEDING
MIL-S-19622/10A(SHIPS)
19 May 1967


MILITARY SPECIFICATION SHEET

(B) STUFFING TUBE, NYLON: CAP

This specification sheet is approved for use within the Naval Sea Systems Command and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the caps described herein shall consist of this specification and the latest issue of MIL-S-19622.

(B)

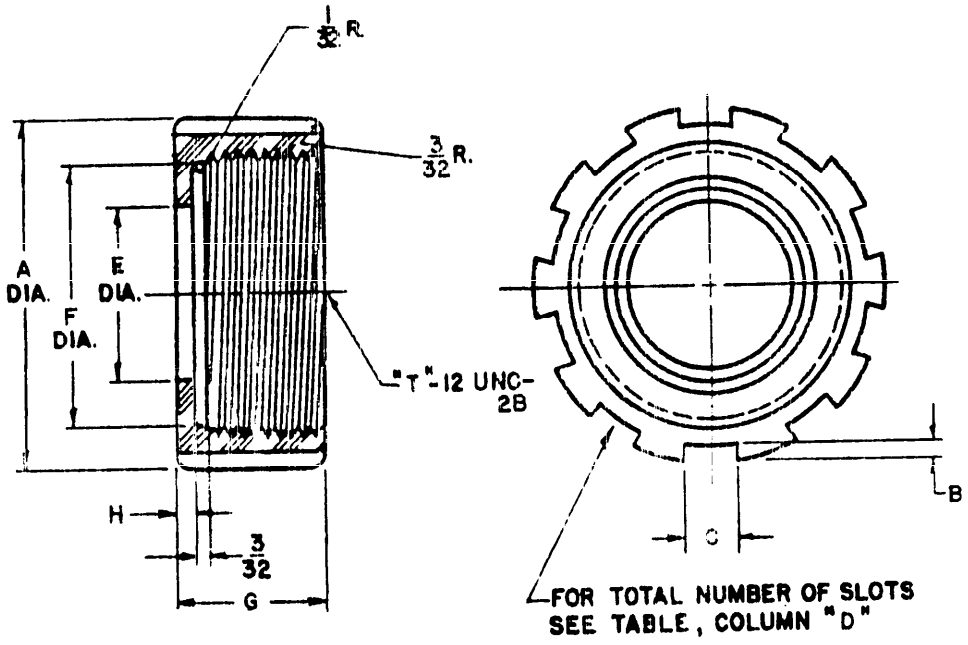


SH 12723

(B) FIGURE 1. Dimensions and configuration.

(B) denotes changes.

FSC 5975

AMSC N/A
DISTRIBUTION STATEMENT A Approved for public release; distribution unlimited



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:22Z
Check the source to verify that this is the current version before use.

(B) TABLE I. Size selection.

| (B) Tube size | Military part number | Cap dimensions and configuration 1/ 2/ | | | | | | | | | Superseded part number |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | | A DIA | B | C | D (slots) | E DIA | F | G | H | T | |
| 1 | M19622/10-0001 | 1.250 | 0.093 | 0.250 | 8 | 0.412 | 0.750 | 0.656 | 0.093 | 7/8 | MS16170-10 |
| 2 | -0002 | 1.375 | .093 | .250 | 8 | .626 | .812 | .656 | .093 | 1 | MS16170-11 |
| 3 | -0003 | 1.500 | .093 | .250 | 8 | .750 | .953 | .656 | .093 | 1-1/8 | MS16170-12 |
| 3/4 | -0004 | 1.625 | .093 | .250 | 8 | .887 | 1.093 | .656 | .093 | 1-1/4 | MS16170-13 |
| 4T | -0005 | 1.750 | .093 | .250 | 8 | .887 | 1.093 | .656 | .093 | 1-3/8 | MS16170-13T |
| 5 | -0006 | 2.500 | .125 | .375 | 10 | 1.243 | 1.750 | 1.062 | .125 | 2 | MS16170-14 |
| 6 | -0007 | 3.000 | .125 | .500 | 10 | 1.567 | 2.219 | 1.250 | .125 | 2-1/2 | MS16170-15 |
| 7 | -0008 | 3.375 | .187 | .500 | 10 | 1.751 | 2.437 | 1.375 | .125 | 2-3/4 | MS16170-16 |
| 8 | -0009 | 3.875 | .187 | .500 | 12 | 2.151 | 2.906 | 1.500 | .156 | 3-1/4 | MS16170-17 |
| 9 | -0010 | 4.750 | .187 | .625 | 12 | 2.904 | 3.687 | 1.502 | .156 | 4 | MS16170-18 |

(B) 1/ Dimensions are in inches.
2/ Tolerance shall be as follows:
Decimals - Plus or minus 0.010 per linear inch, whichever is greater.
Angular dimensions - Plus or minus 30 minutes.
Threads - As specified in FED-STD-H28/2.
3/ Original size 4 is for replacement in existing installations only when size "4T" does not fit.

(B) Requirement:
Marking. Military part number, tube size and manufacturer's logo or name in 1/8 inch high raised letters on face of cap (see MIL-S-19622).

Preparing activity:
Navy - SH
(Project 5975-N612-10)



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:22Z
Check the source to verify that this is the current version before use.