
MILITARY SPECIFICATION SHEET

STUFFING TUBE, NYLON: BUSHING, NEOPRENE

This specification sheet is approved for use within the Naval Sea Systems Command and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the neoprene bushings described herein shall consist of this specification and the latest issue of MIL-S-19622.

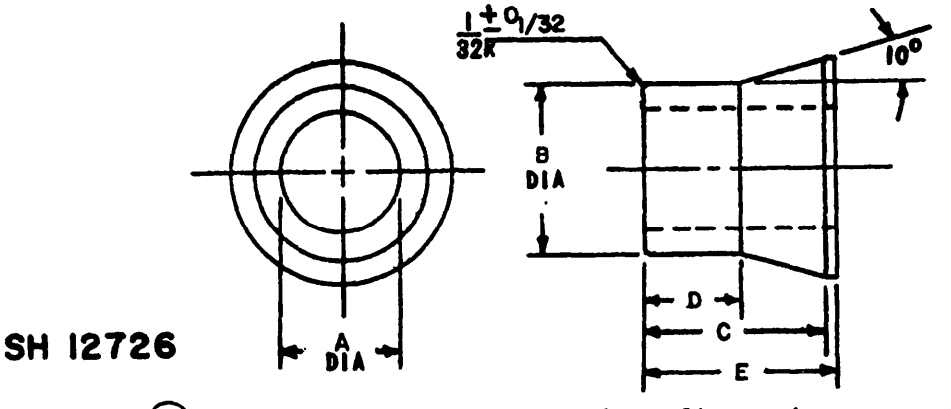

(E) FIGURE 1. Dimensions and configuration.

(E) TABLE I. Size selection.

(E) Tube size	Military part number	Dimensions 1/ 2/					Superseded part number
		A DIA	B DIA	C	D	E	
1	M19622/13-0001	0.187	0.562	0.687	0.343	0.750	MS16174-102
	-0002	.127	.562	.687	.343	.750	MS16174-102A
	-0003	.150	.562	.687	.343	.750	MS16174-102B
	-0004	.234	.562	.687	.343	.750	MS16174-103
	-0005	.278	.562	.687	.343	.750	MS16174-103A
	-0006	.296	.562	.687	.343	.750	MS16174-104

See footnotes at end of table.

(E) denotes changes.

AMSC N/A
FSC 5975
DISTRIBUTION STATEMENT A Approved for public release; distribution unlimited

Source: https://assist.dla.mil -- Downloaded: 202610-19T06:22Z
Check the source to verify that this is the current version before use.

(E) TABLE I. Size selection. - Continued

(E) Tube size	Military part number	Dimensions 1/ 2/ A DIA	B DIA	C	D	E	Superseded part number
2	M19622/13-0007	0.325	0.627	0.750	0.343	0.813	MS16174-105
	-0008	.367	.627	.750	.343	.813	MS16174-106
	-0009	.390	.627	.750	.343	.813	MS16174-107
	-0010	.425	.627	.750	.343	.813	MS16174-108
	3/ -0054	.472	.627	.750	.343	.813	MS16174-109
3	-0011	.472	.767	.750	.343	.813	MS16174-109A
4 or 4T	-0012	.500	.908	.750	.343	.813	MS16172-110
	-0013	.547	.908	.750	.343	.813	MS16174-111
	-0014	.584	.908	.750	.343	.813	MS16174-112
	-0015	.609	.908	.750	.343	.813	MS16174-113
	-0016	.665	.908	.750	.343	.813	MS16174-114
	-0017	.700	.908	.750	.343	.813	MS16174-114A
	-0018	.719	.908	.750	.343	.813	MS16174-115
	3/ -0053	.777	.908	.750	.343	.813	MS16174-116
5	-0019	.777	1.345	1.125	.625	1.188	MS16174-117A
	-0020	.812	1.345	1.125	.625	1.188	MS16174-117
	-0021	.853	1.345	1.125	.625	1.188	MS16174-118
	-0022	.889	1.345	1.125	.625	1.188	MS16174-119
	-0023	.937	1.345	1.125	.625	1.188	MS16174-120
	-0024	.980	1.345	1.125	.625	1.188	MS16174-121
	-0025	1.021	1.345	1.125	.625	1.188	MS16174-121A
	-0026	1.042	1.345	1.125	.625	1.188	MS16174-122
	-0027	1.073	1.345	1.125	.625	1.188	MS16174-123
	-0028	1.113	1.345	1.125	.625	1.188	MS16174-124
	-0057	0.766	1.345	1.125	.625	1.188	---
6	-0058	.806	1.752	1.375	.687	1.438	---
	-0055	.886	1.752	1.375	.687	1.438	---
	-0056	.956	1.752	1.375	.687	1.438	---
	-0029	1.159	1.752	1.375	.687	1.438	MS16174-125A
	-0030	1.167	1.752	1.375	.687	1.438	MS16174-125B
	-0031	1.200	1.752	1.375	.687	1.438	MS16174-125
	-0032	1.244	1.752	1.375	.687	1.438	MS16174-125C
	-0033	1.305	1.752	1.375	.687	1.438	MS16174-126
	-0034	1.350	1.752	1.375	.687	1.438	MS16174-126A
	-0035	1.390	1.752	1.375	.687	1.438	MS16174-127
7	-0036	1.458	1.939	1.500	.750	1.625	MS16174-129A
	-0037	1.500	1.939	1.500	.750	1.625	MS16174-129
	-0038	1.566	1.939	1.500	.750	1.625	MS16174-130

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:22Z
Check the source to verify that this is the current version before use.

(E) TABLE I. Size selection. - Continued

(E) Tube size	Military part number	Dimensions 1/ 2/ A DIA	B DIA	C	D	E	Superseded part number
8	M19622/13-0039	1.641	2.314	1.750	0.875	1.875	MS16174-132
	-0040	1.688	2.314	1.750	.875	1.875	MS16174-132A
	-0041	1.735	2.314	1.750	.875	1.875	MS16174-132B
	-0042	1.812	2.314	1.750	.875	1.875	MS16174-133
	-0043	1.859	2.314	1.750	.875	1.875	MS16174-133A
	-0044	1.906	2.314	1.750	.875	1.875	MS16174-133B
9	-0045	2.046	3.255	2.000	.937	1.875	MS16174-133B
	-0046	2.093	3.255	2.000	.937	2.125	MS16174-134A
	-0047	2.140	3.255	2.000	.937	2.125	MS16174-134B
	-0048	2.285	3.255	2.000	.937	2.125	MS16174-135
	-0049	2.364	3.255	2.000	.937	2.125	MS16174-136
	-0050	2.418	3.255	2.000	.937	2.125	MS16174-137
	-0051	2.540	3.255	2.000	.937	2.125	MS16174-137A
	-0052	2.700	3.255	2.000	.937	2.125	MS16174-138

(E) 1/ Dimensions are in inches.
2/ Dimensional tolerances shall be as follows:

Size	Fixed (plus or minus)*	Closure**
0-0.499	0.010	0.015
0.500- .999	.010	.018
1.000-1.999	.015	.020
2.000-2.999	.020	.025
3.000-3.999	.025	.030

* Fixed dimension tolerances apply individually to each fixed dimension by its own size.
** Closure dimension tolerances are determined by the largest closure dimension and this single tolerance is used for all other closure dimensions
3/ For replacement in existing installations. Not to be used for new construction.

Requirement:
Marking. Tube size in 1/8 inch high raised letters molded on face or may be stamped with ink type solution of contrasting color.

Preparing activity:
Navy - SH
(Project 5975-N612-13)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:22Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:22Z
Check the source to verify that this is the current version before use.