INCH-POUND

MIL-DTL-55302/17B
24 March 2004
SUPERSEDING
MIL-C-55302/17A
11 August 1970

DETAIL SPECIFICATION SHEET

# CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES: SOCKET, STRAIGHT-THRU, FOR PRINTED WIRING BOARDS (.200 SPACING)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-55302.


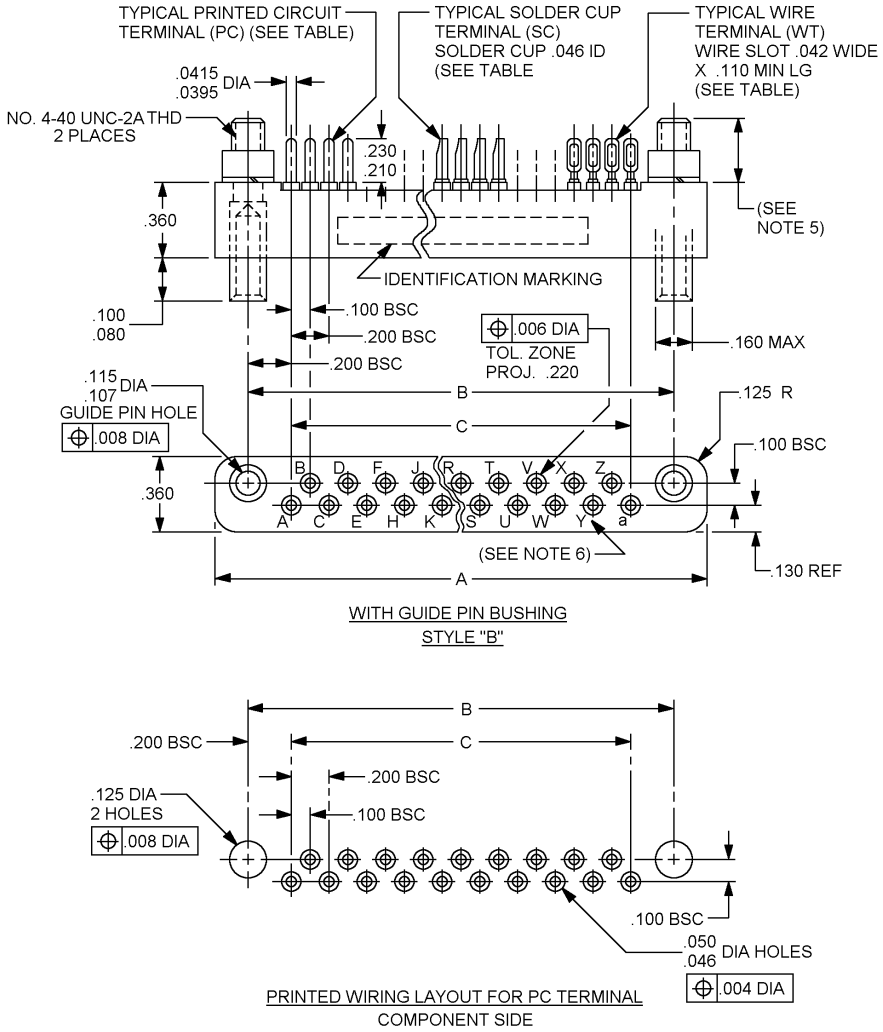



FIGURE 1. Connectors, receptacle (.200 spacing).



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:44Z
Check the source to verify that this is the current version before use.

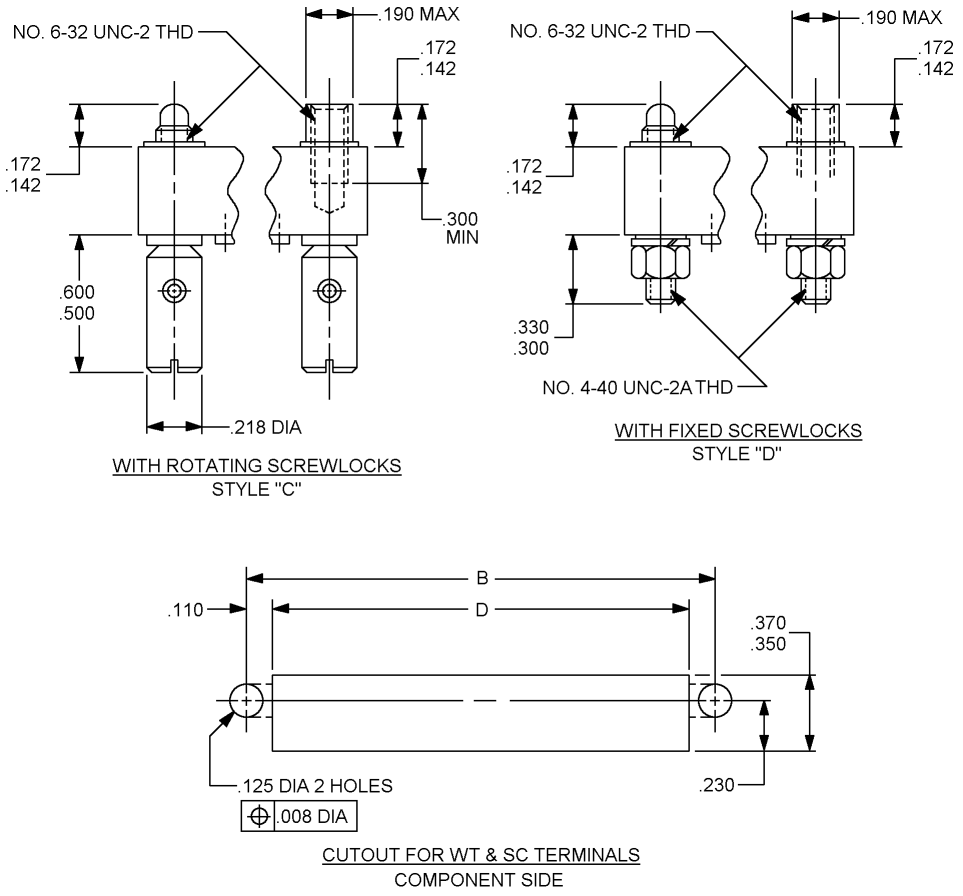


Dimensions and Part or Identifying Number (PIN).

| Guide pin bushing | | | Rotating screwlocks | | | Fixed screwlocks | | | No. contacts | Dimensions | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| PC | SC | WT | PC | SC | WT | PC | SC | WT | | A ±.010 | B BSC | C Ref | D ±.010 |
| PIN M55302/17-( ) | | | | | | | | | | | | | |
| Dash number | Dash number | Dash number | Dash number | Dash number | Dash number | Dash number | Dash number | Dash number | | | | | |
| 01 | 07 | 13 | 19 | 25 | 31 | 37 | 43 | 49 | 7 | 1.300 | 1.000 | .600 | .780 |
| 02 | 08 | 14 | 20 | 26 | 32 | 38 | 44 | 50 | 9 | 1.500 | 1.200 | .800 | .980 |
| 03 | 09 | 15 | 21 | 27 | 33 | 39 | 45 | 51 | 11 | 1.700 | 1.400 | 1.000 | 1.180 |
| 04 | 10 | 16 | 22 | 28 | 34 | 40 | 46 | 52 | 15 | 2.100 | 1.800 | 1.400 | 1.580 |
| 05 | 11 | 17 | 23 | 29 | 35 | 41 | 47 | 53 | 19 | 2.500 | 2.200 | 1.800 | 1.980 |
| 06 | 12 | 18 | 24 | 30 | 36 | 42 | 48 | 54 | 23 | 2.900 | 2.600 | 2.200 | 2.380 |
| 55 | 56 | 57 | 58 | 59 | 60 | 61 | 62 | 63 | 37 | 4.300 | 4.000 | 3.600 | 3.780 |

Solder termination's:
PC - Printed circuit
SC - Solder cup
WT - Wire terminal

FIGURE 1. Connectors, receptacle (.200 spacing) - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:44Z
Check the source to verify that this is the current version before use.

| Inches | mm | Inches | mm | Inches | mm | Inches | mm |
|---|---|---|---|---|---|---|---|
| .004 | 0.10 | .142 | 3.61 | .370 | 9.40 | 1.980 | 50.29 |
| .006 | 0.15 | .150 | 3.81 | .500 | 12.70 | 2.100 | 53.34 |
| .008 | 0.20 | .160 | 4.06 | .600 | 15.24 | 2.200 | 55.88 |
| .010 | 0.25 | .165 | 4.19 | .780 | 19.81 | 2.380 | 60.45 |
| .0395 | 1.00 | .172 | 4.37 | .800 | 20.32 | 2.500 | 63.50 |
| .0415 | 1.05 | .190 | 4.83 | .980 | 24.89 | 2.600 | 66.04 |
| .046 | 1.17 | .200 | 5.08 | 1.000 | 25.40 | 2.900 | 73.66 |
| .050 | 1.27 | .210 | 5.33 | 1.180 | 29.97 | 3.600 | 91.44 |
| .080 | 2.03 | .218 | 5.54 | 1.200 | 30.48 | 3.780 | 96.01 |
| .100 | 2.54 | .220 | 5.59 | 1.300 | 33.02 | 4.000 | 101.60 |
| .107 | 2.72 | .230 | 5.84 | 1.400 | 35.56 | 4.300 | 109.22 |
| .110 | 2.79 | .300 | 7.62 | 1.500 | 38.10 | | |
| .115 | 2.92 | .330 | 8.38 | 1.700 | 43.18 | | |
| .125 | 3.18 | .350 | 8.89 | 1.800 | 45.72 | | |
| .130 | 3.30 | .360 | 9.14 | | | | |

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerances are ±.005 (0.13 mm).
4. These connectors mate with connectors specified in MIL-DTL-55302/16 and MIL-DTL-55302/18 and are primarily for use with single-sided and double-sided printed wiring board.
5. Mounting screws for .062 (1.57 mm) and .094 (2.39 mm) thick printed wiring boards shall be .250 (6.35 mm) long.
6. Contact identification letters may be molded as shown on horizontal.

FIGURE 1. Connectors, receptacle (.200 spacing) - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:44Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:

Dimensions and configuration: See figure 1 and note 5.

Material:
Style B mounting and guidance hardware shall be brass rod, C36000, half hard as specified in ASTM B16, nickel plated .0002 inch (0.01 mm) thick in accordance with SAE-AMS-QQ-N-290. Styles C and D mounting guidance hardware shall be corrosion resistant steel in accordance with ASTM A276, class 303, passivated in accordance with SAE-AMS-QQ-P-35.

Contact identification:
Shall be alphabetical and sequential in the pattern indicated, using upper case characters followed by lower case characters.

Mating and unmating:
The maximum insertion force, in pounds, shall not exceed a value equal to 1.0 times the number of contacts, and the withdrawal force, in pounds, shall be a minimum of 0.25 times the number of contacts, and shall not exceed the measured insertion force.

Contact resistance:
The average resistance of all contact pairs measured shall not exceed 0.015 ohm, and no individual contact pair shall have a resistance exceeding 0.020 ohm.

Dielectric withstanding voltage:
Sea level: 1,000 volts rms, 60 cycles, ac.
High altitude: 500 volts rms, 60 cycles, ac.

Pin size: 20.
Wire size: 20.
Current rating: 7.5 amperes.

PIN: See figure 1.

Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Reference documents. In addition to MIL-DTL-55302, this document references the following:

| | |
|---|---|
| MIL-DTL-55302/16 | ASTM A276 |
| MIL-DTL-55302/18 | SAE-AMS-QQ-P-35 |
| ASTM B16 | SAE-AMS-QQ-N-290 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:44Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 11
DLA - CC

Preparing activity:
DLA - CC

(Project 5935-4411-013)

Review activities:
Army - AR, AT, CR4, MI
Navy - AS, MC
Air Force - 19

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://www.dodssp.daps.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:44Z
Check the source to verify that this is the current version before use.