
MILITARY SPECIFICATION SHEET


SWITCH CAPSULE, DRY REED TYPE, SPST (NO), 1 AMPERE

The complete requirements for procuring the switch capsule described herein shall consist of this document and the latest issue of Specification MIL-S-55433.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

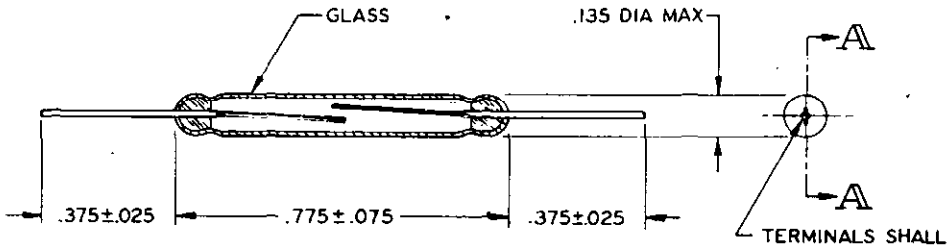

SECTION A-A
NO SCALE



INCHES	MM
.025	.64
.040	1.02
.075	1.91
.135	3.43
.375	9.53
.775	19.69

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

REQUIREMENTS:

Contact resistance: 100 milliohms maximum initial. 2 ohms maximum after life.

Operate and release ampere-turns:
Operate - See table I.
Release - 30 to 75 percent of operate.

Contact bounce: 300 microseconds maximum.

Operate and release time: 1 millisecond, maximum.

Operating temperature range: -55° to +125° C.

Dielectric withstanding voltage: 250 volts ac.

Terminal strength: Applied force - 2 pounds.

Vibration, high frequency: Method 204, test condition B, MIL-STD-202.

Part number: See table I.

Ⓑ denotes change

FSC 5930

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:21Z
Check the source to verify that this is the current version before use.

TABLE I. Operate ampere-turns and part numbers.

Operate ampere-turns	Part No.
35 ± 15 NI	M55433/1-001
65 ± 15 NI	M55433/1-002

Load life: See table II.

TABLE II. Load life.

Load current Amperes dc	Millions of operations			
	Resistive		Inductive	
	28v	15v	28v	15v
1.000	1.0	2.5	---	---
0.500	5.0	7.5	0.5	1.0
0.250	7.5	10.0	2.0	4.0
0.125	20.0	30.0	3.0	5.0

Ⓑ The loads to be used for life test and the number of sample units for each test shall be as follows:

1.000 amperes, 28v, resistive - 10 sample units
0.125 amperes, 28v, resistive - 5 sample units
0.125 amperes, 15v, resistive - 5 sample units
0.500 amperes, 28v, inductive - 10 sample units
0.125 amperes, 28v, inductive - 5 sample units
0.125 amperes, 15v, inductive - 5 sample units

All other load-life ratings are for application information only.

Custodians:
Army - EL
Navy - EC
Air Force - 11

Review activities:
Army - EL, MU
Navy - EC
Air Force - 11, 17, 85
DSA - ES

User activities:
Army -
Navy -
Air Force - 19

Preparing activity:
Army - EL

(Project 5930-0629-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:21Z
Check the source to verify that this is the current version before use.