MIL-C-62/11C
19 December 1968
SUPERSEDING
MIL-C-62/11B
23 September 1965

MILITARY SPECIFICATION SHEET


CAPACITORS, FIXED, ELECTROLYTIC

(DC, ALUMINUM, DRY ELECTROLYTE, POLARIZED)


STYLES CE63 AND CE64

The complete requirements for procuring the capacitors described herein shall consist of this document and the latest issue of Specification MIL-C-62.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

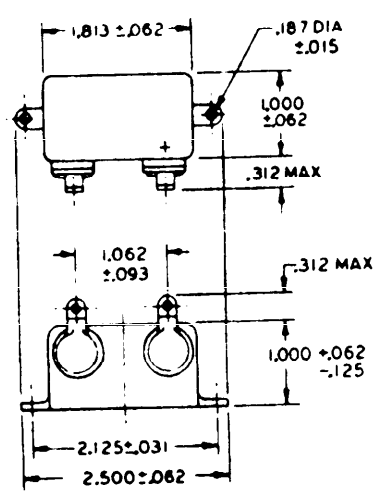


CE63

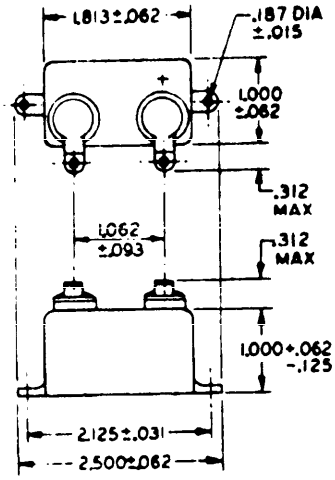

CE64

© FOR REPLACEMENT PURPOSES ONLY NOT TO BE USED FOR NEW DESIGN

INCHES	MM	INCHES	MM
.015	.38	.312	7.92
.031	.79	1.000	25.40
.062	1.57	1.062	26.97
.093	2.36	1.813	46.05
.125	3.18	2.125	53.98
.187	4.75	2.500	63.50



STYLES CE63 and CE64 capacitors.

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Capacitors are mounted by lugs (Family 5).
4. There is an indeterminate resistance between the metal case and the negative terminal.

© denotes changes

FSC 5910

Source: https://assist.dla.mil -- Downloaded: 202610-16T04:35Z
Check the source to verify that this is the currentversion before use.

TABLE I. Styles CE63 and CE64 capacitors.

Type designation	Capacitance	DC rated voltage	DC leakage current	Maximum impedance at 120 $^{+10}_{-5}$ Hz at -40° $^{+0°}_{-3°}$ C	Dissipation factor
	uf	volts	ua	ohms	percent
CE63C101E	100	15	58	750	20
CE63C250F	25	25	38	1200	20
CE63C750F	75	25	66	400	20
CE63C250G	25	50	53	1000	15
CE63C500G	50	50	75	500	15
CE63C250H	25	100	75	720	15
CE63C200J	20	150	83	800	12
CE63C150K	15	200	83	940	12
CE63C120M	12	250	83	1000	12
CE63C100N	10	300	83	1000	12
CE63C8R0P	8	350	80	3200	12
CE63C6R0Q	6	400	74	3400	12
CE63C4R0R	4	450	64	5000	12
CE64C101E	100	15	58	750	20
CE64C250F	25	25	38	1200	20
CE64C750F	75	25	66	400	20
CE64C100J	10	150	58	1600	12
CE64C200J	20	150	83	800	12
CE64C100K	10	200	67	1400	12
CE64C100N	10	300	83	1000	12
CE64C8R0P	8	350	80	3200	12
CE64C4R0R	4	450	64	5000	12

REQUIREMENTS:

Dimensions and configuration:
See figure and table I.

Case type: Bathtub, side mounting lugs (CE63) and bottom mounting lugs (CE64).

Capacitance value: See table I.

Capacitance tolerance:
At 200 volts, dc rated, and above:
-10, +50 percent (A).
At 150 volts, dc rated, and less:
-10, +75 percent (B).

Operating temperature range:
For 4.0 uf at 450 vdc:
-40° C to +65° C.
For all others: -40° C to +85° C.

Solderability: Method 208 of MIL-STD-202.

DC leakage: See table I.

Capacitance: Method 305 of MIL-STD-202.

Dissipation factor: See table I.

Terminal strength: Method 211 of MIL-STD-202, test conditions A, B, and E.

Shock, medium impact: Method 205, test condition C, MIL-STD-202.

Vibration, low frequency: Method 201 of MIL-STD-202.

Salt spray (corrosion): Method 101, test condition B, MIL-STD-202.

Temperature cycling and immersion.
Temperature cycling: Method 102, test condition D, MIL-STD-202.
Immersion: Method 104, test condition C, MIL-STD-202.
DWV-Insulating sleeves-Method 301 of MIL-STD-202. 4,000 volts dc applied.
DCL - Not more than 150 percent of initial measurement.
Capacitance change - 5 percent.
DF - See table I.
Corrosion - Not more than 10 percent

Source: https://assist.dla.mil -- Downloaded: 202610-16T04:35Z
Check the source to verify that this is the current version before use.

Moisture resistance: Method 106 of MIL-STD-202.
Insulation resistance (insulating sleeve) -
Not less than 100 megohms.
DWV-Insulating sleeves-Method 301 of MIL-STD-202. 4,000 volts dc applied.
DCL - Not more than 150 percent of initial requirement.
Capacitance change - 5 percent.
DF - See table I.
Corrosion - Not more than 10 percent.

Stability at low and high temperature:
In accordance with MIL-C-62.
Step 1 (at +25° C):
DCL - See table I.
Capacitance change - See table I.
DF - See table I.
Step 2 (at -40° C):
Impedance - See table I.
Step 3 (at +25° C):
DCL - See table I.
Capacitance change - ±5 percent of initial value.
DF - See table I.
© Step 4 (at +85° C):
Capacitance change - 20 percent of initial value.
DF - See table I.
Step 5 (at +25° C):
DCL - See table I.
Capacitance change - ±5 percent of initial value.
DF - See table I.

Surge voltage: In accordance with MIL-C-62.
DCL - See table I.
Capacitance change - 6 percent.
DF - See table I.

Vent: Not applicable.

Life: Method 108, test condition F, MIL-STD-202.
DCL - See table I.
Capacitance change:
100 volts dc rated and less:
-20, +15 percent.
DC rated voltage above 100 volts:
±15 percent.
DF - Meet the initial requirement or not exceed 150 percent of the initial measurement, whichever is greater.

Barometric pressure: Method 105 of MIL-STD-202.

Shelf life: In accordance with MIL-C-62.
Build factor - Not more than 4.0.
Shelf factor - Not more than 3.0.
DCL - Not more than 150 percent of initial requirement.
Capacitance change - 6 percent.
DF - Not more than 175 percent of initial requirement.

© Application data:
Styles CE63 and CE64 are intended for use in replacement and maintenance only. For new design, use style CE11 or CE13.

© Supersession data (see table II):
Recommended replacement items for deleted units CE63F040R and CE64F040R are CE63C4R0R and CE64C4R0C respectively.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:35Z
Check the source to verify that this is the current version before use.

TABLE II. Supersession data.

Superseded dash number	Recommended replacement style CE63 or CE64	Superseded dash number	Recommended replacement style CE63 or CE64
001	CE63C101E	012	CE63C6R0Q
002	CE63C250F	013	CE63C4R0R
003	CE63C750F	019	CE64C101E
004	CE63C250G	020	CE64C250F
005	CE63C500G	021	CE64C750F
006	CE63C250H	022	CE64C100J
007	CE63C200J	023	CE64C200J
008	CE63C150K	024	CE64C100K
009	CE63C120M	025	CE64C100N
010	CE63C100N	026	CE64C8R0P
011	CE63C8R0P	027	CE64C4R0R

Custodians:
Army - EL
Navy - EC
Air Force - 11

Review activities:
Army - EL, MU, MI
Navy - EC, AS, OS
Air Force - 11, 17, 85
DSA - ES

User activities:
Army - ME, AT, AV
Navy - MC
Air Force - 19

Preparing activity:
Army - EL

(Project 5910-0848-12)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:35Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, lapse, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12062 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Communications - Electronics Command
ATTN: DRSEL-ED-TO
Fort Monmouth, NJ 07703

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:35Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions - Type or Print)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*:
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:35Z
Check the source to verify that this is the current version before use.