INCH-POUND
MIL-PRF-62/11F
18 August 2020
SUPERSEDING
MIL-C-62/11E
30 November 2007

PERFORMANCE SPECIFICATION SHEET

# CAPACITOR, FIXED, ELECTROLYTIC (DC, ALUMINUM, DRY ELECTROLYTE, POLARIZED), STYLES CE63 AND CE64

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-62.

Inactive for new design
(For replacement purposes only)

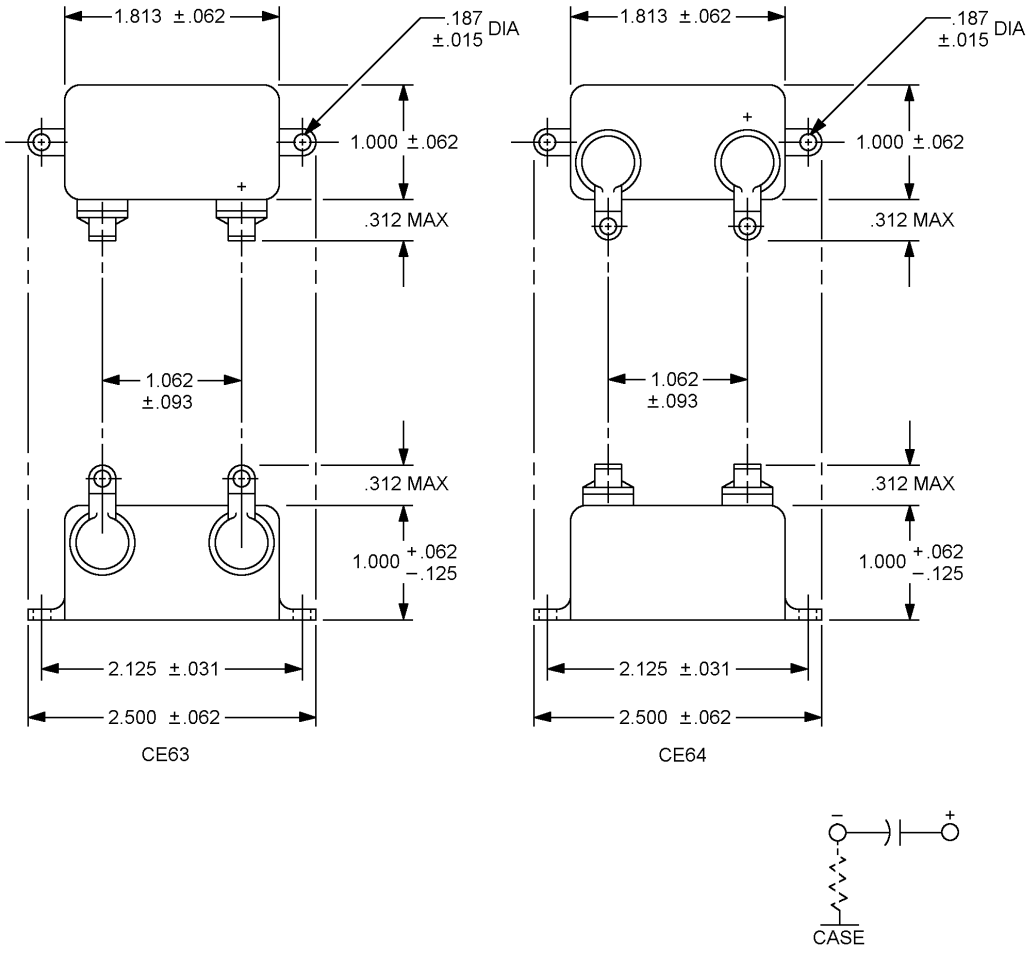



FIGURE 1. Dimensions and configuration.



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:34Z
Check the source to verify that this is the current version before use.

| Inches | mm | Inches | mm |
|---|---|---|---|
| .015 | 0.38 | .312 | 7.92 |
| .031 | 0.79 | 1.000 | 25.40 |
| .062 | 1.57 | 1.062 | 26.97 |
| .093 | 2.36 | 1.813 | 46.05 |
| .125 | 3.18 | 2.125 | 53.98 |
| .187 | 4.75 | 2.500 | 63.50 |

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Capacitors are mounted by lugs (Family 5 (see MIL-PRF-62)).
4. There is an indeterminate resistance between the metal case and the negative terminal.

FIGURE 1. Dimensions and configuration - Continued.

TABLE I. Styles CE63 and CE64 capacitors.

| Part or identifying number (PIN) | Capacitance | DC rated voltage | DC leakage | Maximum impedance at 120 +10, -5 Hz, -40°C +0°C, -3°C | Dissipation factor |
|---|---|---|---|---|---|
| | µf | Volts | µa | Ohms | Percent |
| CE63C101E | 100 | 15 | 58 | 750 | 20 |
| CE63C250F | 25 | 25 | 38 | 1,200 | 20 |
| CE63C750F | 75 | 25 | 66 | 400 | 20 |
| CE63C250G | 25 | 50 | 53 | 1,000 | 15 |
| CE63C500G | 50 | 50 | 75 | 500 | 15 |
| CE63C250H | 25 | 100 | 75 | 720 | 15 |
| CE63C200J | 20 | 150 | 83 | 800 | 12 |
| CE63C150K | 15 | 200 | 83 | 940 | 12 |
| CE63C120M | 12 | 250 | 83 | 1,000 | 12 |
| CE63C100N | 10 | 300 | 83 | 1,000 | 12 |
| CE63C8R0P | 8 | 350 | 80 | 3,200 | 12 |
| CE63C6R0Q | 6 | 400 | 74 | 3,400 | 12 |
| CE63C4R0R | 4 | 450 | 64 | 5,000 | 12 |
| CE64C101E | 100 | 15 | 58 | 750 | 20 |
| CE64C250F | 25 | 25 | 38 | 1,200 | 20 |
| CE64C750F | 75 | 25 | 66 | 400 | 20 |
| CE64C100J | 10 | 150 | 58 | 1,600 | 12 |
| CE64C200J | 20 | 150 | 83 | 800 | 12 |
| CE64C100K | 10 | 200 | 67 | 1,400 | 12 |
| CE64C100N | 10 | 300 | 83 | 1,000 | 12 |
| CE64C8R0P | 8 | 350 | 80 | 3,200 | 12 |
| CE64C4R0R | 4 | 450 | 64 | 5,000 | 12 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:34Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1 and table I.

Case type: Bathtub, side mounting lugs (CE63) and bottom mounting lugs (CE64).

Capacitance value: See table I.

Capacitance tolerance:

At 200 volts, dc rated, and above: -10, +50 percent (A).

At 150 volts, dc rated, and less: -10, +75 percent (B).

Operating temperature range:

For 4.0 μF at 450 V dc: -40°C to +65°C.

For all others: -40° C to +85°C.

DC leakage (DCL): See table I.

Dissipation factor (DF): See table I.

Terminal strength: Test conditions A, B, and E of MIL-STD-202-211 as specified in MIL-PRF-62.

Thermal shock and immersion:

Thermal shock: In accordance with MIL-PRF-62.

Immersion: In accordance with MIL-PRF-62.

Dielectric withstanding voltage (DWV) (insulating sleeves): In accordance with MIL-PRF-62.

DCL: Not more than 150 percent of initial measurement.

Capacitance change: 5 percent.

DF: See table I.

Corrosion: Not more than 10 percent.

Moisture resistance: In accordance with MIL-PRF-62.

Insulation resistance (insulating sleeve): Not less than 100 megohms.

DWV (insulating sleeves): In accordance with MIL-PRF-62.

DCL: Not more than 150 percent of initial requirement.

Capacitance change: 5 percent.

DF: See table I.

Corrosion - Not more than 10 percent.



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:34Z
Check the source to verify that this is the current version before use.

Stability at low and high temperature: In accordance with MIL-PRF-62.

Step 1 (at +25°C):

DCL: See table I.

Capacitance change: See table I.

DF: See table I.

Step 2 (at -40°C):

Impedance: See table I.

Step 3 (at +25°C):

DCL: See table I.

Capacitance change: ±5 percent of Initial value.

DF: See table I.

Step 4 (at +85°C):

Capacitance change: 20 percent of initial value.

DF: See table I.

Step 5 (at +25°C):

DCL: See table I.

Capacitance change: ±5 percent of initial value.

DF: See table I.

Surge voltage: In accordance with MIL-PRF-62.

DCL: See table I.

Capacitance change: 6 percent.

DF: See table I.

Vent: Not applicable.

Life: In accordance with MIL-PRF-62.

DCL: See table I.

Capacitance change: 100 volts dc rated and less: -20, +15 percent.

DC rated voltage above 100 volts: ±15 percent.

DF: Meet the initial requirement or not exceed 150 percent of the initial measurement, whichever is greater.



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:34Z
Check the source to verify that this is the current version before use.

Shelf life: In accordance with MIL-PRF-62.

Build factor: Not more than 4.0.

Shelf factor: Not more than 3. 0.

DCL: Not more than 150 percent of initial requirement.

Capacitance change: 6 percent.

DF: Not more than 175 percent of initial requirement.

Application data:

Styles CE63 and CE64 are intended for use in replacement and maintenance only.

For new design, use style CE11 or CE13.

Supersession data: See table II:

Recommended replacement Items for deleted units CE63F040R and CE64F040R are CE63C4R0R and CE64C4R0C respectively.

TABLE II. Supersession data.

| Superseded dash number: M62/11- | Recommended replacement PIN | Superseded dash number: M62/11- | Recommended replacement PIN |
|---|---|---|---|
| 001 | CE63C101E | 012 | CE63C6R0Q |
| 002 | CE63C250F | 013 | CE63C4R0R |
| 003 | CE63C750F | 019 | CE64C101E |
| 004 | CE63C250G | 020 | CE64C250F |
| 005 | CE63C500G | 021 | CE64C750F |
| 006 | CE63C250H | 022 | CE64C100J |
| 007 | CE63C200J | 023 | CE64C200J |
| 008 | CE63C150K | 024 | CE64C100K |
| 009 | CE63C120M | 025 | CE64C100N |
| 010 | CE63C100N | 026 | CE64C8R0P |
| 011 | CE63C8R0P | 027 | CE64C4R0R |



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:34Z
Check the source to verify that this is the current version before use.

Referenced documents. In addition to MIL-PRF-62, this document references the following:

MIL-STD-202-211

Changes from previous issue: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - CR
Navy - EC
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5910-2020-026)

Review activities:
Army - AT, AV, CR4, MI
Navy - AS, MC, OS
Air Force - 19

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using ASSIST Online database at https://assist.dla.mil/ .



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:34Z
Check the source to verify that this is the current version before use.