
MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, CIRCULAR, MINIATURE, COMPOSITE, HIGH DENSITY, QUICK COUPLING, ENVIRONMENT RESISTANT, REMOVABLE CRIMP CONTACTS, RECEPTACLE, FLANGED (SERIES A)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the connectors described herein shall consist of this specification and the latest revision of MIL-C-29600.

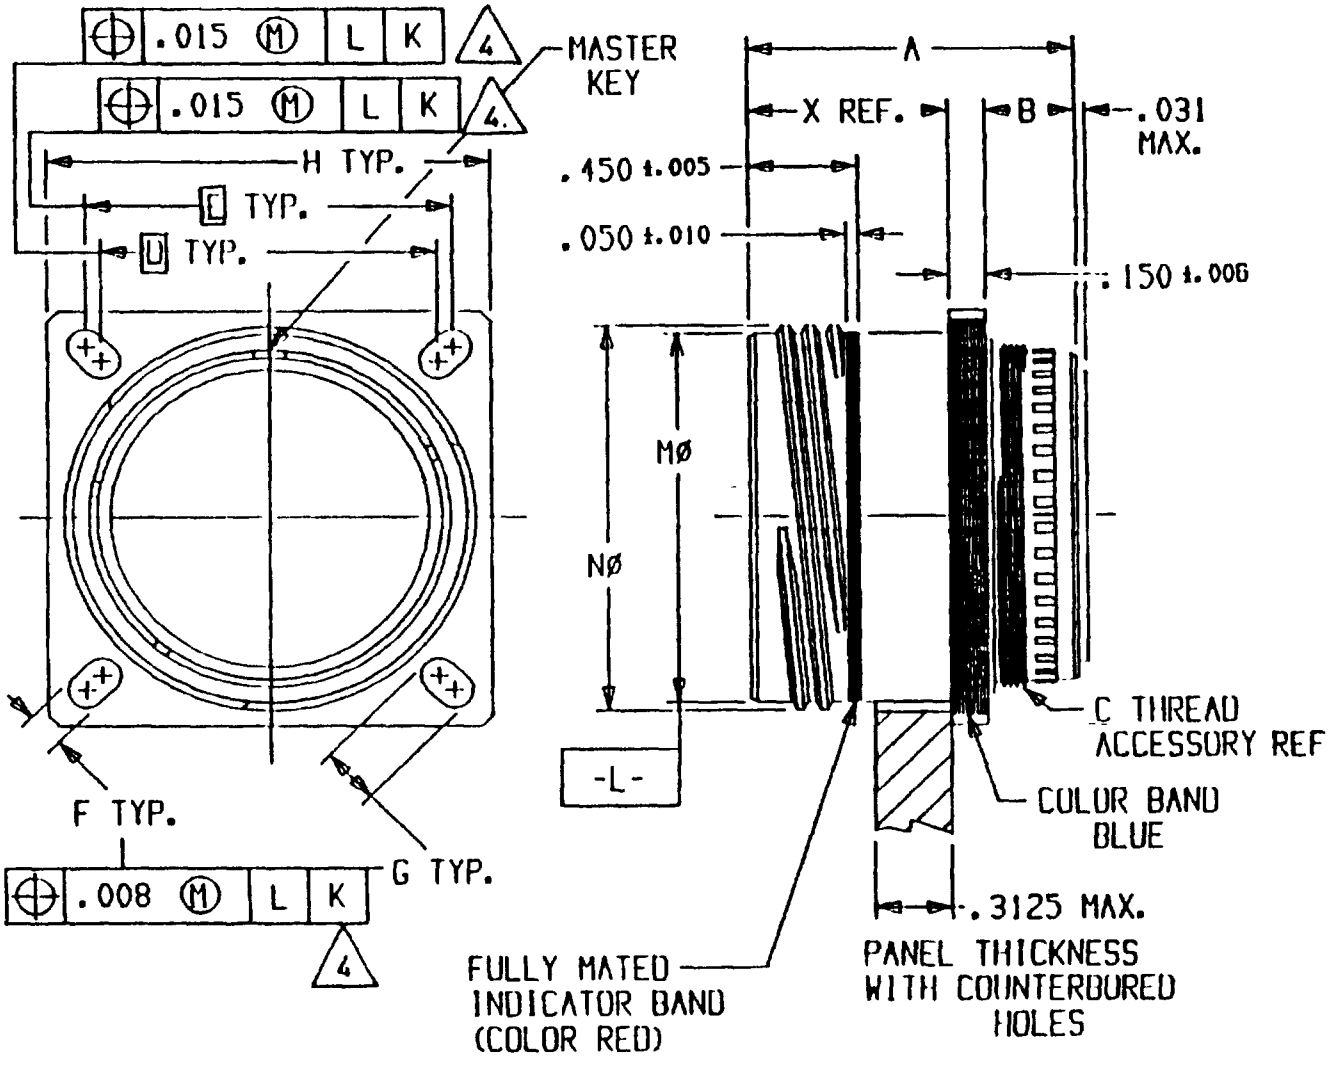

AMSC N/A

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:37Z
Check the source to verify that this is the current version before use.

NOTES:

1. Dimensions are in inches unless otherwise specified.
2. Metric equivalents are based upon 1 inch = 25.4 mm.
3. Dimensions apply after plating.
4. K datum is identified on Figure 3 of MIL-C-29600.

Shell Size	A ±.010	B ±.005	C Thread Ref	D Bsc	E Bsc	F+.004 -.002	G+.004 -.002
9	1.273	.296	.500-28	.594	.719	.128	.216
11	1.273	.296	.625-28	.719	.812	.128	194
13	1.273	.296	.750-28	.812	.906	.128	.194
15	1.273	.296	.875-28	.906	.969	.128	.173
17	1.273	.296	1.000-28	.969	1.062	.128	.194
19	1.273	296	1.125-28	1 156	1.250	.128	.194
21	1.273	.305	1.250-28	1.250	1.375	.154	.242
23	1.273	.305	1.375-28	1.375	1.500	.154	.242
25	1.273	.305	1.500-28	1.375	1.500	.154	.242

Shell Size	H Typ ±.010	M Ø Ref	N Ø Max	X Ref
9	.939	.565	.628	.827
11	1.034	.688	.753	.827
13	1 131	.814	873	.827
15	1.225	.938	1.003	.827
17	1.318	1.109	1.190	827
19	1.568	1.297	1.378	.827
21	1 694	1.422	1 503	.818
23	1.814	1.547	1.628	.818
25	1 814	1.609	1.690	.818

Inches	mm	Inches	mm	Inches	mm	Inches	mm
002	051	.594	15.088	.969	24.613	1 375	34.925
.004	102	.628	15.951	1.003	25.476	1.378	35.001
005	127	.688	17.475	1.034	26.264	1.422	36.119
010	254	719	18.263	1.062	26 975	1.500	38.100
128	3.251	.753	19.126	1.109	28.169	1.503	38 176
.154	3.912	.812	20.625	1.131	28.727	1.547	39.294
173	4.394	.814	20.676	1.156	29.362	1.568	39.827
.194	4 928	.818	20.777	1.190	30.226	1.609	40 869
216	5.486	.827	21.006	1.225	31.115	1.628	41.351
.242	6.147	.873	22.174	1.250	31.750	1.690	42.926
.296	7.518	906	23.012	1.273	32.334	1.694	43.028
.305	7 747	.938	23.825	1.297	32.944	1.814	46.076
565	14.351	939	23.851	1.318	33.477		


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:37Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Requirements shall conform to MIL-C-29600.

Mating plug: MIL-C-29600/12.

Example of part number:

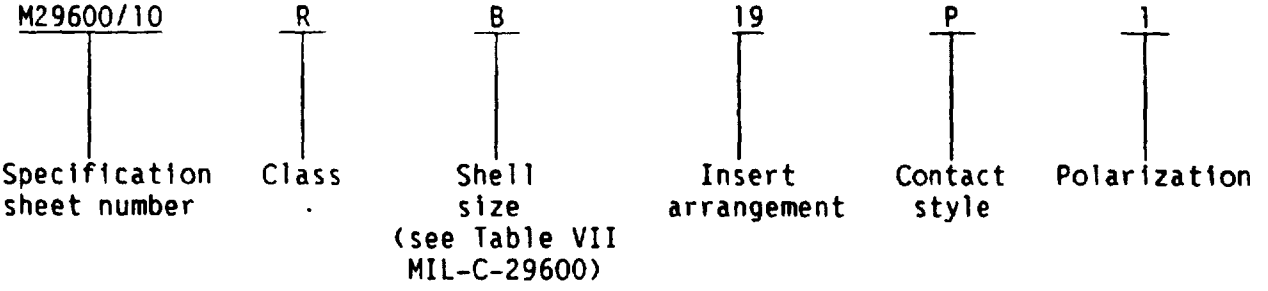

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - AV
Navy - EC
Air Force - 15
DLA - ES
NASA - NA

User activities
Army - MI
Navy - SH, MC
Air Force - 15

Preparing activity:
Navy - AS
(Project No. 5935-3701-04)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:37Z
Check the source to verify that this is the current version before use.