
INCH-POUND
MIL-C-29600/11
20 December 1989

MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, CIRCULAR, MINIATURE, COMPOSITE, HIGH DENSITY, QUICK COUPLING, ENVIRONMENT RESISTANT, REMOVABLE CRIMP CONTACTS, RECEPTACLE, JAM NUT (SERIES A)

This specification is approved for use by all Departments and Agencies of the Department of Defense

The complete requirements for acquiring the connectors described herein shall consist of this specification and the latest revision of MIL-C-29600.

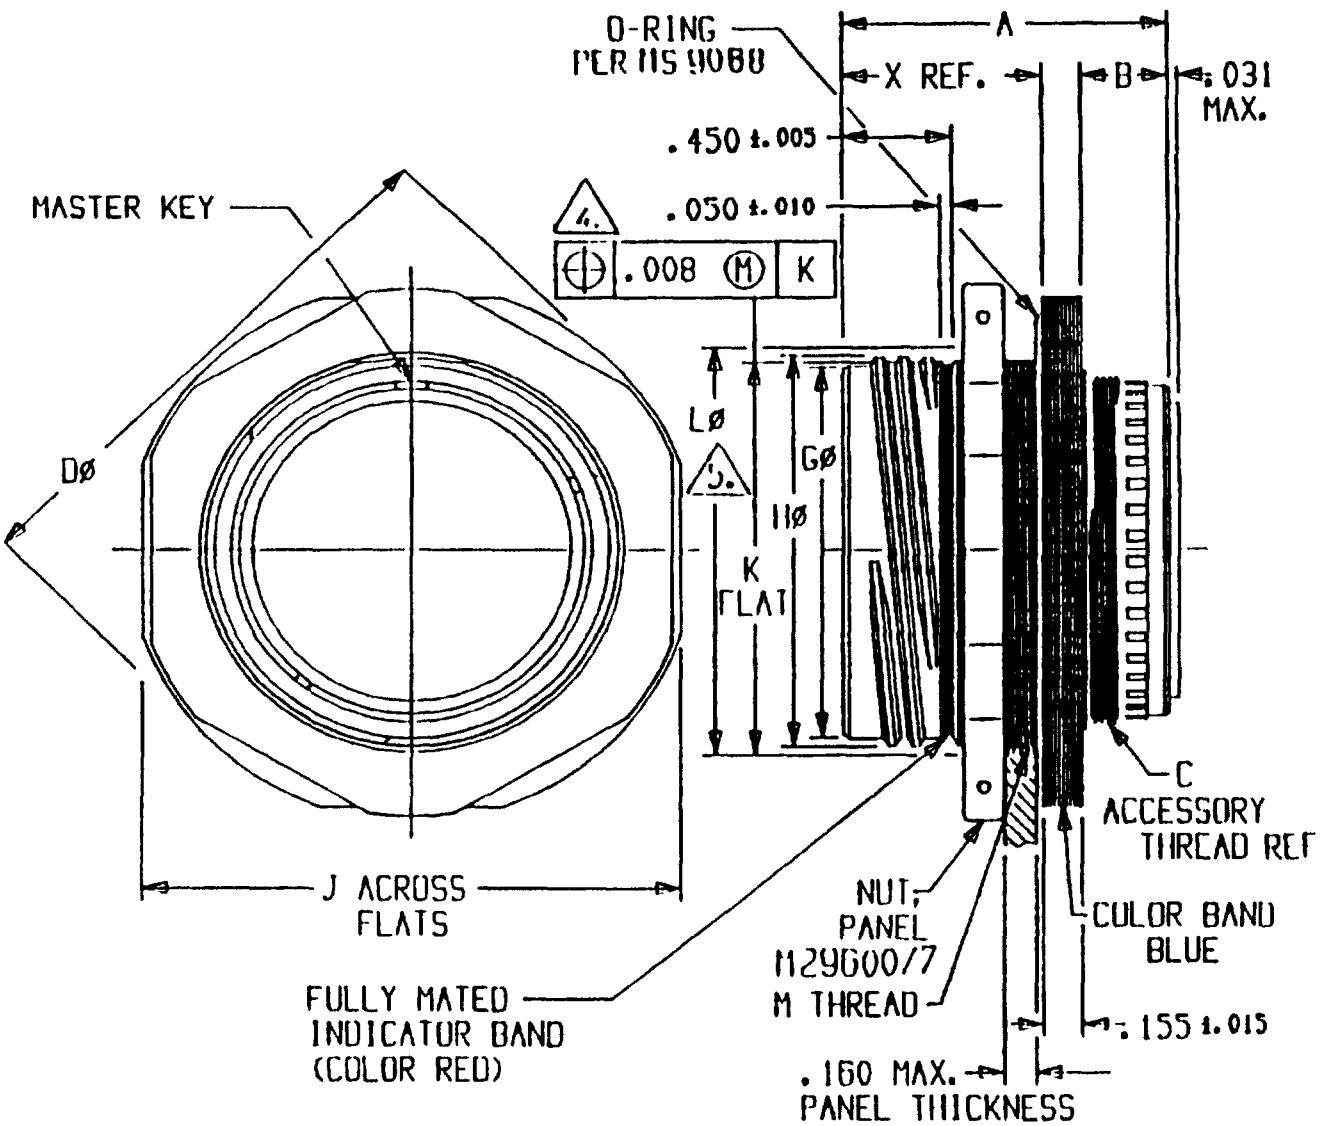

AMSC N/A


FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:37Z
Check the source to verify that this is the current version before use.

NOTES.

1. Dimensions are in inches unless otherwise specified.
2. Metric equivalents are based upon 1 inch = 25.4 mm
3. Dimensions apply after plating.
4. K datum is identified on figure 3 of MIL-C-29600.
5. LØ is the maximum jam nut thread diameter.

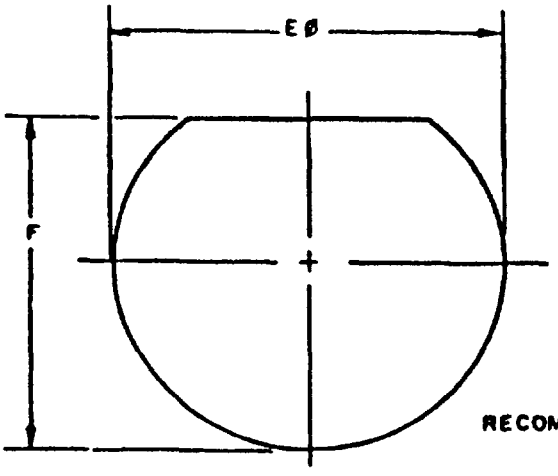

RECOMMENDED PANEL CUTOUT

Shell Size	A ±.010	B ±.005	C Thread Ref	D Ø ±.011	G Ø Ref	X Ref	E+ 000 -.000	F+.000 -.010	H Ø Max
9	1.273	.296	.500-28	1.189	.565	.827	.697	.669	.628
11	1.273	.296	.625-28	1.374	.688	.827	.822	.769	.753
13	1.273	.296	.750-28	1.500	.814	.827	1.007	.955	.878
15	1.273	.296	.875-28	1.626	.938	.827	1.134	1.084	1.003
17	1 273	.296	1.000-28	1.752	1.109	.827	1.259	1.208	1.190
19	1.273	.287	1.125-28	2.063	1.297	.827	1.507	1.459	1.378
21	1.273	.296	1.250-28	2.189	1.422	.818	1.634	1.584	1.503
23	1.273	.296	1.375-28	2.311	1.547	.818	1.759	1.709	1.628
25	1.273	.296	1 500-28	2.311	1.609	.818	1.759	1.709	1.690

Shell Size	J ± 006	K Max	L Ø Max	M Thread	MS9068 dash No	Torque Values (in/lb)
9	1.063	.655	691	M17X1.0-0.100R	-019	60
11	1.252	.755	.817	M20X1.0-0.100R	-022	73
13	1.374	.942	1.006	M25X1.0-0.100R	-024	100
15	1.500	1.066	1.128	M28X1.0-0.100R	-026	113
17	1.626	1 192	1 263	M32X1.0-0.100R	-028	153
19	1.937	1 442	1.499	M38X1.0-0.100R	-130	187
21	2.063	1.566	1.628	M41X1.0-0.100R	-132	213
23	2.189	1 692	1 754	M44X1 0-0.100R	-134	233
25	2 189	1.692	1.754	M44X1.0-0.100R	-134	250

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:37Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.005	.127	.817	20.752	1.190	30 226	1.547	39.294
.006	.152	.818	20 777	1.192	30 277	1.566	39 776
.010	.254	827	21.006	1.252	31.801	1.609	40.869
.011	.279	.878	22.301	1.263	32 080	1.626	41.300
.287	7.290	.938	23 825	1.273	32 334	1.628	41.351
.296	7 518	.942	23.927	1.297	32 944	1.690	42.926
.565	14.351	1 003	25 476	1.374	34.900	1.692	42.977
.628	15.951	1 006	25.552	1 378	35 001	1.752	44 501
.655	16.637	1.063	27.000	1.422	36.119	1.754	44.552
.688	17.475	1.066	27.076	1.442	36.627	1.937	49.200
.691	17.551	1 109	28.169	1.499	38.075	2.063	52.400
.753	19.126	1.128	28.651	1 500	38 100	2.189	55.601
.755	19.177	1.189	30.201	1.503	38.176	2.311	58 699
.814	20.676						

REQUIREMENTS:


Requirements shall conform to MIL-C-29600

Mating plug: MIL-C-29600/12

Maximum Jam-nut torque values. Maximum torque values shall not exceed the values shown in the table

O-ring: Use MS9068 per table

Example of part number:

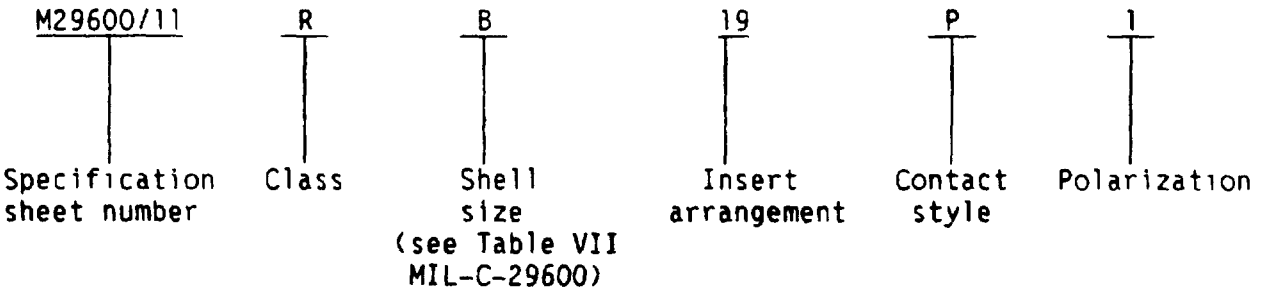

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:37Z
Check the source to verify that this is the current version before use.

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - AV
Navy - EC
Air Force - 15
DLA - ES
NASA - NA

User activities:
Army - MI
Navy - SH, MC
Air Force - 15

Preparing activity:
Navy - AS
(Project No. 5935-3701-05)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:37Z
Check the source to verify that this is the current version before use.