INCH-POUND
MIL-C-29600/5
22 February 1990

MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, CIRCULAR, MINIATURE, COMPOSITE, HIGH DENSITY, QUICK COUPLING, SELF LOCKING, ENVIRONMENTAL RESISTANT, REMOVABLE CRIMP CONTACTS, DUST COVER (SERIES A)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the dust cover described herein shall consist of this specification and the latest revision of MIL-C-29600.

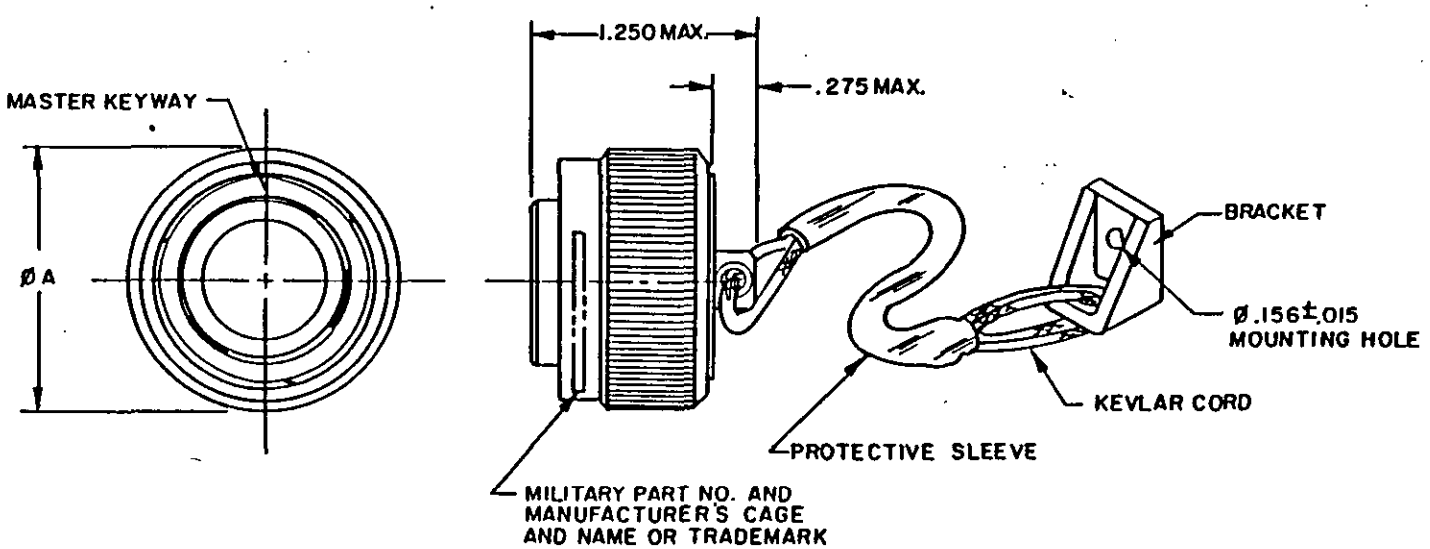


FIGURE 1. Dust cover.

NOTES:

1. Dimensions are in inches unless otherwise specified.
2. Metric equivalents are based on 1 inch = 25.4 mm.

AMSC N/A FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:35Z
Check the source to verify that this is the current version before use.

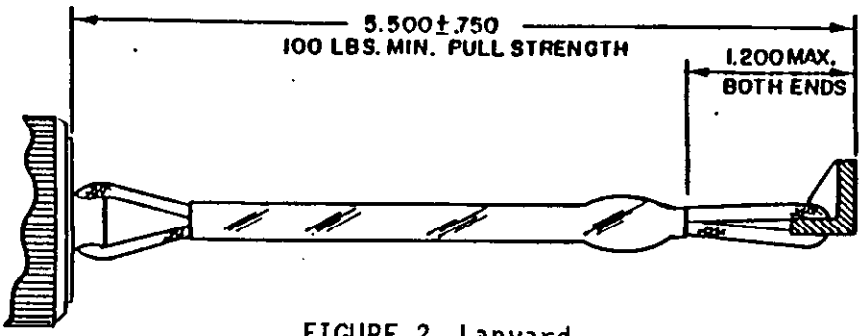


FIGURE 2. Lanyard.

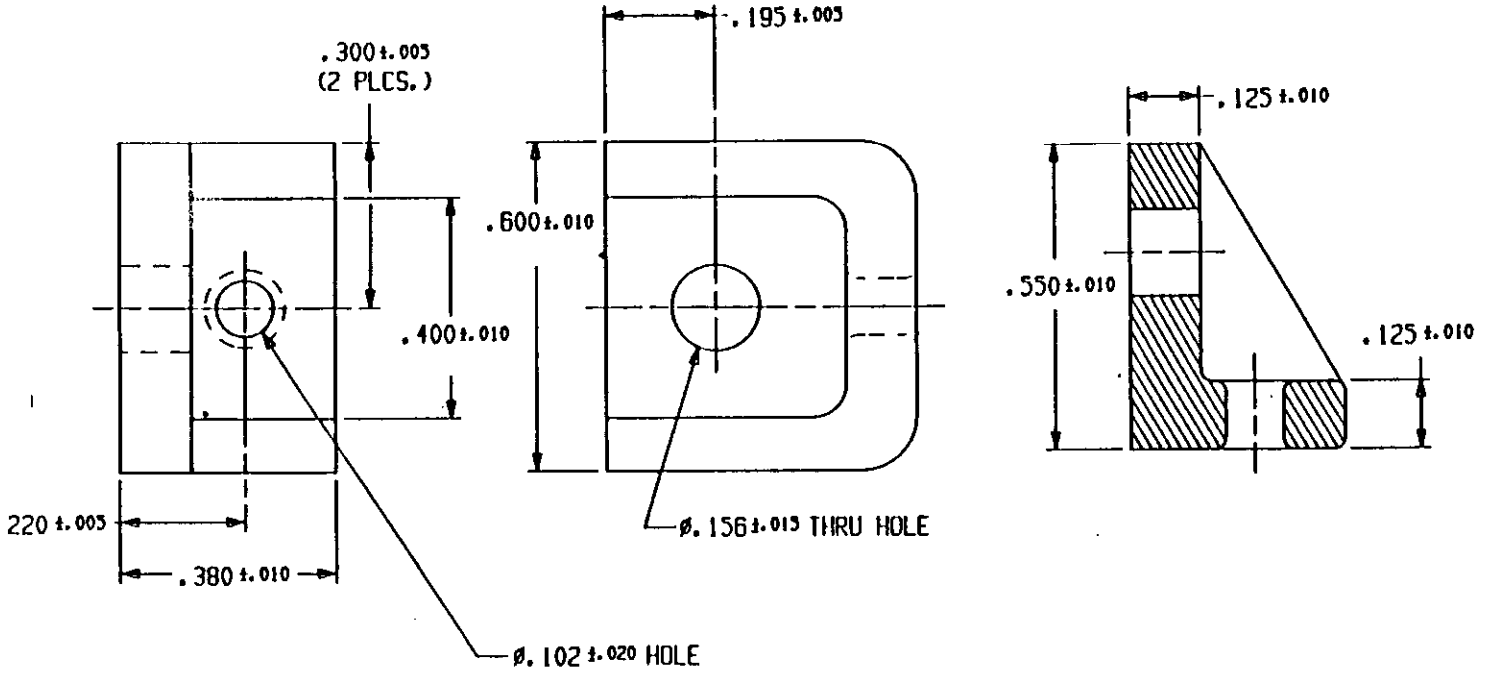


FIGURE 3. Bracket.

TABLE I. Dimensions.

Shell Size	Shell size code letter 1/	A Max. 2/
08-09	A-B	.862 (21.894)
10-11	C-D	1.005 (27.953)
13	E-F	1.164 (29.566)
14-15	G-H	1.260 (32.004)
16-17	J-K	1.435 (36.449)
18-19	M-N	1.642 (41.707)
20-21	P-R	1.769 (44.933)
22-23	S-T	1.896 (48.158)
24-25	U-W	1.960 (49.784)

1/ See MIL-C-29600 Table VI.
2/ Metric equivalents are in parenthesis.

Source: https://assist.dla.mil - Downloaded: 2026-10-21T00:35Z
Check the source to verify that this is the current version before use.

TABLE II. Qualification.

Inspection	MIL-C-29600 Requirement Paragraph	MIL-C-29600 Test Paragraph
Examination of product	3.1 thru 3.5, 3.41 and 3.42	4.6.1
Fastener tensile strength	MIL-C-29600/5	MIL-C-29600/5
Coupling torque	3.9	4.6.4
Temperature cycling	3.8	4.6.3
Plating adhesion	3.37	4.6.32
Air leakage	MS25042	MS25042
Examination of product	3.1 thru 3.5, 3.41 and 3.42	4.6.1

REQUIREMENTS:

Requirements shall conform to MIL-C-29600.

Dimensions: See Table I.

Design characteristics and configuration: See Figures 1 , 2 and 3.

Fastener tensile strength: The protective cover and cord assembly shall withstand a tensile load of 100 pounds. The load shall be applied in both the axial and longitudinal directions with respect to the protective cover. The load shall be applied between the protective cover and the mounting bracket.

Qualification: See Table II.

Note: This item is a non polarized, universal dust cover.

Example of part number:

M29600/5 — Specification sheet number

M — Shell size code letter

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:35Z
Check the source to verify that this is the current version before use.

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review Activities:
Army - AV
Navy - EC
Air Force - 15
DLA - ES
NASA - NA

User Activities:
Army - MI
Navy - SH,MC
Air Force - 15

Preparing activity:
Navy - AS
(Project No. 5935-3701-17)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:35Z
Check the source to verify that this is the current version before use.