INCH-POUND
MIL-C-29600/6
22 February 1990

MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, CIRCULAR, MINIATURE, COMPOSITE, HIGH DENSITY, QUICK COUPLING, ENVIRONMENTAL RESISTANT, REMOVABLE CRIMP CONTACTS, STOWAGE RECEPTACLE (SERIES B)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the stowage receptacles described herein shall consist of this specification and the latest revision of MIL-C-29600.

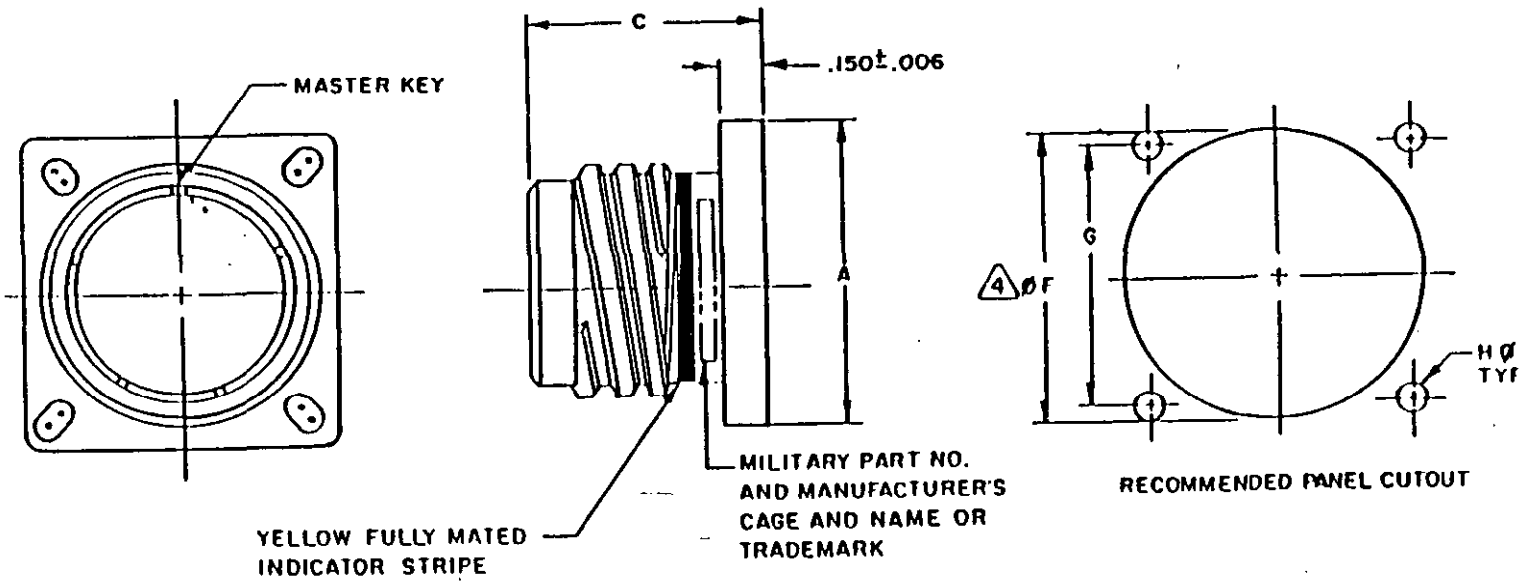


FIGURE 1. Dummy stowage receptacle.

NOTES:

1. Dimensions are in inches unless otherwise specified.
2. Metric equivalents are based on 1 inch = 25.4 mm.
3. See MIL-C-29600 for interface dimensions.
4. ØF applies only for back panel mounting.

AMSC N/A FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:36Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions.

Shell Size	Shell Size Letter Code 1/	A ±.010	C Max.	Ø F ±.010	G ±.005	HØ TYP +.005 -.002
08-09	A-B	.939	1.010	.656	.719	.128
10-11	C-D	1.034	1.010	.781	.812	.128
-- 13	F	1.131	1.010	.907	.906	.128
14-15	G-H	1.225	1.010	1.031	.969	.128
16-17	J-K	1.318	1.010	1.218	1.062	.128
18-19	M-N	1.568	1.010	1.405	1.250	.128
20-21	P-R	1.694	1.001	1.530	1.375	.154
22-23	S-T	1.814	1.001	1.655	1.500	.154
24-25	U-V	1.814	1.001	1.718	1.500	.154

1/ See MIL-C-29600 Table VI.

Inches	mm	Inches	mm	Inches	mm
.128	3.251	1.001	25.425	1.375	34.925
.154	3.921	1.010	25.654	1.405	35.687
.656	16.662	1.031	26.187	1.500	38.100
.719	18.263	1.034	26.264	1.530	38.862
.781	19.837	1.062	26.975	1.568	39.827
.821	20.853	1.131	28.727	1.655	42.037
.906	23.012	1.218	30.937	1.694	43.028
.907	23.038	1.225	31.115	1.718	43.637
.939	23.851	1.250	31.750	1.814	46.076
.969	24.613	1.318	33.477		

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:36Z
Check the source to verify that this is the current version before use.

TABLE II. Qualification.

Inspection	MIL-C-29600 Requirement Paragraph	MIL-C-29600 Test Paragraph
Examination of product	3.1 thru 3.5, 3.41 and 3.42	4.6.1
External bending moment	3.17	4.6.12
Vibration	3.22	4.6.17
Shock	3.23	4.6.18
Coupling torque	3.9	4.6.4
Salt spray (2000 hours)	3.15	4.6.10.1
Plating adhesion	3.37	4.6.32
Impact	3.38	4.6.33
Temperature cycling	3.8	4.6.3
Air leakage	MIL-C-29600/6	MIL-C-29600/6
Examination of product	3.1 thru 3.5, 3.41 and 3.42	4.6.1

REQUIREMENTS:

Requirements shall conform to MIL-C-29600.

Dimensions: See Table I.

Design characteristics and configuration: See Figure 1 and 2.

Thread: See Figure 1.

Polarization: Polarization of keys and keyways shall be as specified in MIL-C-29600, Figures 3 and 8.


Qualification: See Table II.

Source: https://assist.dla.mil - Downloaded: 2026-10-21T00:36Z
Check the source to verify that this is the current version before use.

REQUIREMENTS (continued):

Air leakage: When tested in accordance with MIL-STD-1344, method 1008, the air leakage rate shall not be greater than one atmospheric cubic inch per hour (.455 cubic centimeters per second). The leakage rate does not apply through the flange and the mounting surface area. A qualified mating plug shall be utilized for running this test.

Example of part number:

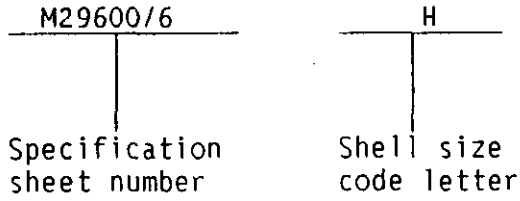

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review Activities:
Army - AV
Navy - EC
Air Force - 15
DLA - ES
NASA - NA

User Activities:
Army - MI
Navy - SH,MC
Air Force - 15

Preparing activity:
Navy - AS
(Project No. 5935-3701-18)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:36Z
Check the source to verify that this is the current version before use.