# MILITARY SPECIFICATION SHEET

## CONNECTORS, ELECTRICAL, CIRCULAR, MINIATURE, COMPOSITE, HIGH DENSITY, QUICK COUPLING, THREADED, ENVIRONMENT RESISTANT, REMOVABLE CRIMP CONTACTS, NUT, HEXAGON, CONNECTOR MOUNTING

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the connectors described herein shall consist of this specification and the latest revision of MIL-C-29600.

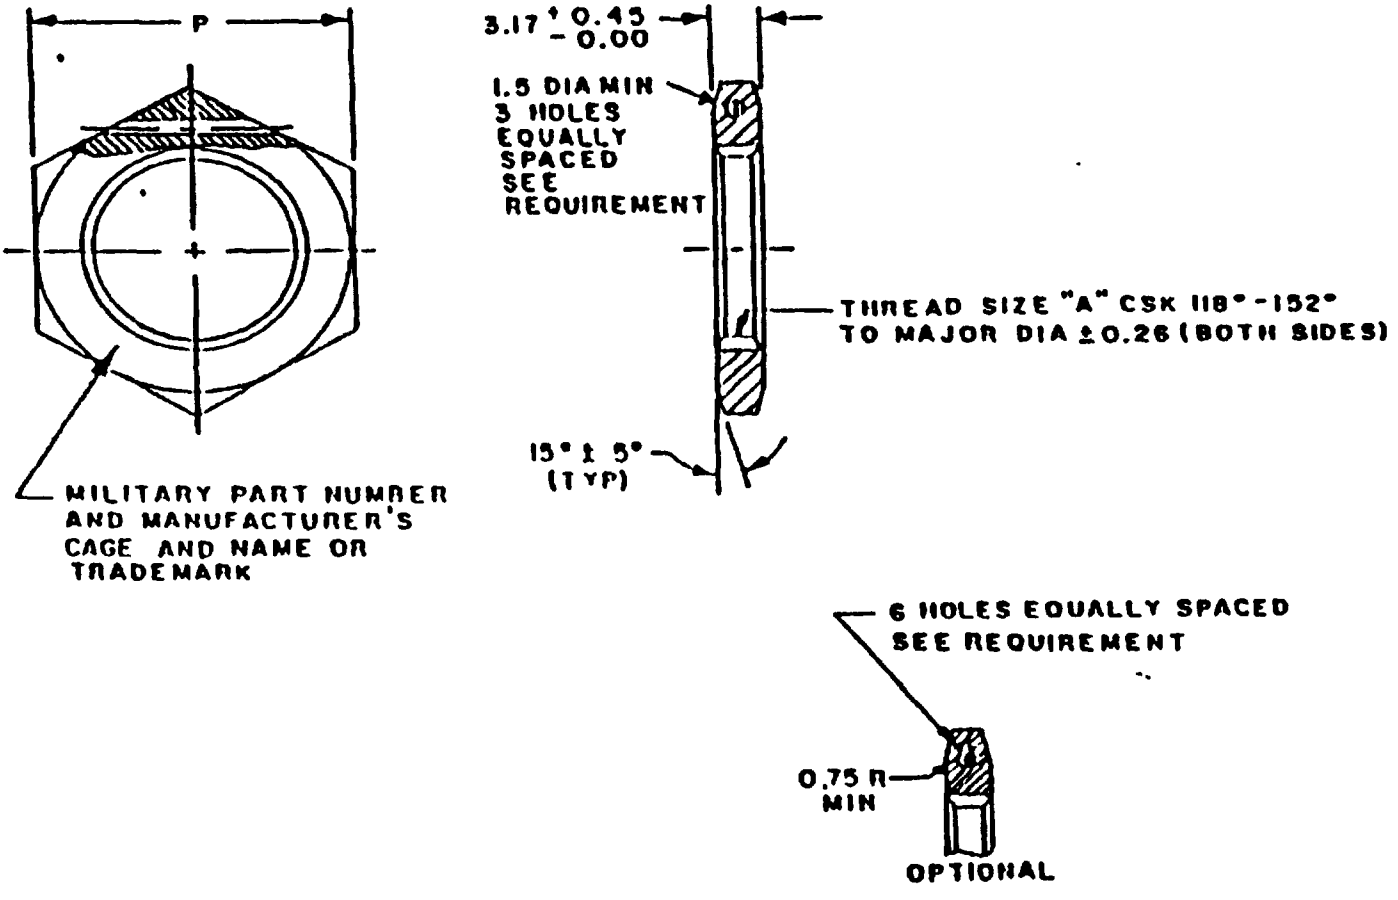



FIGURE 1. Nut, hexagon.

AMSC N/A FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:36Z
Check the source to verify that this is the current version before use.

| Dash No. | Shell Size | | A Thread Size | (Metric) P Hex | Torque Value(in/lb) |
|---|---|---|---|---|---|
| 1 | 8 | 9 | M17X1.0-0.100R | 21.82<br>24.00 | 60 |
| 2 | 10 | 11 | M20X1.0-0.100R | 24.99<br>27.00 | 73 |
| 3 | -- | 13 | M25X1.0-0.100R | 29.77<br>32.00 | 100 |
| 4 | 14 | 15 | M28X1.0-0.100R | 32.91<br>36.00 | 113 |
| 5 | 16 | 17 | M32X1.0-0.100R | 36.12<br>37.00 | 153 |
| 6 | 18 | 19 | M38X1.0-0.100R | 42.47<br>46.00 | 187 |
| 7 | 20 | 21 | M41X1.0-0.100R | 45.61<br>50.00 | 213 |
| 8 | 22 | 23 | M44X1.0-0.100R | 49.25<br>51.23 | 233 |
| 9 | 24 | 25 | M44X1.0-0.100R | 49.25<br>51.23 | 250 |

| Inches | mm |
|---|---|
| .01 | 0.254 |
| .26 | 6.60 |
| .45 | 11.43 |
| 1.500 | 38.10 |
| 3.17 | 80.52 |

NOTES:

1. Dimensions are in inches, unless otherwise specified.
2. Metric equivalents are based on 1 inch = 25.4 mm.
3. Dimensions apply after plating.

REQUIREMENTS:

Dimensions and configuration: See Figure 1.

Material: See MIL-C-29600.

Applicable connectors: MIL-C-29600/21 and /11.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:36Z
Check the source to verify that this is the current version before use.

REQUIREMENTS: (continued)

Safety wire hole pullout: Safety wire holes shall not pull out when safety wire Ni-Cu alloy (Monel) or Ni-Cr alloy (Inconel) 0.51 mm diameter in accordance with MS20995 is threaded through a hole and a pull of 133.5 N minimum is applied. Three pulls shall be made, one parallel with axis of nut in each direction and one perpendicular to axis of nut.

Maximum installation torque: See Table.

QUALIFICATION:


Examination of product.

Safety wire hole pull out (see requirement).

Examination of Product.

When installed on applicable connectors, qualification shall be as specified on the applicable connector specification sheet, with the addition of safety wire hole pullout.

Part number example:

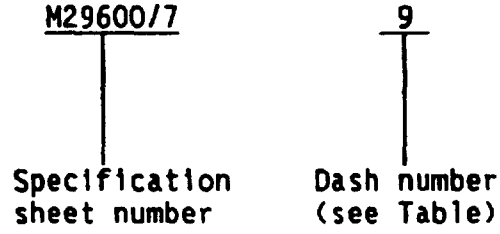


Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - AV
Navy - EC
Air Force - 15
DLA - ES
NASA - NA

User activities:
Army - MI
Navy - SH,MC
Air Force - 15

Preparing activity:
Navy - AS
(Project No. 5935-3701-19)



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:36Z
Check the source to verify that this is the current version before use.