
MILITARY SPECIFICATION SHEET

VALVE, AIR VENT, AUTOMATIC, LOW PRESSURE, MANIFOLD MOUNT

This specification sheet is approved for use by the Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-V-29592(AS).

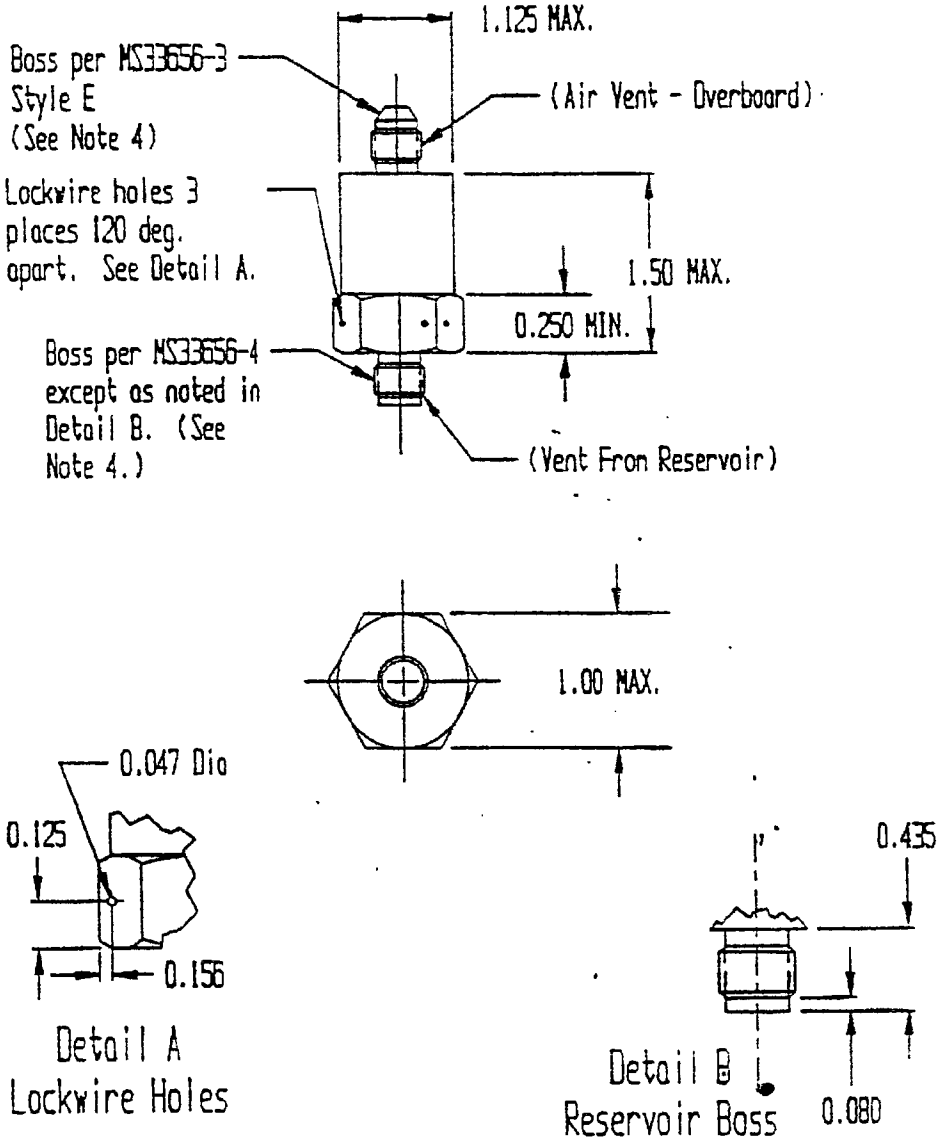

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:25Z
Check the source to verify that this is the current version before use.

TABLE I. Automatic air vent valve characteristics.

Dash Number	Reservoir Operating Pressure (psi)		Maximum Oil Expulsion Rate at Room Temp. (ml per cycle)	Minimum Air Flow at Minimum Pressure and Room Temp. (SCC/min)
	MAX.	MIN.		
-1	120	85	0.8	700
-2	84	60	0.8	600
-3	59	40	0.8	500

1. Materials: Aluminum Alloy \ See procurement
Corrosion Resistant Steel / specification

2. Finish: Aluminum Alloy: Anodize per MIL-A-8892.
Corrosion Resistant Steel: Surface shall be treated and passivated per QQ-P-35.

3. The torque test of the general specification shall be performed with a torque value of 120 in-lb. Valves that have body halves attached together utilizing screw threads that are lock-wired shall be exempt from this test.

NOTES:

1. Dimensions are in inches. Unless otherwise specified, tolerances: decimals: ±.010, angles ±1°.

2. Remove all burrs and break all sharp edges .005 minimum.

3. Unless otherwise specified, surface roughness shall not exceed 125 micro-inches R_a per ANSI/ASME B46.1.

4. External dimensions for the MS33656 ports shall be per the applicable specification. The internal dimensions may be modified for installation of valve components. The inlet of the valve shall only be installed in an MS33649 port. No tube connection utilizing MIL-F-5509 fittings shall be made to the reservoir connection. Connections to the outlet shall utilize flared fittings per MIL-F-5509.

5. The part number shall consist of the letter M the basic number of this specification sheet, the slash number of this specification sheet and the dash number as selected from Table I.

6. Example of part numbers: M29592/1-3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:25Z
Check the source to verify that this is the current version before use.