INCH-POUND

A-A-52307
17 November 1993

COMMERCIAL ITEM DESCRIPTION

PUMP, RECIPROCATING, HAND-DRIVEN, SINGLE-ACTING, BILGE

The General Services Administration has authorized the use of this commercial item description in preference to MIL-P-52235.

This item description covers a hand-operated, single-acting, reciprocating, bilge pump.

Salient characteristics.

General. The pumps shall conform to all Federal laws and regulations applicable for this type equipment which are in effect on date of award of contract.

Materials. The pump shall be fabricated from compatible materials, inherently corrosion resistant or treated to provide protection against the various forms of corrosion and deterioration that may be encountered in any of the applicable operation and storage environments to which the pump may be exposed. Dissimilar metals shall not be used in intimate contact with each other unless protected against galvanic corrosion.

Design and performance. The pump shall consist of a cylinder, a strainer foot with integral valve, a piston with rod and handle, a cylinder cap with integral discharge spout. The piston cup, strainer foot, and cylinder cap shall be synthetic rubber. The cylinder shall be heavy seamless copper alloy tubing. The cylinder ends shall be rolled to provide a pressure tight sealing device. The piston shall be a molded synthetic rubber cup, reinforced with a copper alloy plate, and affixed to a tapped and threaded copper alloy piston rod. The piston cup shall be removable from the piston rod end without stretching. The handle shall be D-shape, rigid plastic or copper alloy, and shall be tapped and threaded to accommodate the threads on the upper end of the piston rod. The handle inner dimensions shall be not less than 2 inches by 5 inches. The strainer foot with integral valve shall be molded from synthetic rubber and shall be grooved to fit the rolled end of the cylinder. The cylinder

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and other data which may improve this document should be sent by letter to: US ARMY BELVOIR RDE CTR, ATTN SATBE TSE, 10101 GRIDLEY RD STE 104, FT BELVOIR VA 22060-5818.

AMSC N/A FSC 4320
DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:08Z
Check the source to verify that this is the current version before use.

cap with integral discharge spout shall be synthetic rubber molded in one piece, and grooved to fit the rolled end of the cylinder. The discharge spout shall be copper alloy tubing, sized to receive and retain by friction, a 1 inch inside diameter synthetic rubber hose. A 1 inch inside diameter synthetic rubber hose 60 inches in length shall be furnished with each pump. The pump shall be capable of pumping at lease one US gallon of water in eight cycles. The maximum dimensions of the pump shall be as shown on figure 1. The valve shall be labeled with a double-ended arrow Indicating open and closed positions. The pump inlet and outlet shall be clearly labeled for identification. The pump, complete with discharge hose, shall not exceed five pounds.

Regulatory requirements. In accordance with Federal Acquisition Regulation, section 23.403, the Government's policy is to acquire items composed of the highest percentage of recovered materials practicable, consistent with maintaining a satisfactory level of competition without adversely affecting performance requirements or exposing the suppliers employees to undo hazards from the recovered materials.

Preservation, packaging, packing, labeling, and marking. The preservation, packaging, packing, labeling, and marking shall be as specified in the contract or order.

Quality assurance Provisions. Each pump shall be examined for the following defects. Presence of one or more defects shall be cause for rejection.

a. Materials not resistant to corrosion or deterioration.
b. Dissimilar metals not protected against galvanic corrosion.
c. Pump design not as specified.
d. Pump performance not as specified.
e. Level of preservation, packaging, packing, and marking not as specified in the contract or order.
f. Optional/additional equipment or accessories not as specified in the contract or order.

Certification: Unless otherwise specified, the contractor shall certify that the pumps offered meet the salient characteristics of this item description and that the pumps conform to the producer's own drawings, specifications, standards and quality assurance practices and is the same pumps offered by the contractor in the commercial marketplace for at least one year preceding the solicitation. Prior to delivery, the Government reserves the right to require proof of such conformance and to perform any inspections as may be necessary to assure the pumps conform to the requirements as stated herein.

Notes: The procuring agency should specify the preferred options permitted herein and include the following information in procurement documents:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:08Z
Check the source to verify that this is the current version before use.

1. Title, number, and date of this item description.
2. Level of preservation, packaging, and packing required.
3. Any special marking.
4. When this commercial item description is used for procurement, the certification clause must appear in the solicitation.
5. What optional/additional equipment or accessories are needed to satisfy military requirements.

The preparing activity for this item description is: US ARMY BELVOIR RDE CTR, ATTN SATBE TSE, 10101 GRIDLEY RD STE 104, FT BELVOIR VA 22060-5818.

CIVIL AGENCY COORDINATING
GSA - FSS

Custodian:
Army - ME

Preparing activity:
Army - ME

Review activity:
DLA - CS

Project 4320-0349

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:08Z
Check the source to verify that this is the current version before use.

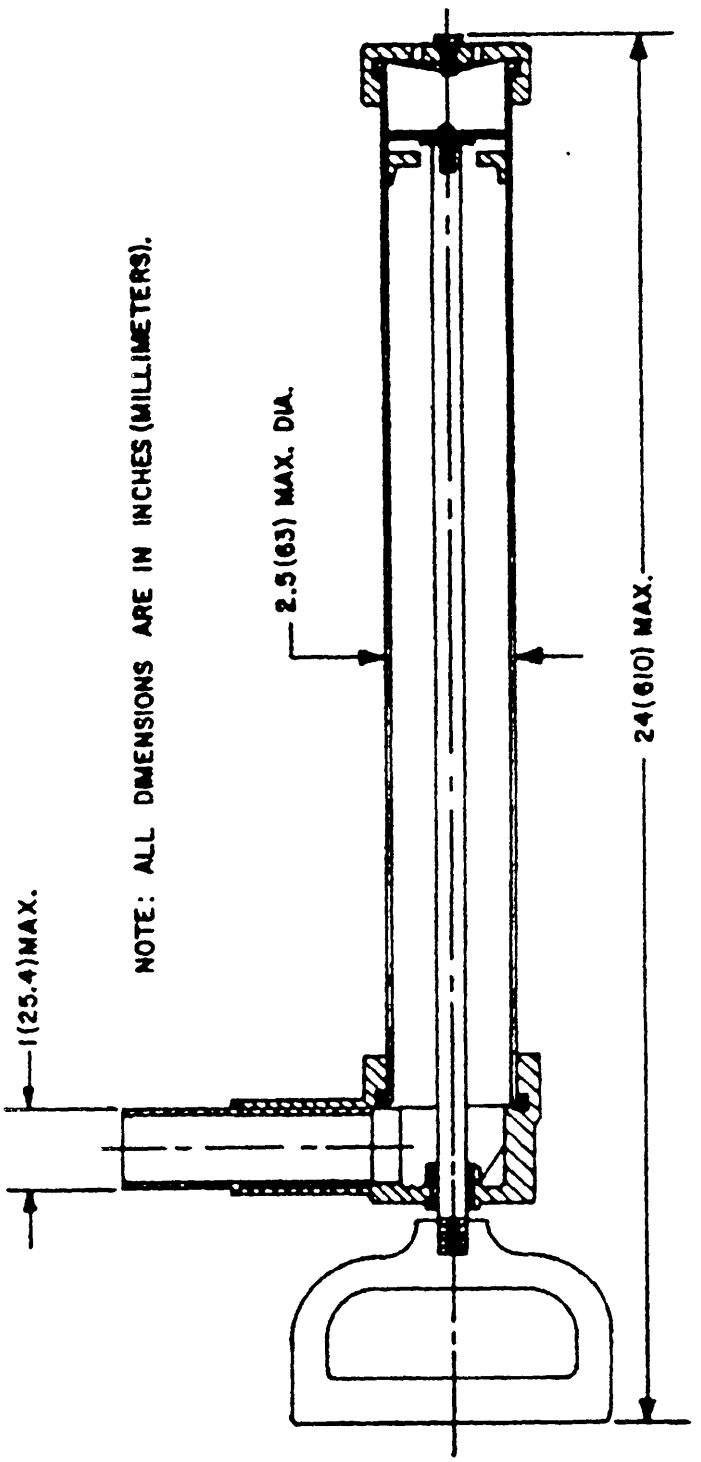

FIGURE 1. Schematic drawing for information only, configuration of pump is not mandatory.

X-3350A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:08Z
Check the source to verify that this is the current version before use.