[INCH-POUND]
A-A-2864
May 18, 1994

COMMERCIAL ITEM DESCRIPTION

FLAG, NATIONAL, UNITED STATES OF AMERICA, INDOOR SET

The General Services Administration has authorized the use of this commercial item description as a replacement for Federal Specification DDD-F-410 which has been canceled.

1. SCOPE

1.1 Scope. This commercial item description covers requirements for United States of America National Flag sets for indoor use, consisting of U. S. Flag with fringe, cord and tassels, flagpole, stand and ornaments.

2. CLASSIFICATION

2.1 Classification. The flag sets covered by this commercial item description shall be of the following types and sizes as specified (see 7.3).

Type I - Flag set with metal accessories.
Type II - Flag set with plastic accessories.

Size 1 - 9 foot pole (4'4" hoist by 5' 6" fly flag)
Size 2 - 7 foot pole (3' hoist by 5' 8-3/8" fly flag)

3. SALIENT CHARACTERISTICS

3.1 Preproduction sample. When specified, before production is commenced, a preproduction sample of the flag set shall be submitted to the Government representative for approval.

3.2 Design and construction.

3.2.1 Flag. Except as otherwise specified herein, the U. S. Flag shall be in accordance with DDD-F-416, type II heading; heavyweight (3.6 oz./sq. yd.(122 gm/sq.m)) nylon bunting with machine power embroidered stars, Schiffli or equal.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data which may improve this document should be sent to: General Services Administration, Engineering Group (7FXEE), 819 Taylor St., Fort Worth, TX 76102

DISTRIBUTION STATEMENT A : Approved for public release; distribution is unlimited.

FSC 8345

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:26Z
Check the source to verify that this is the current version before use.

The flag heading shall be stamped "U. S. PROPERTY" or "U. S. PROP." or have a sewn label attached inside the heading, and shall have a fringe in accordance with 3.2.2, attached as specified in 3.2.1.3.1.

3.2.1.1 Dimensions. The dimensions of the size 1 flag shall be 4 feet 4 inches (hoist) by 5 feet 6 inches (fly) (1.32 m X 1.68 m) in accordance with the "Special Sizes" of Figure 1, DDD-F-416, except that under "K +", the stars may measure 2-3/8 inches (60.3 mm). The dimensions of the size 2 flag shall be 3 feet (hoist) by 5 feet 8-3/8 inches (fly) (0.91 m X 1.74 m) in accordance with the "Standard Sizes" of Figure 1, DDD-F-416.

3.2.1.2 Heading. The heading shall conform to type II of DDD-F-416, except that a twill weave, unbleached, napped on the filling side (10 oz./sq.yd. min. (339 gm/sq.m)) cotton canton flannel may be used as an alternate to cotton sheeting.

3.2.1.3 Stitches, seams and stitchings. Stitches, seams, and stitchings shall be in accordance with DDD-F-416, except that:

(a) Hems and seams shall be sewn with not less than 10 stitches per inch (2.54 cm).
(b) Stitching gauge shall be not less than 1/8 inch (3.2 mm) for joining stripes and horizontal seam between stripes and union.

The ends of all stitching when not caught in other seams or stitching shall be backstitched for a distance of 1 inch minimum (2.54 cm) or bartacked with a 9/16 inch (14.3 mm), 28 stitch bartack.

3.2.1.3.1 Stitching of fringe. Stitching of fringe shall be in accordance with DDD-F-416, except that hems may be on the back side of the flag, in which case stitching type EFb-1 shall be used for the top and bottom edge (3/16 inch (4.8 mm) wide hem with a 1/8 inch (3.2 mm) turnunder), and stitching type EFb-2 shall be used for the fly edge (3/8 inch (9.5 mm) wide hem with a 1/4 inch (6.4 mm) turnunder).

3.2.1.4 Thread.

3.2.1.4.1 Embroidery thread. The embroidery thread for the stars shall be a semidull, continuous filament, regenerated cellulose type rayon, two ply Schiffli type. The single yarn shall be 150 denier rayon.

3.2.1.4.2 Sewing thread. The thread used for sewing stripes, seams and hems shall be polyester thread; twisted soft or bonded multiple cord, normal elongation, size B, 2 or 3 ply. The color of the thread shall match the color of the material except that the red thread may be used for the hem on the fly end, and to close the heading.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:26Z
Check the source to verify that this is the current version before use.

3.2.1.4.3 Rayon/acetate yarn. When specified, rayon/acetate yarn shall be either a 600 to 625 denier acetate, continuous multifilament bright viscose rayon or cuprammonium rayon.

3.2.1.4.4 Cotton yarn. When specified, cotton yarn shall be 12/2 cotton yarn.

3.2.2 Fringe, cord and tassels. The color of the fringe, cord and tassels shall match Cable No. 80068 of the Standard Color Reference of America, Tenth Edition. The dyed material shall show good colorfastness to light and wet-dry cleaning when tested in accordance with AATCC 16A and 132, respectively.

3.2.2.1 Fringe. The design of the fringe shall be a woven heading with bullion formed by twisting two picks in the same shed sufficiently so that they twist upon themselves flush up to the heading. The overall length of the fringe shall measure 2 to 2-5/8 inches (50.8 mm - 66.7 mm). The filling yarn, which is used to form the bullion, shall be made by twisting together two ends of cotton yarn and shall be wound with a sufficient number of ends of rayon yarn to completely cover the cotton yarn. The bullion shall be formed with not less than five turns per inch (2.54 cm) of Z twist. There shall be no less than 11 bullions per inch (2.54 cm). The heading shall be constructed from single ends of rayon yarn and shall be woven with a float stripe centered in the heading. The heading shall be woven with a sufficient number of ends to finish a minimum of 5/16 inch (7.9 mm) in width and completely cover the picks on both sides of the heading throughout the width specified. The float stripe shall finish a minimum of 3/32 inch (2.4 mm) in width on both sides of the heading.

3.2.2.2 Cords and tassels. The design of the cord and tassels shall be a twisted cord with a tassel attached at each end. The wood for the mold shall be clear, well seasoned, free from checks or other defects. Any of the woods listed in 3.2.3.1 may be used.

3.2.2.2.1. Cord. The cord for the size 1 flag set (including tassels), shall be 106 to 110 inches in overall length (2.7 to 2.8 m) and 1/4 ± 1/16 inch (6.4 mm ± 1.6 mm) in diameter. The cord for the size 2 flag set (including tassel) shall be 96 to 108 inches in overall length (2.4 to 2.7 m) and 1/4 ± 1/16 inch (6.4 mm ± 1.6 mm) in diameter. The cord shall be constructed of three strands twisted together and shall have one turn of twist per inch (2.54 cm). Each strand shall have a minimum of 28 ends of cotton yarn as a core, which is wound with a sufficient number of ends of rayon yarn to completely cover the core.

3.2.2.2.2 Tassels. The tassels shall consist of a braided covered wood mold and at the bottom of the mold shall be attached a fringe or skirt. The tassel ornament for the size 1 flag set shall be 6 to 8 inches in overall length (15.2 to 20.3 cm), and for the size 2 flag set, shall be 4 to 6 inches (10.2 to 15.2 cm) in overall length.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:26Z
Check the source to verify that this is the current version before use.

Approximately one half of the tassel ornament length shall compose the fringe or skirt. The tassel shall be of the normal commercial shape and design with centerhole throughout and shall be completely covered with rayon braiding. The fringe shall contain 52 ± 2 shots of bullion. The bullion shall be composed of cord of five ends of cotton yarn as a core which is wound with a sufficient number of ends of rayon yarn to completely cover the core. The formed bullion shall be of two-ply construction and no less than 3/32 inch (2.4 mm) in diameter and shall have a minimum of three turns per inch (2.54 cm). The heading of the skirt shall be lashed together by a sufficient number of wraps of polyester yarn to securely fasten the bullion. The crouse cord shall have a corkscrew twist effect, evenly spaced and consisting of eight strands divided into four sections equidistant around the circumference of the braided covered wood mold. There shall be two strands to each section. Each strand shall be composed of three ends of cotton yarn as a core which is wound with a sufficient number of ends of rayon yarn to completely cover the core and in turn twisted in corkscrew fashion around one end of rayon yarn. Each crouse cord shall be approximately 1/8 inch wide (3.2 mm).

3.2.2.2.3 Assembly. The excessive braid at both ends of the wood mold shall be neatly tucked into the centerhole of the mold and glued with suitable adhesive so as not to impede passage of the cords. The crouse cord with two strands per section shall be securely tucked in on the inside of the mold and securely bound or anchored as necessary at both necks to prevent loosening. The bullion skirt shall be securely tucked in at the head end of the mold and glued to the braid with suitable adhesive to prevent loosening. The finished cord shall be threaded through the centerhole of each tassel component and each end knotted tightly and glued with suitable adhesive to the base of the braided mold.

3.2.3 Pole, Flag.

3.2.3.1 Wood. The pole shall be made from hardwood of either ash, beech, birch, elm, locust, maple, oak or pecan. The wood for the pole shall be clear, straight grained, well seasoned and free from checks or other defects. The wood shall be dried to a maximum moisture content of 9 percent, prior to application of finishing materials. The pole shall be machine turned and sanded smooth. The slope of the grain shall not exceed 1 inch in 12 (2.54 cm in 30.5). Open grain wood shall be filled with natural color filler before staining. The pole shall have a smooth spun gloss finish over a dark oak stain. Lacquer, varnish, or polyurethane shall be applied and controlled to produce a clean, smooth, even film without blisters, pits, or wrinkles. The finish shall not cloud the natural grain of the wood. Tissue paper shall not stick when wrapped around the finished samples, grasped tightly for 60 seconds, and then released.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:26Z
Check the source to verify that this is the current version before use.

3.2.3.2 Metal band with screw joint. The sections of the type I pole shall be joined by means of a two-piece brass tube with screw joint. The overall length of the brass screw joint when assembled shall be 6 to 7 inches (15.2 to 17.8 cm). The edge of the band shall be chamfered so that there will be no rough or ragged edges. The screw joint shall be manufactured from seamless tubing.

3.2.3.3 Plastic band with screw joint. The sections of the type II pole shall be joined by means of a two-piece plastic connector with screw joint. The plastic band with screw joint shall be made of acrylonitrile butadiene styrene (ABS) or other suitable plastic which has been vacuum plated in gold color. The overall length of the plastic tube with screw joint when assembled shall be 6 to 7 inches (15.2 to 17.8 cm). The edges of the band shall have a radius and shall have no rough or ragged edges. The plastic tube with screw joint shall be attached to the pole sections by means of mounting screws. The color of the mounting screws shall approximately match the gold color of the plastic band with screw joint.

3.2.3.4 Pole construction and pole assembly. The flag poles shall have a straight even diameter of 1-1/4 inches (3.2 cm) throughout the length. At the option of the manufacturer, the flag poles may have a slight taper at the top not to exceed 1/4 inch per foot (6.4 mm per 0.3 m).

The pole for the size 1 flag set when assembled shall measure 108 inches ± 3/8 inches (2.7 m ± 9.5 mm) in length. The pole for the size 2 flag set when assembled shall measure 84 inches ± 3/8 inch (2.13 m ± 9.5 mm) in length. The poles shall be in two sections. The top section of the size 1 pole shall measure 60 inches ± 3/16 inch (1.5 m ± 4.8 mm). The bottom section of the size 1 pole shall measure 48 inches ± 3/16 inch (1.2 m ± 4.8 mm). The top section of the size 2 pole shall measure 48 inches ± 3/16 inch (1.2 m ± 4.8 mm). The bottom section of the size 2 pole shall measure 36 inches ± 3/16 inch (0.9 m ± 4.8 mm). The sections shall be joined by means of a metal or plastic band with screw joint, as specified by the type.

All poles shall have a slight taper at the top where the ferrule is placed and at the two ends of the one or two joining sections where the screw joint is placed. The screw joints shall be attached to the pole sections by means of brass mounting screws or rivets. Holes shall be drilled into the pole to receive the required screws and screw ring for attachment of the cord and tassels and shall be of such size to permit the screws and screw ring to be turned without splitting the wood. The screws and ring shall match the brass metal accessories in color. Knobs or buttons shall be attached to the pole for fastening leather tabs fitted into the heading of the flag. The top of the pole shall have a firmly mounted ferrule of cast brass or aluminum alloy casting.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:26Z
Check the source to verify that this is the current version before use.

The ferrule shall be 2 to 3 inches in length (including threads) (50.8 - 76.2 mm), 1.00 to 1.05 inches in diameter (outside) (25.4 to 26.7 mm) and shall have 3/4 inch (19.1 mm) standard pipe threads (14 tpi) with an effective minimum thread length of 5/16 inch (7.9 mm) on top. The brass shall consist of any alloy containing 65 to 85 percent copper. Type II sets may use an ABS or aluminum tab ring with provisions for mounting the cord and tassels and flag to the pole. The tab rings shall be gold in color to approximately match the color of the cord and tassels. On type II flag poles, ferrules will be a part of the ornament.

The ferrule shall have a screw ring mounted through it for the attachment of the cord and tassels. The ferrule, screw ring and any other attaching hardware shall be finished with a gold tinted brass coating, approximately matching the gold of the fringe, cord and tassels. The screws, knobs or buttons (for fastening of the leather or artificial leather tabs) shall be mounted 4 feet 2-3/4 inches ± 1/2 inch (1.29 m ± 12.7 mm) apart for the size 1 pole and 2 feet 10-3/4 inches ± 1/2 inch (0.88 m ± 12.7 mm) for the size 2 pole, with the top one 3/8 to 1/2 inch (9.5 to 12.7 mm) from the lower edge of the ferrule. The screws, knobs, or buttons shall be mounted in line with each other.

3.2.4 Pole ornaments.

3.2.4.1 Type I. The ornaments for the type I flag set shall be made from a solid cast brass or aluminum alloy casting. The brass shall contain 65 to 85 percent copper. The ornaments shall be burnished and polished. The casting shall have a nickel plating followed by a 40 mil coating of gold tinted brass. The ornaments shall be finished with a coat of lacquer or polyurethane. The base of each ornament shall be tapped to accept the ferrule's 3/4 inch (19.1 mm) standard pipe thread of 5/16 inch length (7.9 mm).

3.2.4.2 Type II. The ornaments for the type II flag set shall be made from acrylonitrile butadiene styrene (ABS) which has been vacuum plated in gold color. The ferrule will be an inherent part of the ornaments for type II sets.

3.2.4.3 Eagle ornament. Unless otherwise specified, the ornament shall be an eagle and shall meet the following requirements. The design shall be a spread eagle in accordance with Figure 1 measuring 7 ± 1/4 inches (17.8 cm ± 6.4 mm) in wing spread and 6-1/4 inches, +1/4 inch, -3/8 inch, (15.8 cm, + 6.4 mm, - 9.5 mm) in height (not including the ferrule).

3.2.4.4 Spear ornament. The spear ornament shall be round in shape and made in accordance with Figure 2. It shall measure 6-1/4 inches ± 1/4 inch (15.8 cm ± 6.4 mm) in height (not including the ferrule).

3.2.5 Stand. The stands for the type I and II flag sets shall be round in shape and measure 10-3/4 to 12 inches (27.3 cm to 30.5 cm) in diameter at the base.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:26Z
Check the source to verify that this is the current version before use.

The stands shall have a bore of proper diameter to receive and make the pole secure when inserted. The pole shall fit snugly in the bore of the stand.

3.2.5.1 Type I. The stand for the type I flag set shall be of cast iron, measuring 4-3/8 to 5-3/8 inches (11.1 cm to 13.6 cm) high at the point where the pole is inserted. The stand shall weigh between 17 and 21 pounds (7.7 to 9.5 kg) and shall have a gold anodized spun aluminum alloy shell, unlacquered, and of plain design, approximately matching the gold color of the fringe, cord and tassels. The aluminum shell shall be a minimum thickness of 0.040 inch (1.0 mm). The shell shall be superimposed on the configuration of the stand by a permanent crimping or other suitable operation.

3.2.5.2 Type II. The stand for the type II flag set shall be made from acrylonitrile butadiene styrene (ABS) or other suitable plastic which has been vacuum plated in gold color, approximately matching the gold color of the fringe, cord and tassels. The stand shall measure 5 to 6 inches (12.7 cm to 15.2 cm) in height where the flag pole is inserted. Overall height including ferrule shall be 8 inches ± 1/4 inch (20.3 cm ± 6.4 mm). The stand shall be hollow and capable of being filled with sand for weight.

3.2.6 Hardware finish.

3.2.6.1 Polishing. All exposed sections of hardware shall be polished or buffed to a mirrorlike finish.

3.2.6.2 Lacquering. The exterior of the hardware components, including the edges, shall be lacquered. The dry lacquer film shall be continuous, level and adherent, and free from lint, dust, or other foreign material.

3.3 Workmanship. The flag set (or individual components) shall be constructed uniformly within the tolerances specified and shall be free from defects previously listed.

3.4 Measurement system. The values stated in inch-pound units are to be regarded as the standard. The values stated in parentheses are for informational purposes only.

3.5 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, providing they fall within tolerances specified using conversion tables contained in the latest revision of FED-STD-376, and all other requirements of this document are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request should be made to the specification preparing activity for changes to this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:26Z
Check the source to verify that this is the current version before use.

fringe in accordance with 3.2.2, attached as specified in

3.6 Figures. Figures 1 and 2, incorporated in this Commercial Item Description, are furnished for guidance to the contractor. In the event of conflict between the commercial item description and the figure, the Commercial Item Description shall take precedence.

3.7 Commercial item. The use of the term "commercial item" in this document does not imply that any item or items offered are not required to conform with all requirements specified herein.

4. REGULATORY REQUIREMENTS

4.1 Recovered materials. The offerer/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

5. QUALITY ASSURANCE PROVISIONS

5.1 Contractor certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this Commercial Item Description, and that the product conforms to the producer's own drawings, specifications, standards, and quality assurance practices. The government reserves the right to require proof of such conformance prior to the first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

5.2 Preproduction sample approval. When required, a preproduction sample shall be submitted to the Government for approval. The flag sets, or individual components, shall be inspected by the Government for compliance in design, construction and workmanship required by this Commercial Item Description. The markings shall be inspected by the Government for compliance with the marking requirements specified herein.

6. PACKAGING

6.1 Packaging. Preservation, packing, and marking shall be as specified in the contract or order.

7. NOTES

7.1 Part identification numbering system. Items conforming with this Commercial Item Description shall be identified by a part identification number configuration consisting of identification of a portion of the Commercial Item Description number, type, and size. An example of the part identification number configuration is shown below. This part identification numbering system is intended for identification and cross-indexing of the item within the Federal cataloging system. Part identification numbers are not required to be placed on the product or container.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:26Z
Check the source to verify that this is the current version before use.

Part Identification Numbering System for A-A-2864

Example: AA2864-11 (AA2864-11) Example - Type I, Size 1 Flag Set

- --- Type (1 - I, 2 - II)
- --- Size (1 or 2)
- ----- General Commercial Item Description number

7.2 Sources of documents. The documents referenced in this Commercial Item Description shall be the issues in effect on the date of the invitation for bids or request for proposals unless otherwise specified. These documents form a part of this Commercial Item Description to the extent specified. In the event of a conflict between this Commercial Item Description and a document referenced herein, this Commercial Item Description shall take precedence.

7.2.1 Sources of Governmental documents. Copies of Federal specifications and standards are available from the General Services Administration Business Service Centers in Boston, MA; New York, NY; Philadelphia, PA; Washington, DC; Atlanta, GA; Chicago, IL; Kansas City, MO; Fort Worth, TX; Denver, CO; San Francisco, CA; Los Angeles, CA; and Seattle, WA, and the GSA Specifications Unit (3FBP-W), Suite 8100, 470 E. L'Enfant Plaza, S.W., Washington, DC 20407.

7.2.2 Sources of non-Government association documents.

AATCC 16A - Colorfastness to Light: Carbon-Arc Lamp, Continuous Light
AATCC 132 - Colorfastness to Drycleaning, are available from:

American Association for Textile Chemists and Colorists
P. O. Box 12215
Research Triangle Park, NC 27709

ASTM D 276 - Identification of Fibers in Textiles, Methods for
ASTM D 861 - Use of the Tex System to Designate Linear Density of Fibers, Yarn Intermediates, and Yarns, Practice for, are available from:

ASTM
1916 Race Street
Philadelphia, PA 19103

The Standard Color Reference of America, Tenth Edition, is available from:

The Color Association of the United States, Inc.
24 East 38th Street
New York, NY 10016

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:26Z
Check the source to verify that this is the current version before use.

7.3 Ordering Data. Purchasers should select the preferred options permitted herein, and include the following information in procurement documents:

(a) Title, number and date of the commercial item description.
(b) Type and size required (see 2.1).
(c) Whether entire set is desired or specific individual components.
(d) The preservation, packing, and marking required.

7.4 National Stock Numbers (NSNs): The following is a list of NSNs assigned which correspond to this commercial item description.

NSN	Size	Type	Name
8345-00-130-3124	1		Flag, Cord & Tassels
8345-00-130-3135	1	I	Flag Pole, 9-foot (2.7 m)
8345-00-130-3142		I	Flag Pole Stand
8345-00-130-3146		I	Flagstaff Head, Eagle
8345-00-130-3149		I	Flagstaff Head, Spearhead
8345-00-151-6486	2		Flag, Cord & Tassels
8345-00-151-6487	2		Flag (without fringe)
8345-00-682-6860	1	I	Flag Set (9-foot pole) (2.7 m)
8345-01-295-5987	2	I	Flag Set (7-foot pole) (2.1 m)
8345-01-295-9277	2	I	Flag Pole, 7-foot (2.1 m)
8345-01-316-2290	1	II	Flag Set (9-foot pole) (2.7 m)
8345-01-320-5691		II	Flag Pole Stand
8345-01-320-5692	1	II	Flag Pole, 9-foot (2.7 m)
8345-01-320-5693	2	II	Flag Pole, 7-foot (2.1 m)
8345-01-320-9267		II	Flagstaff Head, Spearhead
8345-01-320-9268		II	Flagstaff Head, Eagle

MILITARY INTERESTS:
NONE: DoD has determined that no military activity has an official interest in this commercial item description.

CIVIL AGENCY COORDINATING ACTIVITY:

VA - OSS

PREPARING ACTIVITY:

GSA - FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:26Z
Check the source to verify that this is the current version before use.

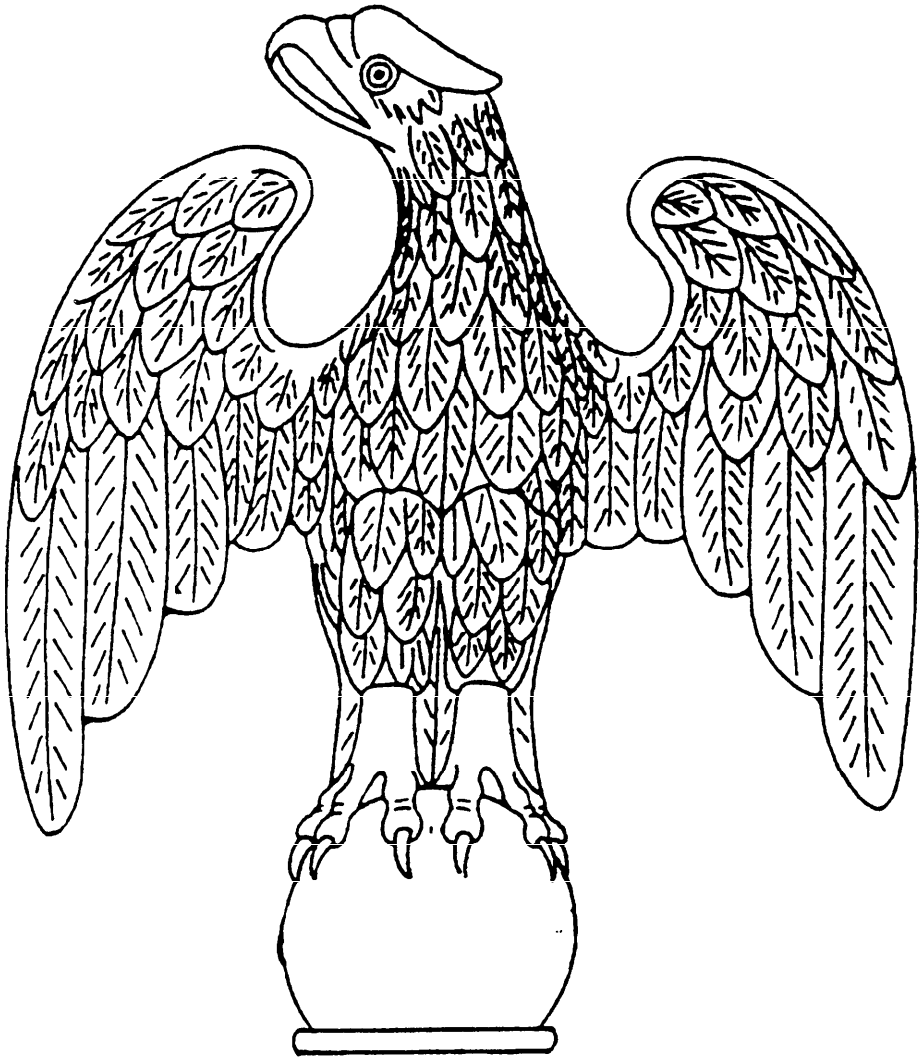


FIGURE 1. EAGLE ORNAMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:26Z
Check the source to verify that this is the current version before use.

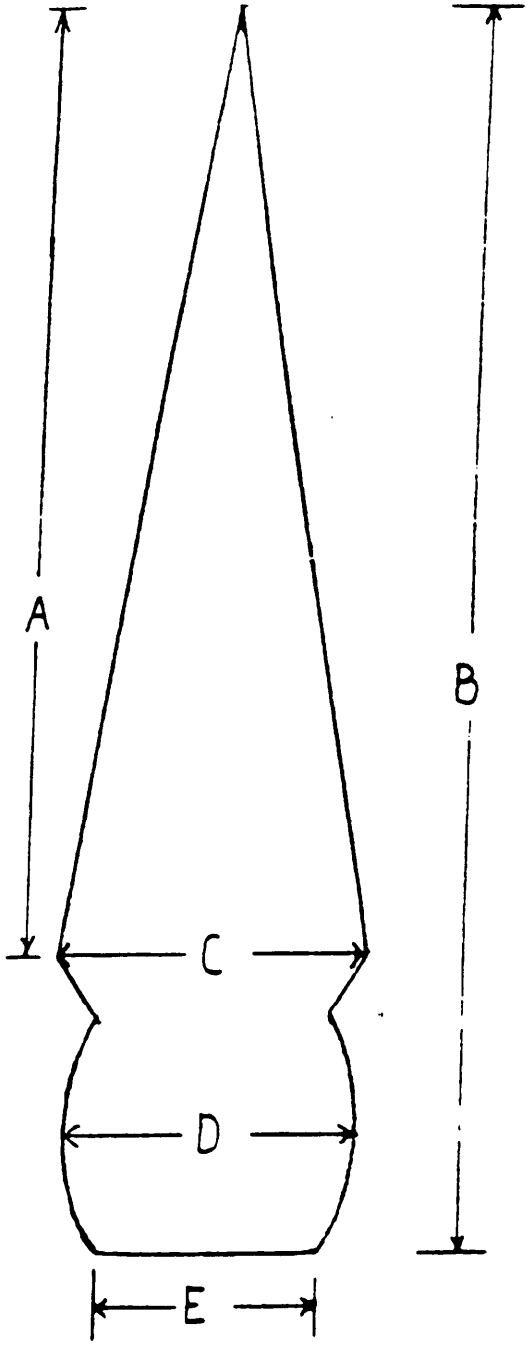


FIGURE 2. SPEAR ORNAMENT
Note: Tip may be slightly rounded

Dimensions: A - 4-3/4 inches ± 1/4 inch (12.1 cm ± 6.4 mm)
B - 6-1/4 inches ± 1/4 inch (15.9 cm ± 6.4 mm)
C - 1-21/32 inches ± 5/32 inch (4.2 cm ± 4.0 mm)
D - 1-5/8 inches ± 3/16 inch (4.1 cm ± 4.8 mm)
E - 1-1/8 inches ± 3/16 inch (2.9 cm ± 4.8 mm)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:26Z
Check the source to verify that this is the current version before use.

accordance with the "Special Sizes" of Figure 1, FED-F-416, except