NOTE: The document identifier and heading has been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.

INCH-POUND

MIL-PRF-83401/19B(USAF)
6 September 1990
SUPERSEDING
MIL-R-83401/19A(USAF)
9 October 1989

PERFORMANCE SPECIFICATION

RESISTOR NETWORK, FIXED, FILM, STYLE RZ190, 8 PIN SIP

This specification is approved for use within Electronic support Division AFLC, Department of the AIR Force, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the detail requirements for style RZ190, 8 pin single-in-line package (SIP) resistor networks. This style is available in all characteristic K and resistance tolerances G.

1.2 Part or identifying number (PIN). Resistor networks covered by this specification shall be identified by a PIN which shall consist of the basic number of this specification and a coded number. The PIN shall be in the following form:

M8340119 — Detail specification number

KA001GX — Coded number

The coded number shall be derived in accordance with MIL-R-83401.

1.2.1 Schematics. The schematic of the resistor network shall be identified by the following part number in accordance with the drawings on figure 1.

2. APPLICABLE

2.1 Government document.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).


Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Defense Electronics Supply Center, ATTN: DESC-ELDM, 1507 Wilmington Pike, Dayton, OH 45444-5765, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 5905

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:58Z
Check the source to verify that this is the current version before use.

M8340119KA001GX

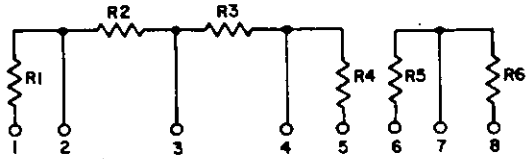


R1 = 205 kΩ
R2 = 51.1 kΩ
R3 = 51.1 kΩ
R4 = 205 kΩ
R5 = 1.0 kΩ
R6 = 100 kΩ

M8340119KA002GX

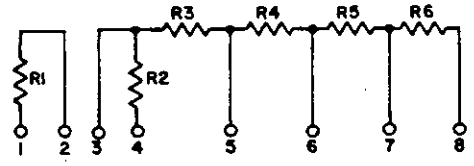


R1 = 511 kΩ
R2 = 47.5 kΩ
R3 = 47.5 kΩ
R4 = 1.2 kΩ
R5 = 511 kΩ
R6 = 511 kΩ

M8340119KA003GX

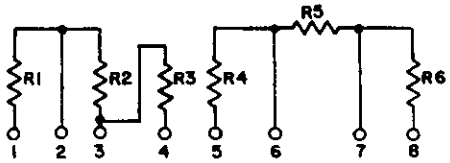


R1 = 5.11 kΩ
R2 = 681 kΩ
R3 = 10 kΩ
R4 = 10 kΩ
R5 = 5.11 kΩ
R6 = 681 kΩ

M8340119KA004GX

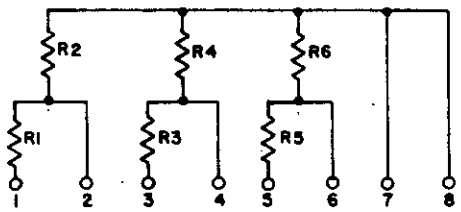


R1 = 10 kΩ
R2 = 20.5 kΩ
R3 = 10 kΩ
R4 = 20.5 kΩ
R5 = 10 kΩ
R6 = 20.5 kΩ

M8340119KA005GX

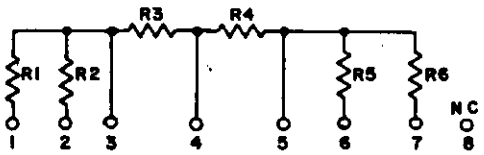

R1 = 4.87 kΩ
R2 = 4.87 kΩ
R3 = 11 kΩ
R4 = 11 kΩ
R5 = 4.87 kΩ
R6 = 4.87 kΩ

M8340119KA006GX

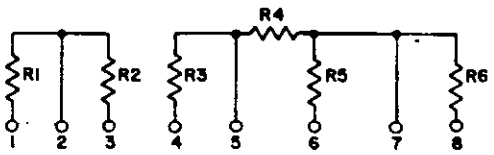


R1 = 5.11 kΩ
R2 = 5.11 kΩ
R3 = 5.11 kΩ
R4 = 4.42 kΩ
R5 = 6.81 kΩ
R6 = 5.11 kΩ

FIGURE 1. Schematics.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:58Z
Check the source to verify that this is the current version before use.

M8340119KA007GX




R1 = 10 kΩ
R2 = 75 kΩ
R3 = 10 kΩ
R4 = 75 kΩ
R5 = 10 kΩ

M8340119KA008GX




R1 = 10 kΩ
R2 = 38.3 kΩ
R3 = 10 kΩ
R4 = 38.3 kΩ
R5 = 10 kΩ

M8340119KA009GX




R1 = 2.05 kΩ
R2 = 51.1 kΩ
R3 = 47.5 kΩ
R4 = 47.5 kΩ
R5 = 47.5 kΩ

M8340119KA010GX

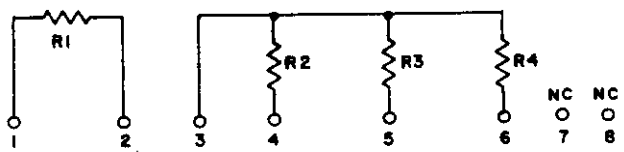


R1 = 137 kΩ
R2 = 200 kΩ
R3 = 137 kΩ
R4 = 332 kΩ

M8340119KA011GX

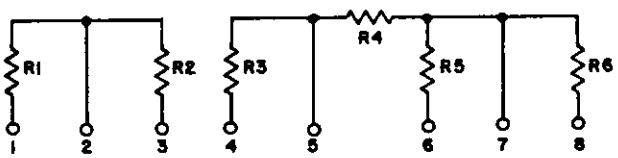

R1 = 5.11 kΩ
R2 = 5.11 kΩ
R3 = 5.11 kΩ
R4 = 2.21 kΩ
R5 = 6.81 kΩ
R6 = 5.11 kΩ

M8340119KA012GX

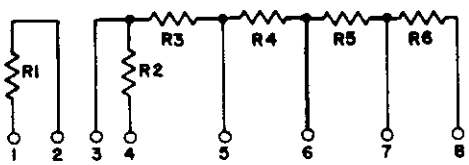

R1 = 511 kΩ
R2 = 47.5 kΩ
R3 = 47.5 kΩ
R4 = 1.2 MΩ
R5 = 511 kΩ
R6 = 511 kΩ

FIGURE 1. Schematics - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:58Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

MILITARY

MIL-R-39032 - Resistors, Packaging of

MIL-R-83401 - Resistor Networks, Fixed, Film, and Capacitor-Resistor Networks, Ceramic Capacitor and Fixed Resistors, General Specification For.

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.2 Order of precedence. In the event of a conflict betwen the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Associated detail specifications. The individual item requirements shall be in accordance with MIL-R-83401, and as specified herein.

3.2 Design and construction. The resistor shall be of the design, construction, and physical dimensions specified on figure 2.

3.3 Power rating (+70°C). The power ratings shall be as follows:

PIN	Element power rating (watts)	Network power rating (watts)
M8340119KA001GX	0.10	0.60
M8340119KA002GX	0.10	0.60
M8340119KA003GX	0.10	0.60
M8340119KA004GX	0.10	0.60
M8340119KA005GX	0.10	0.60
M8340119KA006GX	0.10	0.60
M8340119KA007GX	0.10	0.50
M8340119KA008GX	0.10	0.50
M8340119KA009GX	0.10	0.50
M8340119KA010GX	0.10	0.40
M8340119KA011GX	0.10	0.60
M8340119KA012GX	0.10	0.60

3.4 Power conditioning. The power applied for power conditioning shall be 1.5 times rated power.

3.5 Voltage rating. The maximum continuous working voltage for each resistor shall not exceed 50 volts dc or ac rms.


4. QUALITY ASSURANCE PROVISIONS


4.1 Sampling and inspection. Sampling and inspection shall be in accordance with MIL-R-83401.

5. PACKAGING


5.1 Packaging requirements. The requirements for packaging shall be in accordance with MIL-R-39032.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:58Z
Check the source to verify that this is the current version before use.

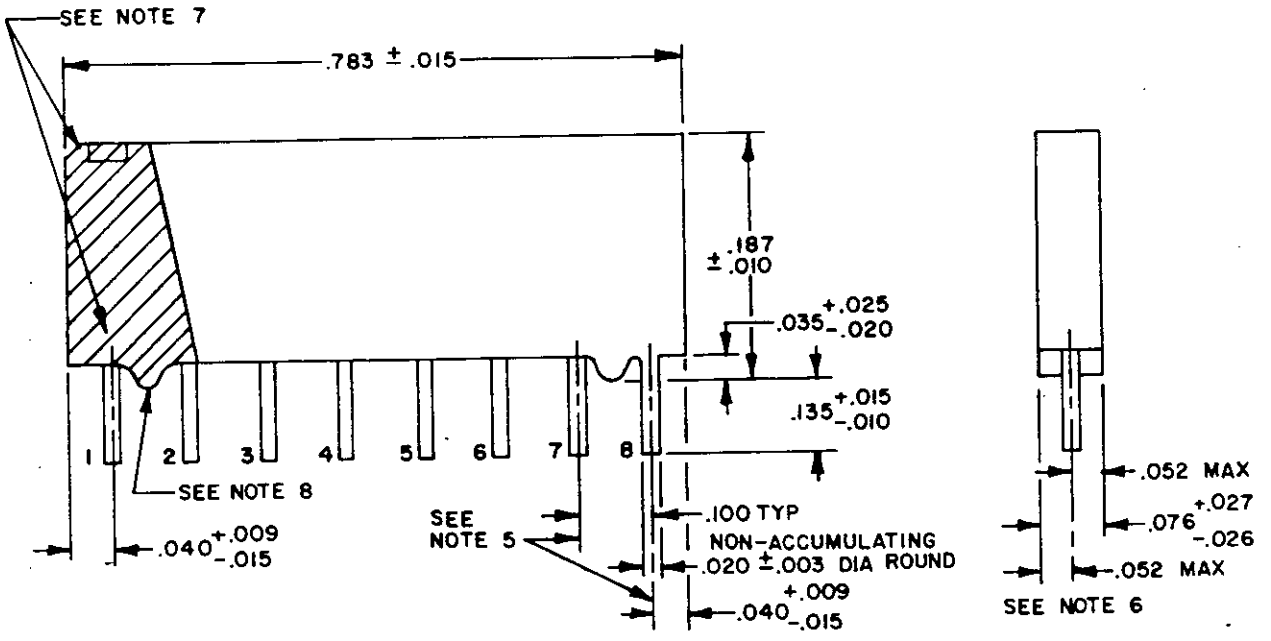

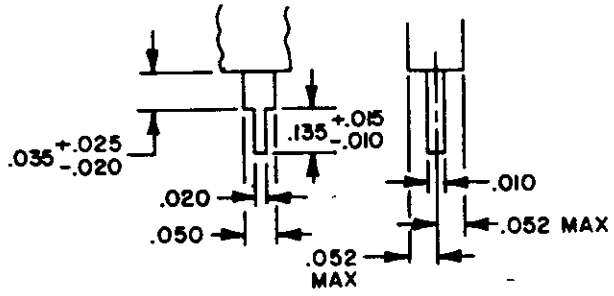

Optional lead configuration with standoff as part of lead (see note 8)

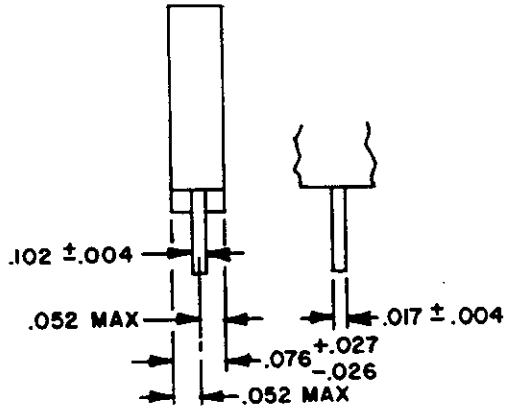

Optional lead configuration with standoff as part of body (see note 8)

FIGURE 2. Style RZ190 resistors.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:58Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm
.003	0.08	.035	0.89
.004	0.10	.040	1.02
.005	0.13	.050	1.27
.012	0.30	.052	1.32
.014	0.36	.076	1.93
.015	0.38	.089	2.26
.017	0.43	.100	2.54
.020	0.51	.135	3.43
.024	0.61	.187	4.75
.025	0.64	.783	19.89
.030	0.76		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.005 (0.13 mm).
4. The picturization of the styles above is given as representative of the envelope of the item. Slight deviations from the outline shown, which are contained within the envelope and do not alter the functional aspects of the device, are acceptable.
5. Terminal centerline to centerline measurements made at a point of emergence of the lead from the body.
6. Measurement made at the point of emergence of the lead from the body.
7. Pin 1 locator shall be a dot, notch, bevel, stripe, or numeral 1 adjacent to pin 1 in the shaded area. Also additional markings may be placed on the top edge where the bevel may be located.
8. If the standoffs are located on the body, a minimum of two standoffs are required as illustrated. As an option, additional standoffs may be located on the body of the resistor network. If leads with standoffs are used, standoffs on the body are not required.

FIGURE 2. Style RZ190 resistors - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:58Z
Check the source to verify that this is the current version before use.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Notes. The notes specified in MIL-R-83401 are applicable to this specification.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of this specification.

b. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1).

6.3 Extension of qualification. Qualification to schematic H of style RZ080 will qualify style RZ190.

6.4 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

CONCLUDING MATERIAL

Preparing activity:
Air Force - 85

Agent:
DLA-ES

(Project 5905-1211)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:58Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8 In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER MIL-R-83401/19B(USAF)	2. DOCUMENT DATE (YYMMDD)

3. DOCUMENT TITLE Resistor Network, Fixed, Film Style RZ190, 8-Pin SIP

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER		
a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY	
a. NAME AFLC, 2750th ABW/ESP Building 2 DESC Dayton, OH 45444-4500	b. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON
c. ADDRESS (Include Zip Code)	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340

Source: https://assist.dla.mil/documents/2026-10-23T07:58Z
Check the source to verify that this is the current version before use.