INCH-POUND

MIL-P-50317B(AR)
11 May 1990
SUPERSEDING
MIL-P-50317A(MU)
15 April 1971

MILITARY SPECIFICATION

**PROTECTOR, OVERVOLTAGE: 10548031**
**(+5 VOLT FILTER)**

**This specification is approved for use within the U.S. Army Armament, Munitions and Chemical Command, and is available for use by all Departments and Agencies of the Department of** Defense.

1. SCOPE

1.1 **Scope.** **This specification** covers **overvoltage** protector 10548031, hereafter **referred to as +5 volt filter, used in Computer, Range CP-888/VPS-2, part of Radar Set AN/VPS-2 and in** Test Set, Subassembly MX-8048/TPM-22 part of Radar Test Set TPM-22 **(see 6.1).**

2. APPLICABLE DOCUMENTS

2.1 **Government documents.**

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part **of this specification to the extent specified herein. Unless otherwise specified,** the issues **of** these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation .

**SPECIFICATIONS**

**MILITARY**

MIL-F-13926 - Fire Control Materiel, Manufacture and Inspection, General Specification for
MIL-I-45607 - Inspection Equipment, Acquisition, Maintenance and Disposition of **Wiring Assemblies**

**Beneficial comments [recommendations, additions, deletions) and any pertinent data which may be of use in improving this document, should be addressed to: Commander U.S. Army ARDEC, ATTN: SMCAR-BAC-S, Picatinny Arsenal, New Jersey 07806-5000** by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 1285

AMSC N/A
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

**STANDARDS**

**MILITARY**

MIL-STD-109 - Quality **Assurance Terms and Definitions**
**MIL-STD-810 - Environmental Test Methods and Engineering Guidelines**
**MIL-STD-2000 - Standard Requirements for soldering Electrical and Electronic Assemblies**

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Military Specifications and Standards, Bldg. 4D, 700 Robbins Avenue, Philadelphia, PA 19111-50940)

2.1.2 Other Government documents, drawings and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein.

**DRAWINGS (see 6.4)**

Us. ARMY ARMAMENT **RESEARCH, DEVELOPMENT AND ENGINEERING CENTER (ARDEC)**

**10548031** - Protector, Overvoltage

PACKAGING DATA SHEET

**PS10548031 - packaging of protector, Overvoltage**

(Copies of drawings, publications and other Government documents required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

2.2 'Order of precedence. In the event of conflict between the text of this specification and the references cited herein (except for associated **detail specifications, specification sheets or** MS standards), the text of this specification **shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.**



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

3. **REQUIREMENTS**

**3.1 Materials. Materials shall be in accordance with the applicable drawings and specifications.**

**3.2 Components and assemblies. The components and assemblies shall comply with all requirements specified on Drawing 10548031, all associated drawings, and with all requirements specified in applicable specifications and standards. Where applicable, the +5 volt filter shall meet the requirements of MIL-F-13926 as follows:**

**a. Dimensions and 'tolerances**
**b. Inorganic protective surface finishings**
**c. Part Identification and marking**
**d. Workmanship**

**3.3** Environmental service conditions.

3.3.1 Vibration. **The +5 volt filter shall not suffer damage and shall meet the requirements of 3.4 and 3.5** after exposure to sinusoidal vibrations, in each of three **mutually perpendicular axes, as follows:**

| Frequency Range | Amplitude |
|---|---|
| 10 to 15 hertz | 0.06 inches double amplitude |
| 15 to 25 hertz | 0.04 inches double amplitude |
| 25 to 55 hertz | 0.02 inches double amplitude |

**The** frequency of vibration shall be swept logarithmically.
**The** cycling time shall be 120 minutes per axis.
**The** sweep rate shall be 3.75 minutes ± 10% per decade.
**The** 10-55-10 hertz sweep time is 3 minutes 45 **seconds** ± 10%.

**3.3.2 Shock. The +5 volt filter shall not suffer damage and shall meet the requirements of 3.4 and 3.5 after exposure to a total of 18 impulse shocks consisting of three shock impulses of 15 ± 10% g's, 11 ± 10% milliseconds, half-sine wave applied in each direction of 3 mutually perpendicular axes.**

**3.3.3 Altitude.**

**3.3.3.1 Operating. The +5 volt filter shall meet the requirements of 3.4 and 3.5 during and after exposure to barometric pressure encountered at 10,000 feet above sea level (20.6 inches of Hg).**



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

3.3.3.2 Non-operating. The +5 volt filter shall meet the requirements of 3.4 and 3.5 after exposure for not less than **10 minutes to barometric pressure encountered at 40,000 feet above sea level (5.5 inches of Hg).**

**3.3.4** Temperature.

**3.3.4.1 0perating. The +5 volt filter shall meet the requirements of 3.4 and 3.5 when stabilized thermally at any temperature between -40 deg. F and +155 deg. F.**

3.3.4.2 Non-operating (storage). The +5 volt filter shall not suffer permanent damage when subjected to the constant temperature extremes of -60 deg. F for a period of 24 hours and +160 deg. F for a period of 4 hours (after temperature stabilization), and shall meet the requirements of 3.4 and 3.5 when returned to room ambient.

3.3.5 Humidity (non-operating). The +5 volt filter shall meet the requirements of 3.4 and 3,5 after exposure to an atmosphere with a relative humidity in excess of 95 percent for a period of 10 days.

3.4 Electrical. Each conductor shall be electrically continuous as specified on the schematic diagram of the +5 volt filter.

3.5 Performance.

3.5.1 Input and output characteristics. When supplied with the inputs specified in Table I, the +5 volt filter shall yield the DC outputs specified in Table I. AC signals superimposed on the DC input voltage shall be attenuated at the output within the limits as-shown by the shaded area of Figure 1.

**TABLE I. Input and Output Characteristics**

| REQUIREMENT | CHARACTERISTIC | TERMINALS |
|---|---|---|
| **Input** | **+6.3 ± 0.1** Vdc, ac ripple **not** greater than **1.6 V peak-to-peak** | P1-5, P1-6, & **P1-7 (+): P1-24, P1-25, & P1-26 (RET)** |
| output | +5.0 ± 0.3 Vdc across a resistive load of 1.56 OhmS | P1-30, P1-31, & P1-32 (+): P1-24, P1-25 & P1-26 (RET) |



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

**3.5.2** Overvoltage **protection**. **The** +5 volt filter shall provide output overvoltage protection for input voltages greater than +7.5 V.

3.6 First article. When specified in the contract or purchase order, a sample shall be subjected to first article inspection in accordance with the technical provisions herein (see 4.3).

**3.7 workmanship. The workmanship requirements of MIL-F-13926** shall apply, except for soldering.

3.8 Soldering. All soldering shall be in accordance with the general requirements of MIL-STD-2000 in addition to detail requirement (task)F of paragraph 1.2 of MIL-STD-2000.

## 4* QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase **order, the contractor is responsible for the performance of all inspection requirements as specified herein.** Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved ***by*** **the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements. Reference shall be made to MIL-STD-109 to define quality assurance terms used herein.**

4.1.1 Responsibility for compliance. All items must **meet all** requirements of **sections 3** and 5 **and all applicable drawings. The inspections set forth in this specification shall become a part** of the **contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does** not **authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.**

**4.1.2 General provisions. The component and subassembly inspection requirements of MIL-F-13926 form a part of the quality assurance provisions of this specification.**

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
**b. Quality conformance inspection (see 4.4).**
**c* Special sampling inspection (see 4.5).**



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

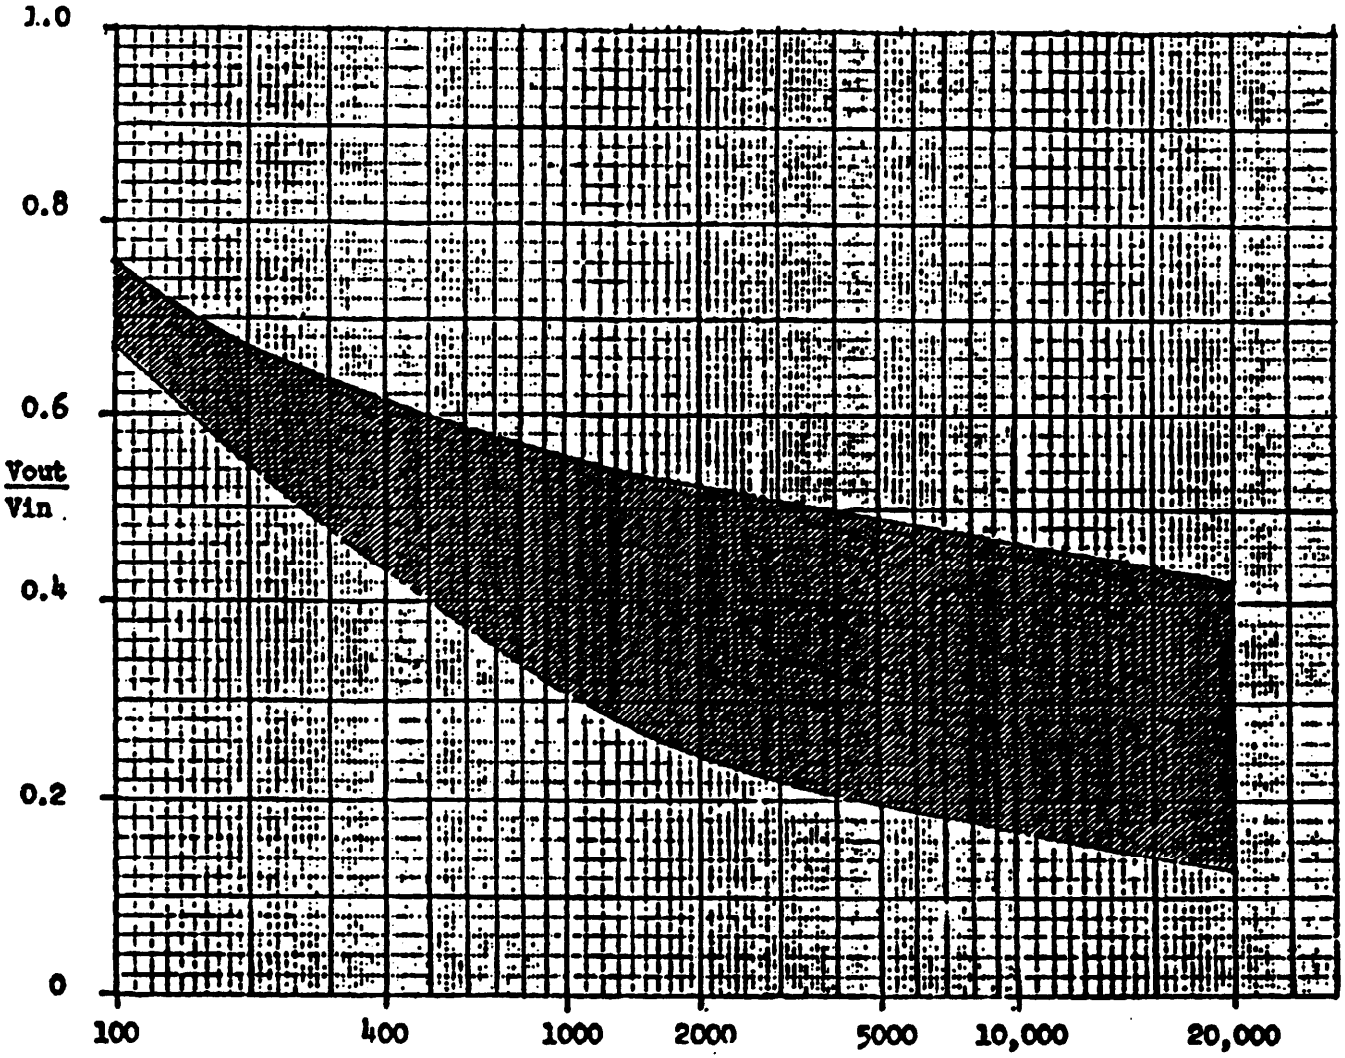



FIGURE 1. Attenuation characteristic of +5V filter.



Source: https://assist.dla.mil - Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

4.2.1 Inspection conditions. Unless otherwise specified, all examinations and tests shall be conducted at the following standard ambient conditions:

| | | |
|---|---|---|
| a. | Temperature | +50 deg to +90 deg F. |
| b. | Relative humidity | 90% RH Max. |
| c. | Pressure | 28 to 32 inches of Hg. |

4.3 First article inspection.

**4.3.1 First article submission.** The requirement for first article and the responsibility (Government or contractor) for the first article testing shall be as specified in the contract and the applicable drawing. The sample for the first article tests shall consist of three board assemblies manufactured in the same manner, using the same materials, equipment, processes and procedure as in regular production. All parts and materials, including packaging and packing shall be obtained from the same source of supply as used in regular production.

**4.3.1.1 Government testing.** When the **Government is responsible for conducting first article tests, the contractor, prior to submitting the sample to the Government, shall inspect the sample to ensure that it conforms to all the requirements of the contract and the applicable drawings. The contractor shall submit a record of this inspection with the sample including certified test report (CTR) or certificate of conformance (COC) for the materials.**

**4.3.3.2 Contractor testing. When the Contractor is responsible for conducting first article tests, the sample shall be inspected by the contractor for all the requirements of the contract, all** of the examinations and tests specified in Table II (Functional Test) and Table III (Special Sampling) herein and to all requirements of the applicable drawings. The sample and a record of this inspection, including CTR/COC, shall be submitted for the Government approval. The Government reserves the right to witness the Contractor's inspection.

**4.3.2 Rejection. If any assembly, component or test specimen fails to comply** with **any of the applicable** requirements, **the** first **article sample shall be rejected. The Government reserves the right to terminate its inspection upon any failure of any +5 volt filter to comply with any of the stated requirements.**

4.4 Quality conformance inspection.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

**4.4.1 Inspection lot formation.** The term "inspection lot" is defined as a homogeneous collection of units of product from which a representative sample is drawn or which is inspected 100 percent to determine conformance with applicable requirements. Units of product selected for inspection shall represent only the inspection lot from which they are drawn and shall not be construed to represent any prior or subsequent quantities presented for inspection. Homogeneity shall be considered to exist provided the inspection lot has been produced by one manufacturer, in one unchanged process, using the same materials and methods, in accordance with the same drawings, same drawing revisions, same specifications and same specification revisions, and complies with the provisions for submission of product. All material submitted for inspection in accordance with this specification shall comply with the homogeneity criteria specified herein, regardless of the type of inspection procedure which is being applied to determine conformance with requirements.

4.4.2 Examinations and tests.

**4.4.2.1** Components, assemblies and subassemblies. All components, **assemblies** and subassemblies shall be inspected in accordance with the inspection provisions contained in this specification and the Quality Assurance Provisions (QAP) listed in the Technical Data Package (TDP). In the absence of QAPs, the applicable quality assurance provisions of MIL-F-13926 shall apply.

4.4.2.2 Final acceptance Inspection. Subsequent to first **article approval, examination and tests related to Section 3 herein shall be performed on a single defect (individual characteristic) basis in accordance with the sampling plans specified in 4.4.2.3 herein. Examination and test for packaging and marking shall be in accordance with Section 5 herein. The tabulated classification of defects in 4.4.2.3 shall constitute the minimum inspection to be performed by the supplier after first article approval and prior to Government acceptance or rejection by item or lot.**

**4.4.2.3 Functional tests. The tests in Table II shall be performed on a 100% basis.**



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

TABLE 11. Functional tests
(100% Inspection)

| CHARACTERISTIC | | REQUIREMENT | TEST PROCEDURE |
|---|---|---|---|
| Critical: | | None | N/A |
| Major: | | | |
| 101. | Electrical | 3.4 | 4.7.2 |
| 102. | Performance | 3.5 | 4.7.3 |
| Minor: | | None | N/A |

4.5 Special sampling. One +5 volt filter out of the first 50 Produced and one out of each 100 Produced thereafter shall be selected at random. The sample shall have met the requirements and tests of Table II and shall then meet the tests in Table III. Unless otherwise specified in the contract the items shall be returned to the lot upon successful completion of testing.

TABLE III . Special Sampling

| CHARACTERISTIC | | REQUIREMENTS | TEST PROCEDURE |
|---|---|---|---|
| Critical: | | None | N/A |
| Major: | | | |
| 103. | Vibration | 3.3.1 | 4.7.1.1 |
| 104. | Shock | 3.3.2 | 4.7.1.2 |
| 105. | Altitude | 3.3.3 | 4.7.1.3 |
| 106. | Temperature | 3.3.4 | 4.7.1.4 |
| 107. | Humidity | 3.3.5 | 4.7.1.5 |
| Minor: | | None | N/A |

4.5.1 Failure of sample. Should any one item of a special sampling fail to meet any of the specified test requirements, acceptance of the product shall be suspended by the Government until necessary corrections to all production since the last test as well as to current production has been accomplished in accordance with the provisions of the contract.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

**4.6** Inspection equipment.

**4.6.1 Government-furnished inspection equipment. Where the contract provides for Government-furnished test equipment, supply and maintenance of test equipment shall be in accordance with the applicable requirements of MIL-I-45607.**

4.6.2 Contractor-furnished inspection equipment.

**4.6.2.1 Government design. Unless otherwise specified in the contract, all inspection equipment identified by drawing number in specifications or QAPS forming a part of the contract shall be supplied by the contractor in accordance with the design specified. The contractor may, however, propose alternatives to Government designs for approval in accordance with 6.3.**

**4.6.2.2** Contractor design. The contractor shall design and supply inspection equipment compatible with the "Methods of Inspection" specified in 4.7 of this specification and with the component inspection procedures specified in "Examination" and "Test Facilities" requirements of MIL-F-13926 whenever Government designs are not specified (see 4.6.2.1), Since tolerance of test equipment is normally considered to be within 10 percent of the product tolerance for which it is intended, this inherent error in the test equipment design must be considered as part of the prescribed product tolerance limit. Thus , concept, construction, materials, dimensions, and tolerances used in the design of test equipment shall be so selected and controlled as to ensure that the test equipment will reliably indicate acceptability of a product which does not exceed 90 percent of the prescribed tolerance limit and permit positive rejection when nonconforming. Construction shall be such as to facilitate routine calibration of test equipment. Contractor inspection equipment designs shall be submitted for approval in accordance with 6.3.

**4.6.2.3 Test e**quipment. In conjunction with 4.6.2.1 and 4.6.2.2, the test equipment listed in Table IV shall be used in the performance of the applicable test methods and procedures as **specified in 4.7.**




Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

**TABLE IV. Test equipment list**

| ITEM NUMBER | DESCRIPTION |
|---|---|
| 1. Power supply | **0-10 Vdc, 0.01% line and load regulation, O-5A current capacity, adjustable current limiting. Ripple voltage not greater than 1** mV rms. |
| 2. Audio Oscillator | Internal impedance approximately **600** ohms; **frequency 20 to 20,000 Hz; amplitude 3 V AC peak-to-peak; approximately sinusoidal.** |
| 3. AC/DC Digital **Voltmeter** | **Visual display 4 digits, minimum full scale range 10.00 volts or greater. Low range shall be** no greater **than** 100.0 mV full scale. Input resistance 1 megohm or **qreater. Accuracy ±0.1%** of reading and ± 0.1% **of** full scale reading. |
| 4. Oscilloscope | Dual channel. Vertical passband **DC** to **200** kHz or more. |
| **5.** Test Harness | See Figure 2. See Table V for test harness parts **list.** |



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

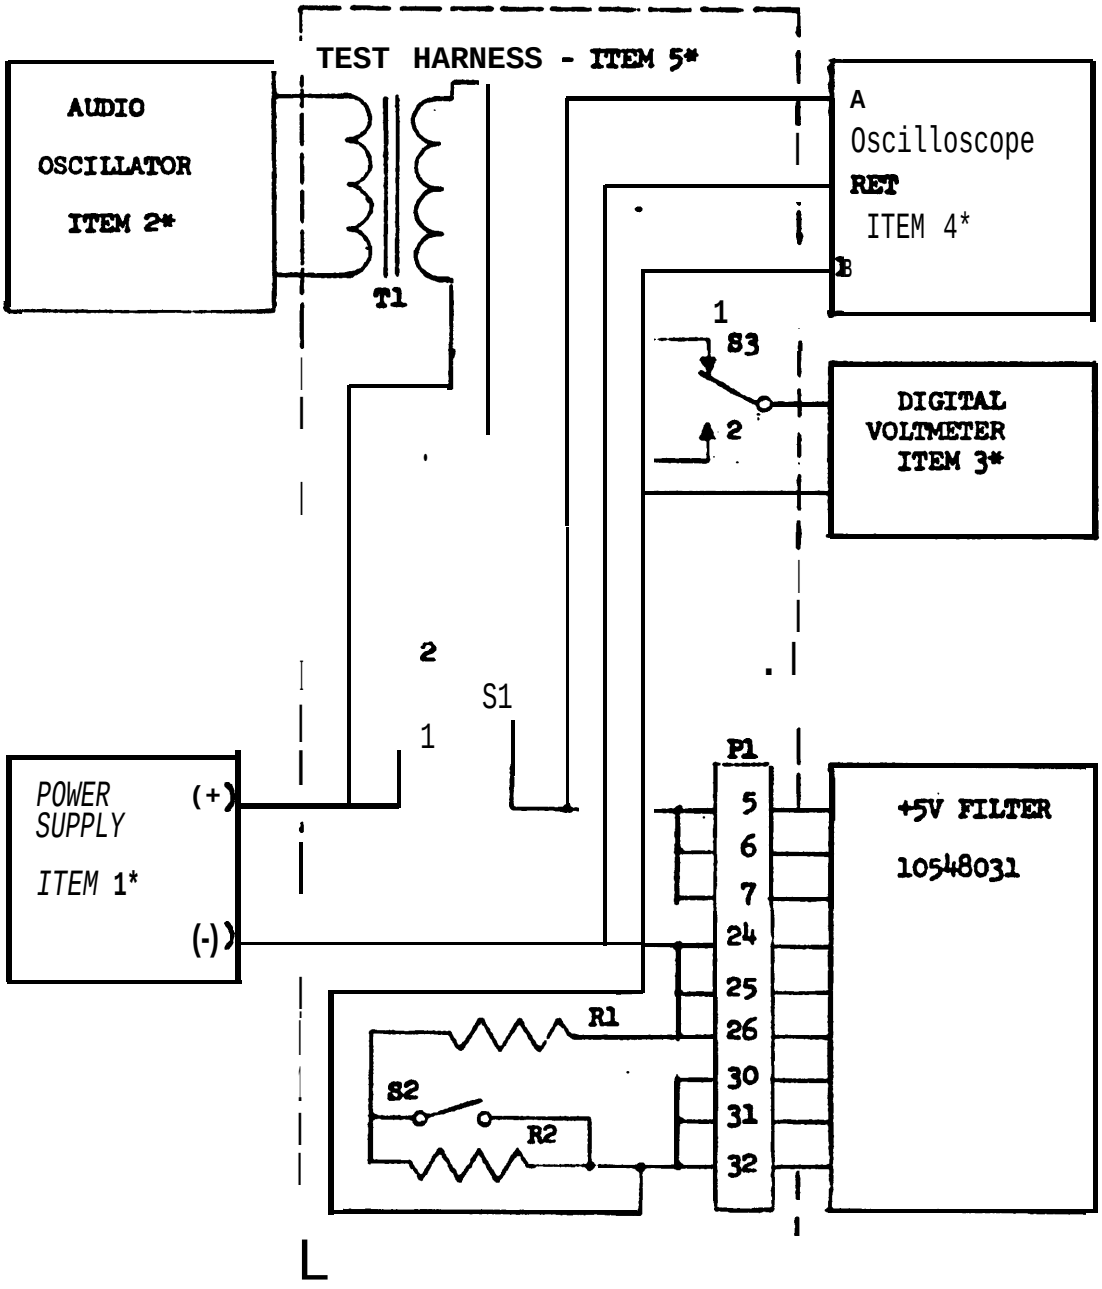


● Refer to 4.6.2.3

**FIGURE** *2.* *+5 V filter test setup.*



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

TABLE V. Test harness parts list

| DESIGNATION | PART | DESCRIPTION |
|---|---|---|
| P1 | Connector | Malco 5893232-1, Elco 07-5422-0198-01, or equivalent |
| R1 | Resistor | 1.56 Ohms ± l%, 25 W |
| S1 | Switch | SPDT, 5 A capacity |
| S2 | Switch | SPST, 5 A capacity |
| S3 | Switch | SPDT, 0.5 A capacity |
| T1 | Transformer | Isolation and matching transformer; frequency approximately 500 to 700 Hz; impedance ratio approximately 6000 to 1; DC capability on secondary greater than 60 mA. |

4.7 Methods of inspection.

4.7.1 Environmental. Environmental tests shall be conducted in accordance with the test conditions, general test performance guidance, and individual test methods of MIL-STD-810 except as specified herein. Test facilities, chambers and apparatus used in conducting the tests contained in this specification shall be capable of meeting the conditions required.

4.7.1.1 Vibration. The test shall be performed as specified in Method 514.3, Category 8, Procedure I, of MIL-STD-810 as modified by 3.3.1 herein. In Step 1 of Procedure I only steps 4 through 8 of paragraph 11-2.1 apply. The +5 volt filter shall be attached to the vibration generator directly or with a fixture, and securely held by its normal means of attachment. After vibration, the +5 volt filter shall be tested as specified in 4.7.2 and 4.7.3 herein to determine compliance with 3.3.1.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

4.7.1.2 Shock. This test shall be performed as specified in Procedure I, Section II of Method 516.3 of MIL-STD-810 except that:

a. **The post test functional check (Step 5 of procedure I) need not be conducted until completion of all shock impulses.**

b. The shock pulses shall be 15 g's ± 10% amplitude and 11 ms ± 10% duration.

c. The maximum g shall occur at 5.5 milliseconds ± 10%.

d. The shock measuring **system shall have a flat frequency response within ± 10% from 20 to 2,000 hertz.**

**After the application of all the shock impulses, the +5 volt filter shall be tested as** specified in 4.7.2 and 4.7.3 to determine compliance with 3.3.2.

4.7.1.3 Altitude (operating and non-operating). This test shall be performed as specified in Procedures II and III, Method 500.2 of MIL-STD-810. The operational checkout shall be as specified in 4.7.3 for compliance with 3.3.3.

4.7.1.4 **Temperature.**

**4.7.1.4.1 High (operating and non-operating) This test shall be performed as specified In Procedures I and II,"Method 501.2 of MIL~STD-810 with constant temperature** extremes **as specified in 3.3.4. The operational checkout shall be as specified in 4.7.2 and 4.7.3 for compliance with 3.3.4.**

4.7.1.4.2 Low **(operating and non-operating).** This test shall be **performed as specified** in Procedures I and II, Method 502.2 of MIL-STD-810 with constant temperature extremes as specified in 3.3.4. The operational checkout shall be as specified in 4.7.2 and 4.7.3 for compliance with 3.3.4.

4.7.1.5 Humidity (non-operating). This test **shall be performed in accordance with Procedure III, Method 507.2 of** MIL-STD-810 except that in Step 7, checkout shall be performed at the conclusion of the test only, with the item at standard ambient conditions. The operational checkout shall be as specified in 4.7.3 for compliance with 3.3.5.

4.7.2 Electrical. Continuity shall be inspected by **standard measuring equipment (SME) and visual examination for compliance with 3.4.**

4.7.3 Performance. The selected +5 volt filter shall be tested as follows:



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

**4.7.3.1** Input and output characteristics. Place test harness switches shown in Figure 2, as follows:

| Switch | Position |
|---|---|
| S1 | 1 |
| **S2** | **Closed** |
| S3 | 1 |

Adjust power supply (Table IV, item 1) to deliver a 6.3 ± 0.1 Vdc with current limiting to begin at 4 A and connect to test harness (Table IV, item 5) as shown in Figure 2. Connect oscilloscope and voltmeter (Table IV, items 3 and 4) as shown in Figure 2. Insert +5 volt filter in connector P1 of the test harness. Place **voltmeter (Table IV, item 3) on dc and readjust power supply, record reading, turn test harness switch** S3 **to** position 2 and **observe output voltage on voltmeter and verify compliance with Table I. Connect the oscillator to the test harness as shown in Figure 2. Place voltmeter on ac. Perform the following steps:**

a. **Turn test harness switch S1 to position 2.**
b. **Turn test harness switch S3 to position 1.**
c* **Adjust the audio oscillator frequency to 100 Hz.**
d. **Adjust the audio oscillator output to 20 mV on** the **voltmeter.**
e. **Turn** switch S3 to position 2.
f. Read the indication on the voltmeter and verify that **v out/v in falls within the shaded area of Figure 1.**
**g. Use oscilloscope (Table IV, item 4) to verify that the** output waveform, on channel B, is a replica at a lower ac level, of the input waveform on channel A.

Repeat steps a through f for frequencies of 400, 1000, 2000, 5000, 10,000 and 20,000 Hz.

4.7.3.2 Overvoltage protection. Turn test harness switches S1 and S3 to position 1. open switch s2. Place voltmeter on dc. **Slowly increase** output voltage **of power supply (Table IV, item 1). When voltmeter reads the value shown in 3.5.2, the output voltage of the filter shall suddenly drop when the overvoltage protection circuit in the filter fires.**

**4.8 Soldering. Soldering processes shall be inspected by certified inspectors to the requirements and acceptance criteria of** MIL-STD-2000 as specified in paragraph 3.8.

## 5. PACKAGING

5.1 **General. Preservation, packing, and marking shall be in accordance with Packaging Data Sheets PS10548031. The level of** protection shall be as specified in the procurement document.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

**6.1 Intended use.** The +5 volt filter is used in Test Set, subassembly MX-8048/TPM-22, part of Radar Test Set AN/TPM-22 and in Computer, Range CP-888/VPS-2, part of Radar Set AN/VPS-2. In the test set, the +5 volt filter simulates the performance of the subassembly as used in the Radar Set AN/VPS-2. In the Radar Set AN/VPS-2, the +5 volt filter attenuates transients and noise in the power supplied to the logic circuits.

6.2 Acquisition requirements. Procurement documents shall specify the following:

a. Title, number and date of this specification.
b. Applicable stock number.
c. First Article Sample requirements.
d. Packaging requirements, if other than specified in Section 5.
e. Serialization requirements, if applicable.
f. Certificate of Conformance for each lot or shipment of product.

6.3 Submission of contractor inspection equipment designs for approval. Submit two copies of designs as required to: Commander, U.S. Army AMCCOM, ATTN: AMSMC-QAF-I, Picatinny Arsenal, NJ 07806-5000. This address will be specified on the Contract Data Requirements List, DD Form 1423 in the contract. Unless otherwise specified, data item DI-R-1714 will apply.

6.4 Drawings. Drawings listed in Section 2 of this specification under the heading U.S. Army Armament Research, Development and Engineering Center (ARDEC), may also include drawings prepared by, and identified as, U.S. Army Armament, Research and Development Command (ARRADCOM), Frankford Arsenal, Rock Island Arsenal or Picatinny Arsenal drawings. Technical data originally prepared by these activities is now under cognizance of ARDEC .

**6.5 Subject Term (Key word) listing.**

**Computer, Range CP-888/VPS-2**
**Filter, +5V**
**Fire** Control System
**Overvoltage protector**
**Radar Set AN/VPS-2**
**Radar Test Set TPM-22**
**Test Set, Subassembly MX-8048/TPM-22**
**Vulcan Air Defence System (Vads)**



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

**6.6 Changes from previous issue.** Asterisks (or **vertical lines) are not** used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

**Custodian:**
**Army-AR**

**Preparing activity:**
**Army-AR**

**(Project 1285-A700)**



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

# STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

## INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

| I RECOMMEND A CHANGE: | 1. DOCUMENT NUMBER<br>MIL-P-50317B (AR) | 2. DOCUMENT DATE (YYMMDD)<br>11 May 1990 |
|---|---|---|

**3. DOCUMENT TITLE**
PROTECTOR, OVERVOLTAGE: 10548031 (+5 VOLT FILTER)

**4. NATURE OF CHANGE** *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

**5. REASON FOR RECOMMENDATION**

**6. SUBMITTER**

| a. NAME (Last, First, Middle Initial) | b. ORGANIZATION |
|---|---|
| c. ADDRESS (Include Zip Code) | d. TELEPHONE (Include Area Code)<br>(1) Commercial<br>(2) AUTOVON (If Applicable) |
| | 7. DATE SUBMITTED (YYMMDD) |

**8. PREPARING ACTIVITY**

| a. NAME<br>US Army ARDEC<br>Standardization & Specification Office | b. TELEPHONE (Include Area Code)<br>(1) Commercial: (201) 724-6674<br>(2) AUTOVON: 880-6674 |
|---|---|
| c. ADDRESS (Include Zip Code)<br>ATTN: SMCAR-BAC-S/Bldg 6<br>Picatinny Arsenal, NJ 07806-5000 | IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT:<br>Defense Quality and Standardization Office<br>5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466<br>Telephone (703) 756-2340 AUTOVON 289-2340 |



Source: https://assist.dla.mil - Downloaded: 2026-02-20T20:21Z
Check the source to verify that this is the current version before use.