MILITARY SPECIFICATION

SURVIVAL KIT CONTAINER, AIRCRAFT SEAT, WITH OXYGEN-RSSK-6

This specification has been approved by the Bureau of Naval Weapons, Department of the Navy.

1. SCOPE

1.1 Scope - This detail specification together with the general specification cover requirements for the procurement of a RSSK-6 rigid seat survival kit.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of the specification to the extent specified herein.

SPECIFICATIONS

Military

MIL-S-81018	Survival Kit Container, Aircraft Seat, with Oxygen, General Specification for

DRAWINGS

Bureau of Naval Weapons

63A88C5	Hose and Cable Assembly - Pressure Suit, Seat Kit to Pilot
63A89C12	Hose Assembly - Oxygen, Seat Kit to Aircraft

(When requesting any of the applicable documents, refer to both title and number. All requests should be made via the cognizant Government quality control representative. Copies of this

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:55Z
Check the source to verify that this is the current version before use.

specification and other unclassified specifications and drawings required by contractors in connection with specific procurement functions should be obtained upon application to the Commanding Officer, Naval Supply Depot (Code DCI), 5801 Tabor Avenue, Philadelphia, Pennsylvania 19120. All other documents should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Qualification - The RSSK-6 rigid seat survival kit furnished under this specification shall be a product which has been inspected, and passed the qualification inspections specified in the general specification unless otherwise specified herein, and has been listed on or approved for listing on the applicable qualified products list.

3.2 Requirements - All requirements shall be in accordance with the general specification MIL-S-81018 except as otherwise specified herein.

3.3 Design and construction - The design and construction of the RSSK-6 rigid seat survival kit shall conform to that specified in the general specification except as otherwise specified herein.

3.3.1 Operation - The operation of the RSSK-6 rigid seat survival kit shall be as specified in the general specification.

3.3.2 Components - The RSSK-6 rigid seat survival kit shall consist of the components specified in the general specification which are the following:

a. Basic container.
b. Contoured comfort cushion.
c. Ejection seat to kit attaching hardware.
d. Kit to integrated torso harness attaching hardware.
e. Operating handle and lid unlock assembly.
f. Survival equipment and container retaining lanyard assembly.
g. Emergency bailout oxygen system.
h. Survival equipment bag.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:55Z
Check the source to verify that this is the current version before use.

3.3.2.1 Basic container - The basic container of the RSSK-6 rigid seat survival kit shall be designed to conform to the requirements specified in the general specification and to the detail requirements specified herein, and as shown in figure 1.

3.3.2.1.1 Container bottom - The container bottom of the RSSK-6 rigid seat survival kit shall conform to the requirements specified in the general specification and to the envelope dimensions and general design of figure 5.

3.3.2.1.2 Contoured container lid - The contoured container lid of the RSSK-6 rigid seat survival kit shall conform to the requirements specified in the general specification and to the envelope dimensions and general design of figure 3.

3.3.2.1.3 Lid mechanism - The lid mechanism of the RSSK-6 rigid seat survival kit shall conform to the requirements of the general specification.

3.3.2.2 Contoured comfort cushion - The contoured comfort cushion of the RSSK-6 rigid seat survival kit shall conform to the requirements specified in the general specification and to the envelope dimensions and general design of figure 2.

3.3.2.3 Ejection seat to kit attaching hardware - The ejection seat to kit attaching hardware of the RSSK-6 rigid seat survival kit shall conform to the requirements specified in the general specification and shall conform to the general design of figure 1.

3.3.2.4 Kit to integrated torso harness attaching hardware - The kit to integrated torso harness attaching hardware at the RSSK-6 rigid seat survival kit shall conform to the requirements specified in the general specification and shall conform to the general design of figure 1.

3.3.2.5 Operating handle and lid unlock assembly - The operating handle and lid unlock assembly of the RSSK-6 rigid seat survival kit shall conform to the requirements specified in the general specification and shall conform to the general design of figure 1.

3.3.2.6 Survival equipment and container retaining lanyard - The survival equipment and container retaining lanyard of the RSSK-6 rigid seat survival kit shall conform to the requirements specified in the general specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:55Z
Check the source to verify that this is the current version before use.

3.3.2.7 Emergency bailout oxygen system - The emergency bailout oxygen system of the RSSK-6 rigid seat survival kit shall conform to the requirements specified in the general specification except as otherwise specified herein. and as shown in figure 6.

3.3.2.7.1 Components - The components of the emergency bailout oxygen system of the RSSK-6 seat kit are the same as those specified in the general specification with the exception of the oxygen hoses and the electrical communications system.

3.3.2.7.1.1 Oxygen hoses with quick disconnect - The RSSK-6 rigid seat survival kit shall include the two following hoses located as shown in figures 1 and 6.

BuWeps Drawing No.	Title
63A88C5-1	Hose and Cable Assembly - Pressure Suit, Seat Kit to Pilot
63A89C12-1	Hose Assembly - Oxygen, Seat Kit to Aircraft

3.3.2.7.1.2 Electrical communications system - The electrical communications system of the RSSK-6 rigid seat kit shall be made up of the components shown and listed in figure 6.

3.3.2.8 Survival equipment bag - The survival equipment bag of the RSSK-6 rigid seat survival kit shall conform to the requirements specified in the general specification.

3.3.3 Design load requirements - The design load requirements of the RSSK-6 rigid seat survival kit shall be as specified in the general specification.

3.4 Performance - The RSSK-6 rigid seat survival kit shall meet all the performance requirements of the general specification when tested as specified therein.

3.5 Size - The RSSK-6 rigid seat survival kit shall conform to the envelope dimensions of figures 3, 4,&5 and shall conform to the contour of the ejection seat bucket with a 1/4 inch clearance between the seat kit and the seat bucket around the periphery of the seat kit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:55Z
Check the source to verify that this is the current version before use.

3.6 Weight - The weight of the RSSK-6 rigid seat kit including the emergency bailout oxygen system but not including the survival equipment shall be a maximum of 25 ± 1/2 pounds. The approximate weight of the seat kit including the survival equipment shall be 45 pounds.

3.6.1 Center of gravity - The center of gravity of the RSSK-6 rigid seat survival kit including the emergency bailout oxygen system and the survival equipment package shall be specified by the Aerospace Crew Equipment Laboratory.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection - Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of inspection - The examination and testing of the RSSK-6 rigid seat survival kit shall be in accordance with the examinations and tests specified in the general specification and shall be classified as follows:

(a) Qualification inspection - Qualification inspection consists of the examinations and tests performed on samples submitted for approval as qualified products.

(b) First article inspection - First article inspection consists of examinations and tests performed on the RSSK-6 rigid seat survival kit which are representative of the production item after award of a contract to determine that the production item meets the requirements of the general specification and those specified herein.

(c) Quality conformance inspection - Quality conformance inspection consists of examinations and tests performed on individual products or

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:55Z
Check the source to verify that this is the current version before use.

lots to determine conformance of the products or lots with the requirments set forth in the general specification and those specified herein.

4.3 Qualification inspection - The qualification inspection of the RSSK-6 rigid seat survival kits shall consist of examinations and tests for all of the requirements of the general specification and as otherwise specified herein.

4.3.1 Qualification samples - The qualification samples shall be as specified in the general specification.

4.4 First article inspection - The first article inspection of the RSSK-6 rigid seat survival kits shall consist of examinations and tests for all of the requirements of the general specification and as otherwise specified herein.

4.4.1 First article samples - Unless otherwise specified, the first article samples shall be as specified in the general specification.

4.5 Quality conformance inspection - The quality conformance inspection for the RSSK-6 rigid seat survival kit shall consist of the same examinations and tests as specified in the general specification.

4.5.1 Sampling - The sampling of the RSSK-6 rigid seat survival kit shall be as specified in the general specification.

4.6 Test conditions - The requirements for test conditions shall be as specified in the general specification.

4.7 Inspection methods - The inspection methods for the RSSK-6 shall be as specified in the general specification and the performance requirements shall be met.

5. PREPARATION FOR DELIVERY

5.1 Preparation for delivery shall be in accordance with the requirements as specified in the general specification.

6. NOTES

6.1 All notes specified in the general specification are applicable to this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:55Z
Check the source to verify that this is the current version before use.

CONTOUR OF THE SEAT IS TO BE SUCH THAT IT WILL FIT SECURELY INTO INSIDE OF THE MARTIN BAKER F5 SEAT WITHOUT CAUSING INTERFERENCE OR DISCOMFORT TO THE PILOT. A CLEARANCE OF 1/4 INCH SHALL EXIST BETWEEN THE RIGID SEAT KIT AND THE EJECTION SEAT. THE DIMENSIONS ON THE FOLLOWING FIGURES ARE ENVELOPE DIMENSIONS


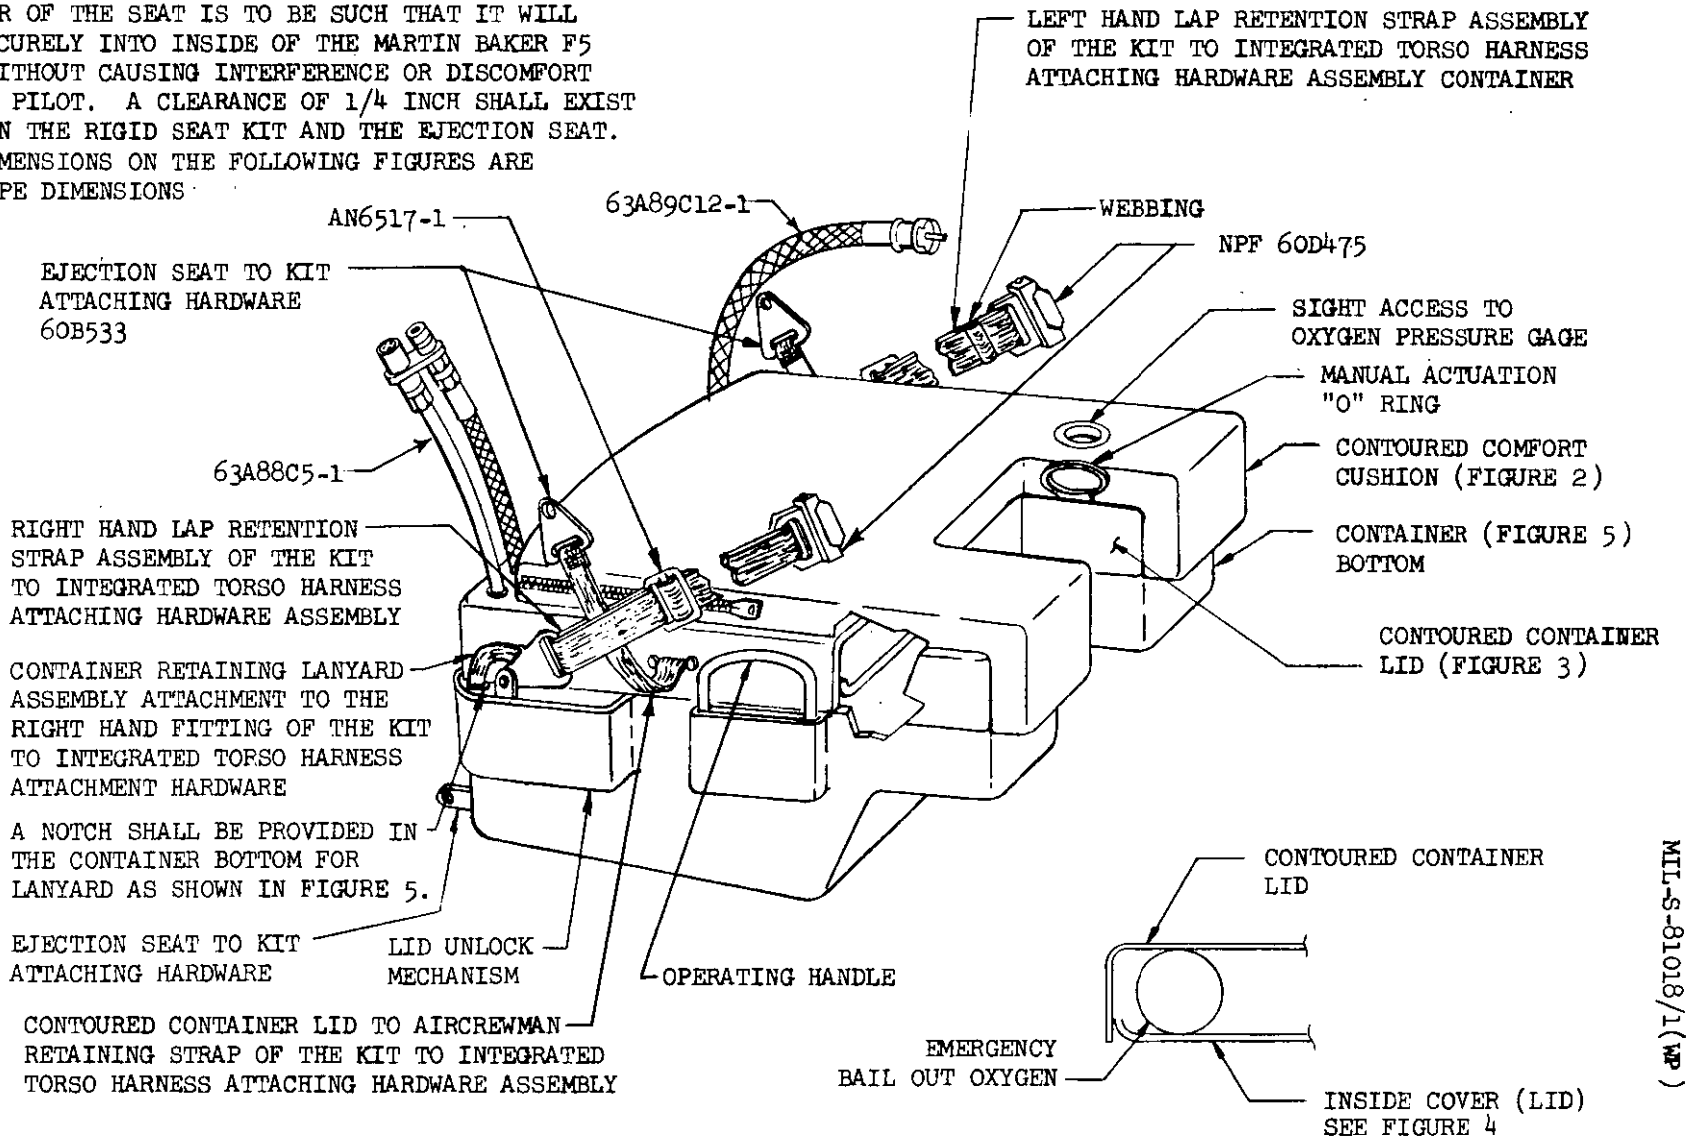


FIGURE 1. RIGID SEAT SURVIVAL KIT ASSEMBLY WITH OXYGEN - RSSK-6

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:55Z
Check the source daily for updates to current version before use.

RIGID SEAT SURVIVAL KIT-RSSK-6

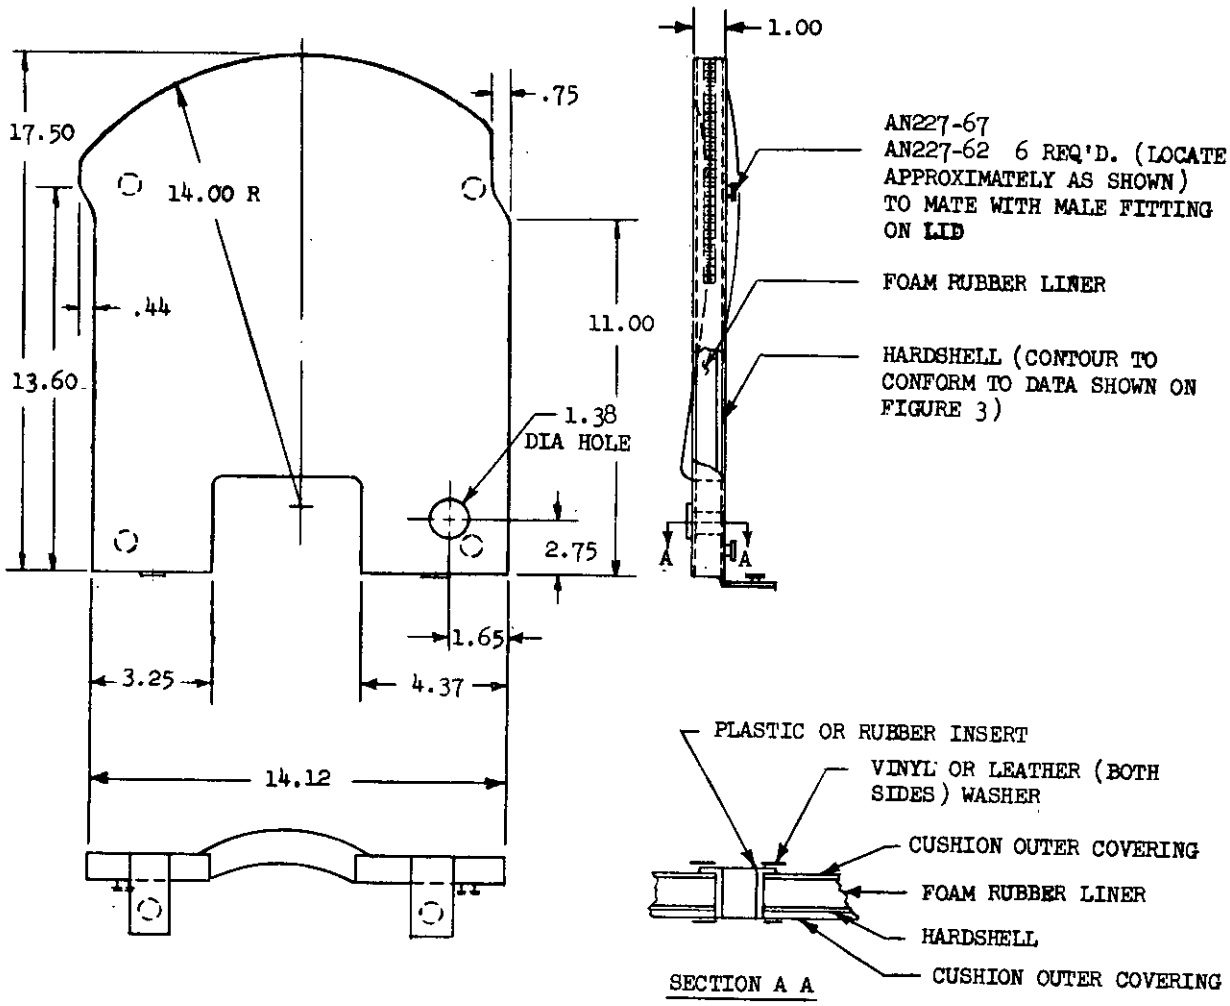


CONTOURED HARD SHELL SHALL MATCH AND INTEGRATE WITH THE CONTOUR OF THE CONTOURED CONTAINER LID

FIGURE 2. CONTOURED COMFORT CUSHION

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:55Z
Check the source to verify that this is the current version before use.

RIGID SEAT SURVIVAL KIT-RSSK-6

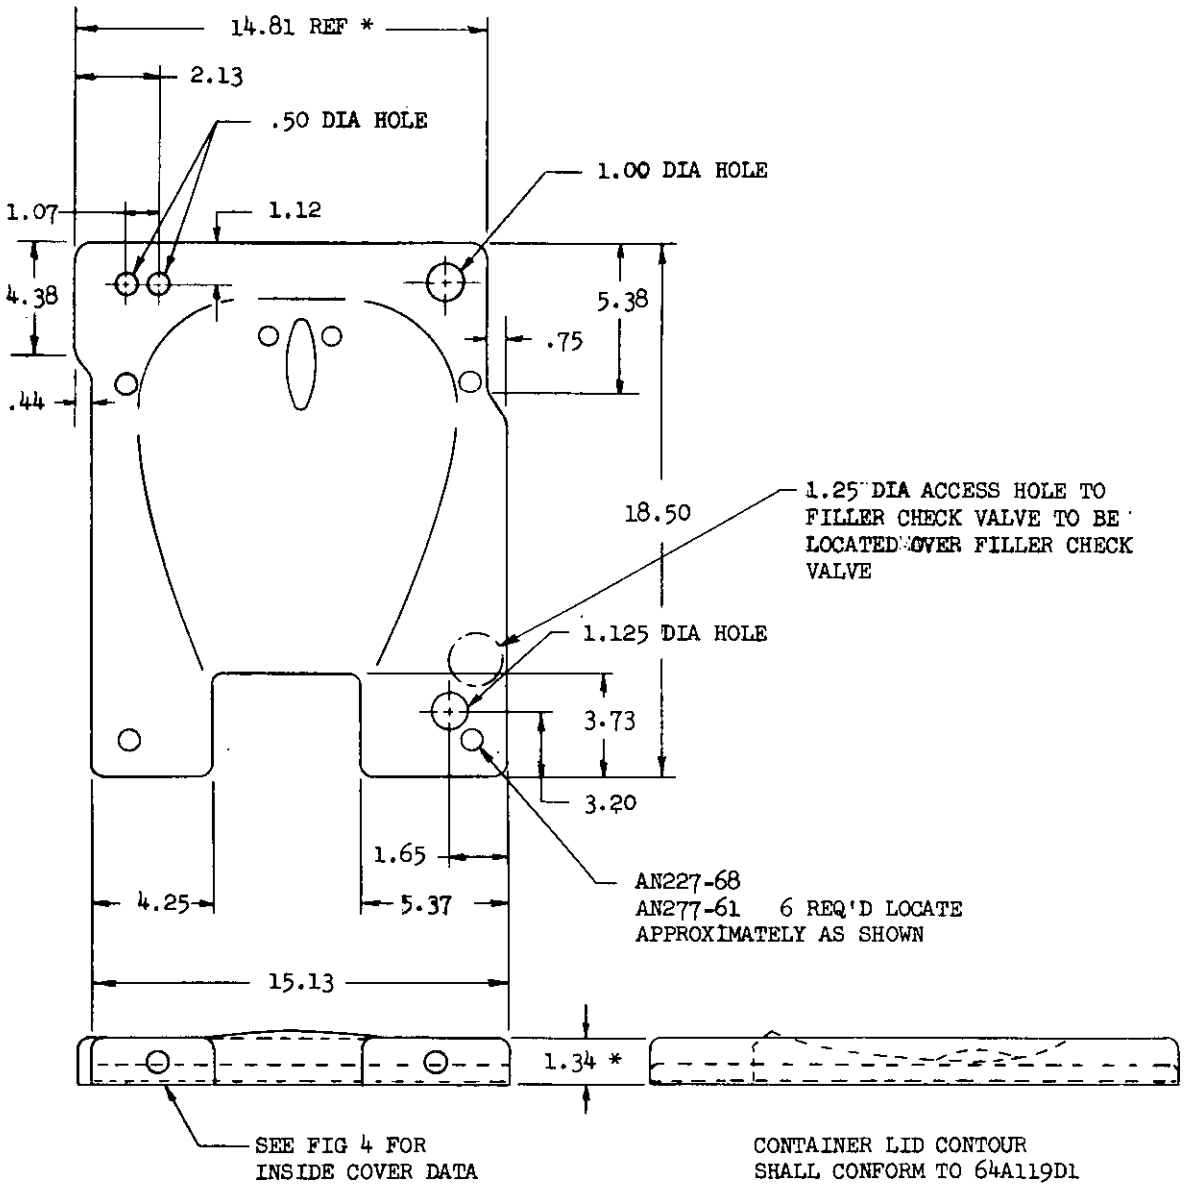

* THESE DIMENSIONS DO NOT INCLUDE METAL SEALER

FIGURE 3. CONTOURED CONTAINER LID

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:55Z
Check the source to verify that this is the current version before use.

RIGID SEAT SURVIVAL KIT-RSSK-6

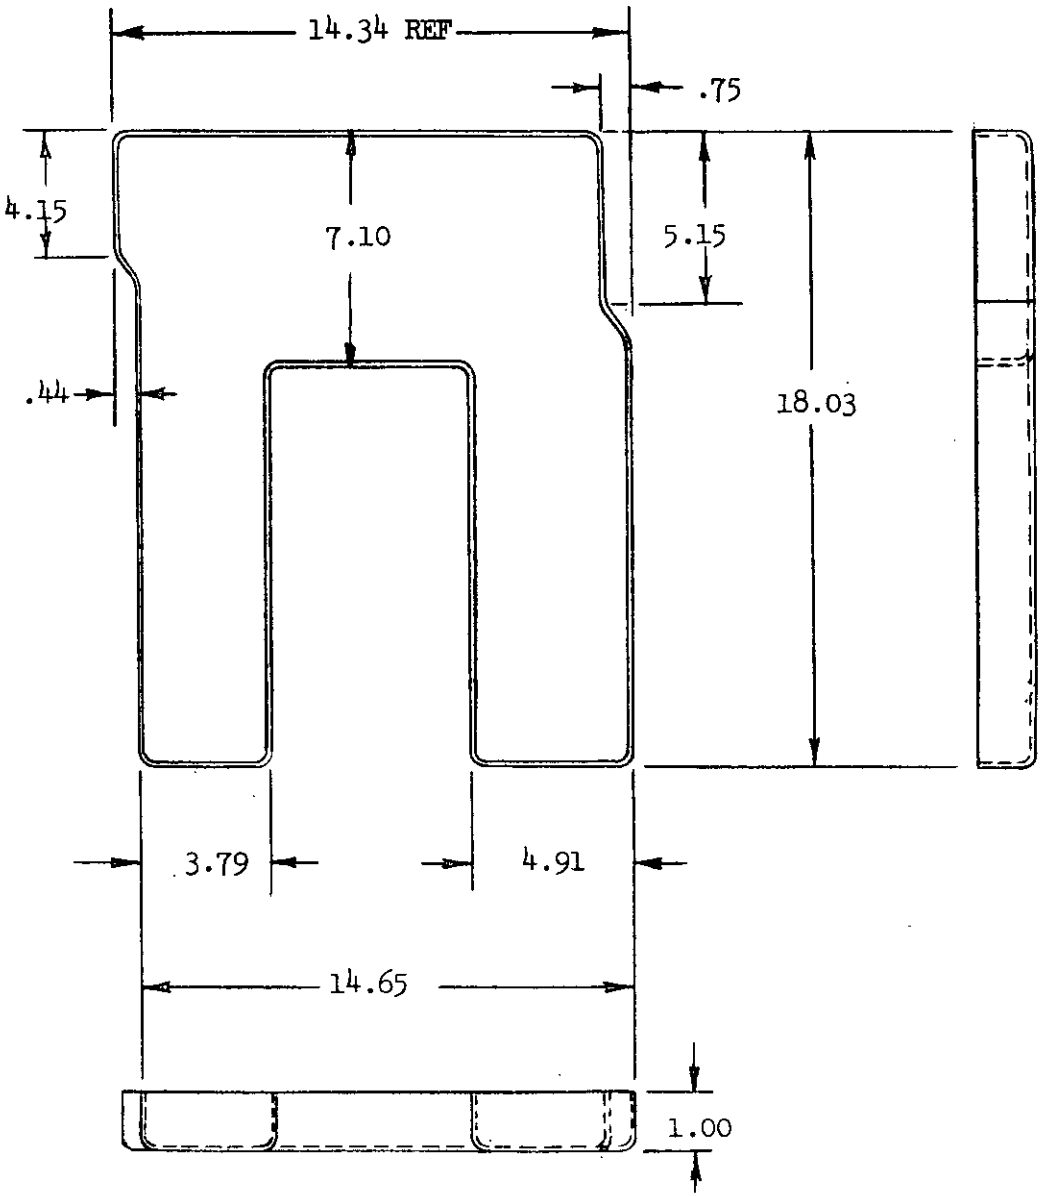


FIGURE 4. INSIDE COVER (LID)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:55Z
Check the source to verify that this is the current version before use.

RIGID SEAT SURVIVAL KIT-RSSK-6

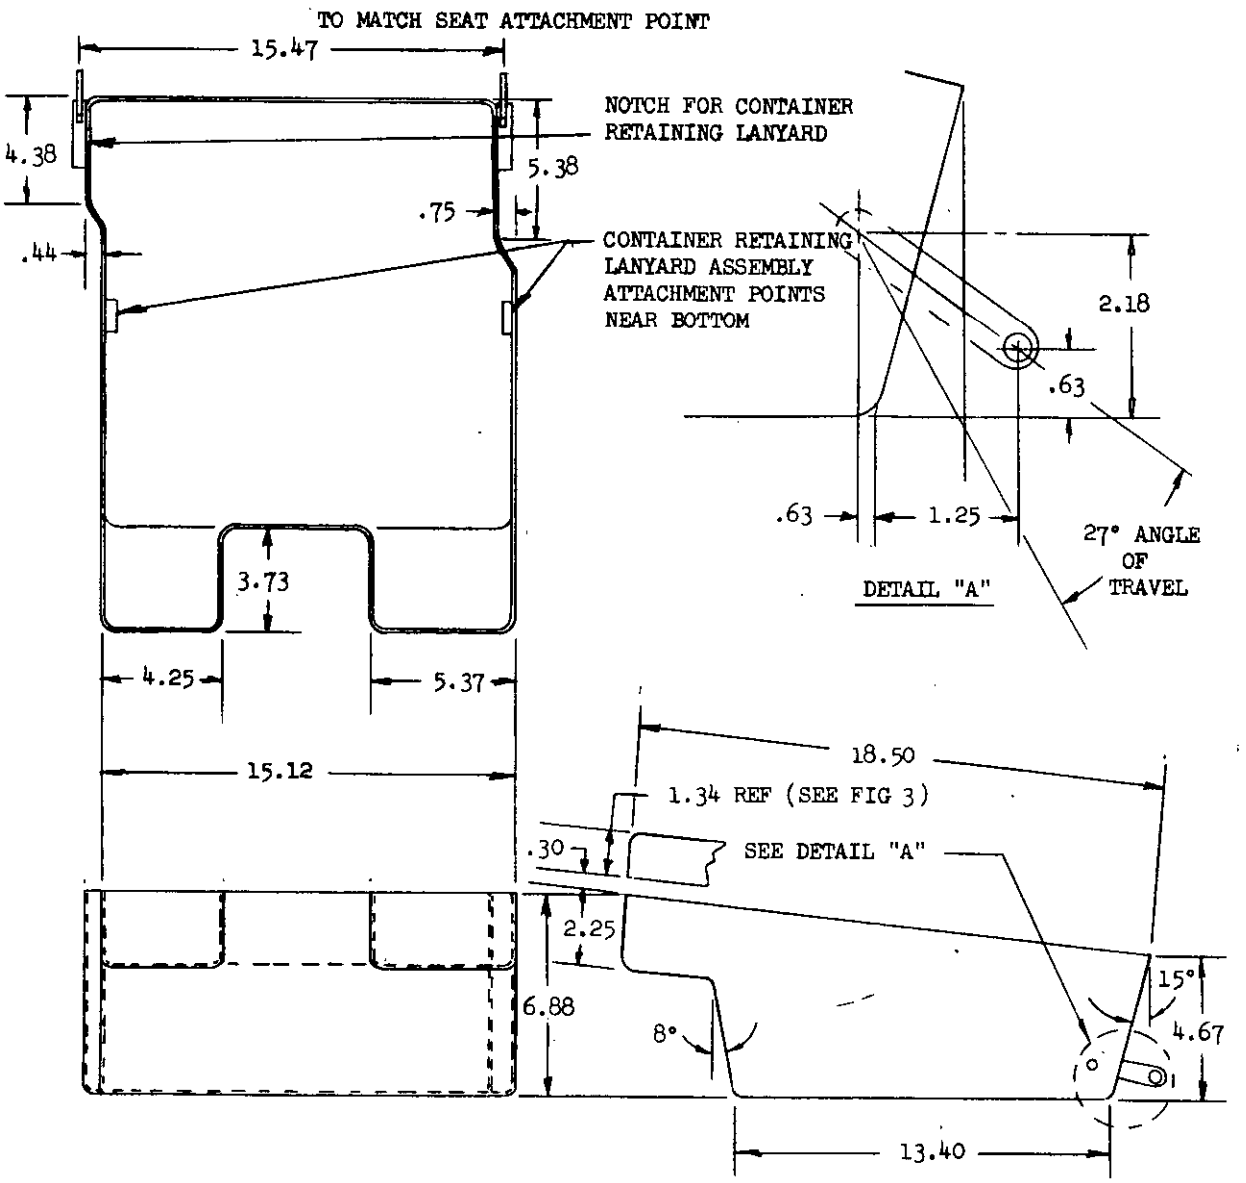


FIGURE 5. CONTAINER BOTTOM

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:55Z
Check the source to verify that this is the current version before use.

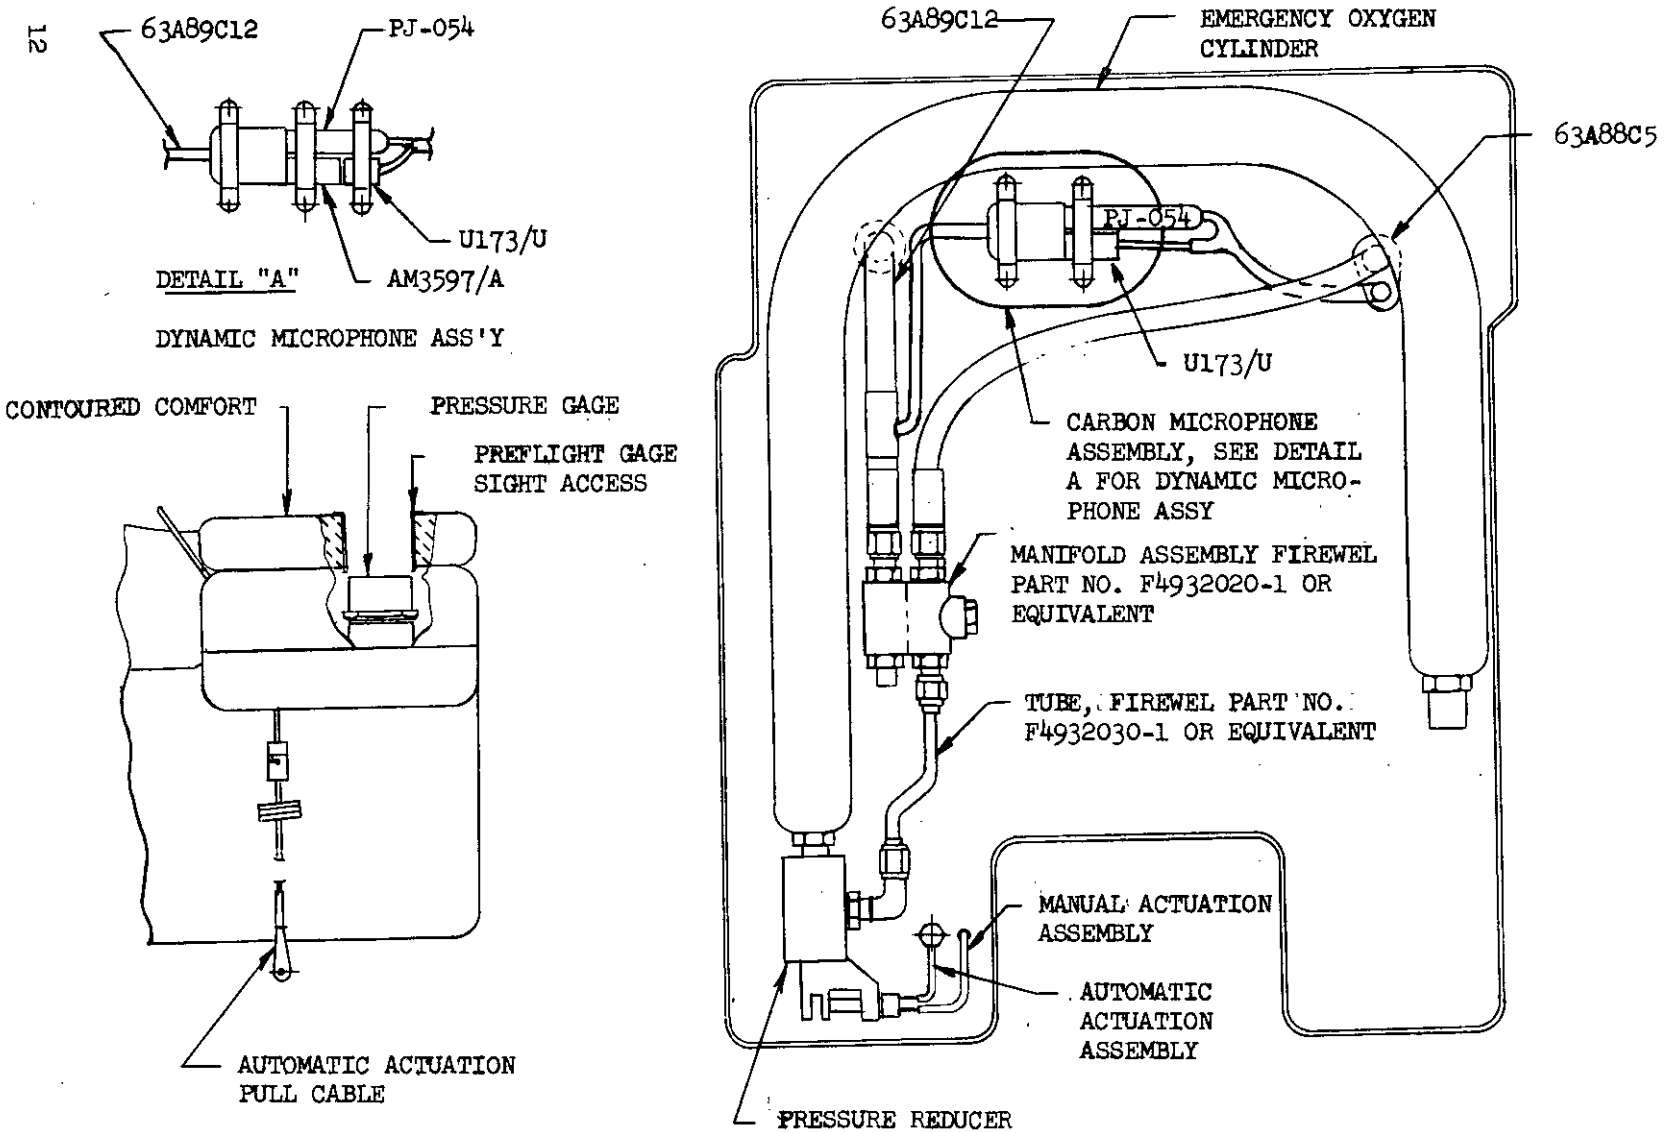


FIGURE 6. EMERGENCY BAILOUT OXYGEN SYSTEM

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:55Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity *(as indicated on reverse hereof)*.

SPECIFICATION

MIL- S-81018/1(WP) SURVIVAL KIT CONTAINER, AIRCRAFT SEAT, WITH OXYGEN-RSSK-6

ORGANIZATION *(Of submitter)*	CITY AND STATE

CONTRACT NO.	QUANTITY OF ITEMS PROCURED	DOLLAR AMOUNT
		$

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES.

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)*	DATE

DD FORM 1 APR 63 1426

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:55Z
Check the source to verify that this is the current version before use.