MILITARY SPECIFICATION

REGULATOR ASSEMBLY: 11747171

This amendment forms a part of Military Specification MIL-R-48577 (MU) dated 27 June 1975.

PAGE 2

Paragraph 3.2.3, Delete and substitute:

"3.3.3 Shock.-The Regulator shall meet the requirements of 3.4 after being subjected to cumulative shocks consisting of 3 each at 100 G's and 40 G's applied in each direction along each of three mutually perpendicular axes. The shock pulse shall have a wave form of approximately a half sine wave. For 100 G's ± 10%, the pulse shall have a time duration of 3 ± .2 milliseconds; for 40 G's ± 10% the shock pulse shall have a time duration of 18 ± 3 milliseconds."

Paragraph 3.3.4, Delete and substitute:

"3.3.4 Vibration "A".-The Regulator shall meet the requirements of 3.4 after being vibrated sinusoidally along each of three mutually perpendicular axes as follows:

a. At a frequency of 5 Hertz (Hz), the acceleration shall be .5G ± 10%.

b. During a frequency sweep of 5 to 9 Hz, increase acceleration linearly from .5G to 1.5G's ± 10%.

c. During a frequency sweep of 9 to 500 Hz, maintain constant acceleration of 1.5 G's ± 10%.

d. During a frequency sweep of 500 to 9 Hz, maintain constant acceleration of 1.5 G's ± 10%.

e. During a frequency sweep of 9 to 5 Hz, decrease acceleration linearly from 1.5 G's to .5 G ± 10%.

f. At 5 Hz, the acceleration shall be .5 G ± 10%.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:32Z
Check the source to verify that this is the current version before use.

The frequency of applied vibration shall be swept logarithmically in 15 minute ± 1 minute sweep cycles for a total of two hours per axis.

PAGE 3

Paragraph 3.3.5, Delete and substitute:

"3.3.5 Vibration "B".-This requirement shall be met with 24 ± 6 Vdc applied and an output current of 500 ma ± 25 ma. The vibration shall be sinusoidal as follows:

a. At a frequency of 5 Hertz (Hz), the acceleration shall be 1.0 G ± 10%.

b. During a frequency sweep of 5 to 500 Hz, maintain constant acceleration of 1.0 G ± 10%.

c. During a frequency sweep of 500 to 5 Hz, maintain constant acceleration of 1.0 G ± 10%.

d. At 5 Hz, the acceleration shall be 1.0 G ± 10%.

The frequency of applied vibration shall be swept logarithmically in 15 minute ± 1 minute sweep for a total of 15 minutes ± 1 minute along each of the three mutually perpendicular axes (total vibration time 45 minutes ± 3 minutes). Following the vibration test, the regulator shall meet the requirements of 3.4."

Paragraph 3.4.4.1, Delete and substitute:

"3.4.4.1 Input voltage surge.-The regulator shall show no evidence of damage and the output voltage shall remain within 2.0 to 3.0 volts during the application of 100 millisecond positive square wave pulses having an amplitude of 80.0 ± 1.0 DC volts. The output voltage shall return to the level specified in 3.4.4.3 within 125 milliseconds after removal of pulses."

Paragraph 3.4.4.3, Delete and substitute:

"3.4.4.3 Output voltage.-The regulator shall deliver a dc voltage of 2.5 ± .3 volts with a rise time of 0.3 seconds or less upon opening test shutter switch."

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:32Z
Check the source to verify that this is the current version before use.

PAGE 10

Paragraph 4.5.7.4.1, Delete and substitute:

"4.5.7.4.1 Input voltage surge.-Utilizing a pulse generator connected to the input terminals, adjust the output current to 500 ± 25 ma. Apply the pulses specified in 3.4.4.1. A series of five pulses shall be applied at a rate of five per minute. The output voltage and recovery time after removal of pulses shall be as specified in 3.4.4.1."

FIGURE 1

Delete and substitute new FIGURE 1.

Custodian:
Army-AR

Preparing Activity:
Army-AR

Project Number: 1240-A728

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:32Z
Check the source to verify that this is the current version before use.

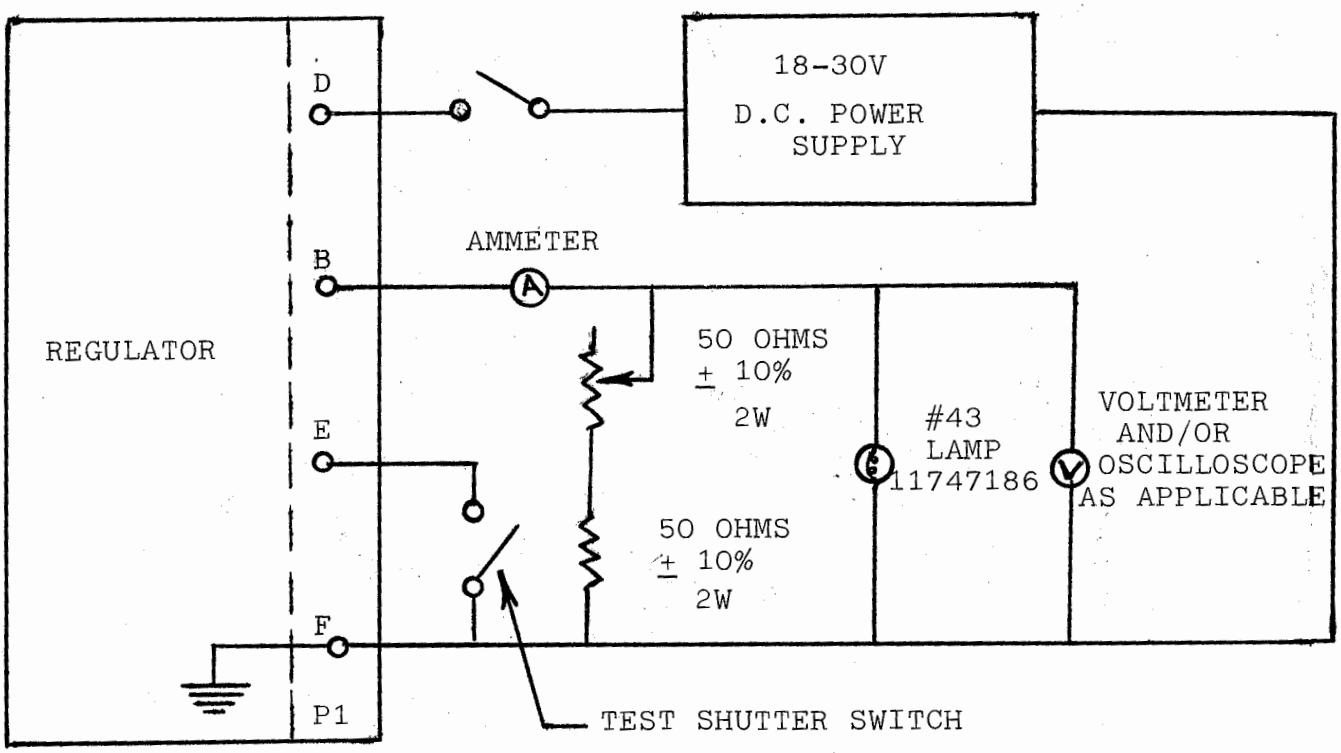

FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:32Z
Check the source to verify that this is the current version before use.