MILITARY SPECIFICATION

COUNTER, TIME INTERVAL: 10547200

1. SCOPE

1.1 This specification covers a Counter, Time Interval: 10547200 which is a modular component of the Range Finder, Laser, AN/GVS-3 (see 6.1).

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposals, form a part of this specification to the extent specified herein.

SPECIFICATIONS

Military

MIL-F-13926	Fire Control Materiel, General Specification Governing the Manufacture and Inspection of
MIL-P-14232	Parts, Equipment and Tools for Army Materiel: Packaging and Packing of
MIL-I-45607	Inspection Equipment, Acquisition, Maintenance and Disposition of
MIL-C-60576	Circuit Card Assembly - Oscillator, Quinary Memory and Tens Matrix - A1
MIL-C-60577	Circuit Card Assembly - Thousands Decade, Memory and Readout - A2
MIL-C-60578	Circuit Card Assembly - Power Supply, Hundreds Decade, Matrix and Readout - A3
MIL-C-60579	Circuit Card Assembly Target Counter, Memory and Readout - A4
MIL-C-60580	Circuit Card Assembly - Main - A5
MIL-P-46843	Printed Circuit Assemblies, Design and Production of

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:26Z
Check the source to verify that this is the current version before use.

STANDARDS

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-109	Quality Assurance Terms and Definitions
MIL-STD-810	Environmental Test Methods

DRAWINGS

U. S. Army Frankford Arsenal

D10547200	Counter, Time Interval
C10540723	Connector

PACKAGING DATA SHEET

10547200	Packaging of Counter Time Interval

(Copies of specifications, standards, drawings and packaging data sheets required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Materials.- Materials shall be in accordance with the drawings, general specifications and material specifications forming a part of this specification.

3.2 Fabrication.- The Time Interval Counter, hereinafter referred to as counter, shall be manufactured in accordance with Drawing D10547200 and drawings pertaining thereto. The following modules shall have met their respective specifications and be interchangeable within the requirements of this specification.

MIL-C-60576	Circuit Card Assembly - Oscillator, Quinary Memory Tens Matrix - A1
MIL-C-60577	Circuit Card Assembly - Thousands Decade, Memory Readout - A2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:26Z
Check the source to verify that this is the current version before use.

MIL-C-60578	Circuit Card Assembly - Power Supply, Hundreds Decade, Matrix and Readout - A3
MIL-C-60579	Circuit Card Assembly - Target Counter, Memory and Readout - A4
MIL-C-60580	Circuit Card Assembly - Main - A5

3.3 General specifications.- The counter shall meet the following requirements of MIL-F-13926 and MIL-P-46843:

a. Order of precedence
b. Dimensions and tolerances
c. Inorganic protective surface finishes
d. Part identification and marking
e. Workmanship
f. Soldering electrical connections

3.4 Vibration.- The counter shall withstand vibrations for 15 minutes. in each of three mutually perpendicular directions. Vibration in each direction shall be at frequencies varied logarithmically from 5 to 500 cycles per second (cps). The double amplitude of the applied vibrations shall be .036 inch at lower frequencies and shall be maintained at, but not exceed, a 5G level at higher frequencies. Subsequent to vibration, the counter shall show no evidence of physical damage and shall meet the requirements 3.7 through 3.9.

3.5 Shock.- The counter shall withstand a total of six shock impulses, one in each direction of three mutually perpendicular axes. Each shock shall be half-sinusoidal in shape, with a time duration of 11 ± 1 milliseconds. The peak amplitude of each shock impulse shall be 75 G's. Subsequent to shock, the counter shall show no evidence of physical damage and shall meet the requirements of 3.7 through 3.9.

3.6 Storage temperature.- The counter shall be capable of withstanding thermal stabilization and a three hour soaking period at -80°F and +160°F. Subsequent to exposure to the temperatures specified herein, the counter shall show no evidence of physical damage and shall meet the requirements of 3.7 through 3.9.

3.7 Operating temperature.- The counter shall meet the requirements of 3.8 through 3.9 at all temperatures between -65°Fahrenheit (°F) and +155°F, inclusive.

3.8 Performance.- The assembly shall be operable when supply voltages are applied as follows:

27.3 ± 4.2 VDC applied to Pin L of Socket 25J2
9.0 ± 1.3 VDC applied to Pin E of Socket 25J2

3.8.1 Power Control.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:26Z
Check the source to verify that this is the current version before use.

3.8.1.1 Power Turn-on.- Application of a positive 1.5 ± 0.1V pulse of duration 2.0 ± 0.1 microsec to Pin Z of Plug 25P1 shall cause the assembly to be placed in an operational mode and assume a range count of zero and a target count of zero (reset condition). The following output voltages shall be established when the counter assembly is in an operational mode:

5.5 ± 0.3 VDC across a 150 ohm load at Pin D of Plug 25P1.
3.5 ± 0.2 VDC across a 360 ohm load at Pin C of Plug 25P1.

3.8.1.2 Power Turn-off.- Subsequent application of a positive 2.5 ± 0.1V pulse of duration 5.0 ± 1.0 microsec to Pin K of 25P1 shall cause the output voltages at Pins C and D to vanish within 2.0 ± 0.3 milliseconds after the pulse has been applied to Pin K.

3.8.1.3 Test function.- Application of a 3.0 ± 0.1 VDC level to Pin U of Socket 25J2 shall cause a 1.1 ± 0.1 VDC level to appear at Pin R of 25P1 and the DC output voltages at Pins D and C to appear as described above and remain present as long as the DC level is applied to Pin U.

3.8.2 Range measurement.

3.8.2.1 Maximum range control.- When the assembly is in an operational mode (3.8.1.1), application of a positive 1.7 ± 0.1V pulse of 1.0 ± 0.5 microsec duration to Pin A of Plug 25P1 shall initiate the range counting cycle which shall have a duration of 135 ± 5 microsec. After this period, the counter shall attain a range reading of 0040 ± 20.

3.8.2.2 Time interval counting.- The counter shall be capable of beginning a range counting operation when a positive 1.7 ± 0.1V pulse is applied to Pin A of 25P1, and completing this operation when a negative pulse of 4.0 ± 1.0V amplitude and 100 ± 10 nsec in duration is applied to Pin E. The pulse which terminates the counting operation is selected by Switch 10547296 and may be any one of the first five pulses applied to Pin E. When the switch is set fully clockwise the first pulse shall terminate the counting operation and as the switch is rotated counterclockwise to different settings, additional pulses up to a maximum of 5 shall be required to terminate the counting operation. The assembly shall measure the time of the range counting operation and convert this into a range measurement with the ratio of 150 meters of range for every microsecond of the counting interval.

3.8.2.3 Pulse counting.- When the assembly is in the operational mode, the application of 1.1 ± 0.1 VDC level to Pin "a" of socket 25J2 shall enable the assembly to count negative pulses of 4.0 ± 1.0V amplitude and 100 ± 10 nsec duration that are subsequently applied to Pin E of 25P1 during the maximum range interval of 3.8.2.1. The assembly shall count only five such pulses. Additional pulses shall be counted only when Pin U is maintained at a DC level of 1.2 ± 0.1V.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:26Z
Check the source to verify that this is the current version before use.

3.8.2.4 Minimum ranges.- The assembly shall accept only those pulses which are present at Pin E of 25P1 following the elapsed time delay selected by interconnection of Pin "a" of Socket 25J2 to Pin V, W, X, Y or Z of socket 25J2. The time delays associated with these interconnections shall permit the least possible range to be 200m, 600m, 1000m, 2000m or 3000m for the interconnection of Pin "a" to V, W, X, Y or Z respectively.

3.8.3 Power source monitor.- The assembly shall be able to detect a situation in which either of the power sources applied to Pins L and E of 25J2 are supplying voltages less than 21 ± 1 VDC and 7.2 ± 0.2 VDC respectively.

3.8.4 Memory.- The assembly shall have the capability to retain the information obtained in 3.8.1.1, 3.8.2.2 and 3.8.2.3 when the counter is placed in standby mode by the application of the pulse to Pin K of 25P1 (3.8.1.2).

3.8.5 Display.- The information retained by the assembly in 3.8.4 shall be visually displayed by the numeric display and neon indicators when 160 ± 10 VDC is applied to Pin L of 25P1. The current required from the 160V power source shall not exceed 10 ma.

3.8.5.1 Reset display.- The indication of the reset condition (3.8.1.1) shall be the numeral "7" superimposed over the zero digit in the units column of the numeric display.

3.8.5.2 10KM range display.- The indication of a range measurement which exceeds 10KM shall be a "1" superimposed in the units column of the numeric display.

3.8.5.3 Low power source display.- The indication that either of the power sources are below the limits of 3.8.3 shall be a "2" superimposed in the units column of the numeric display.

3.8.6 Electrical continuity.

3.8.6.1 Electrical continuity shall be present between the following locations on Plug 25P1 and Socket 25J2 as shown below:

From Pin on Plug 25P1	To Pin on Socket 25J2	Nominal Resistance or Component Present
f	H	0
e	M	0
c	N	0
T	J	0
S	K	0
X	A	0
W	D	0
h	C	470 K ohm
h	E	.047 microfarads
h	T	0
H	P	1 K ohm

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:26Z
Check the source to verify that this is the current version before use.

3.8.6.2 Electrical continuity shall be present between the following pins on Socket 25J2 as shown below:

Pin	Pin	Resistance Value or Component Present
B	F	1 K ohm
R	S	.02 microfarads

3.8.6.3 Electrical continuity shall be present between the following pins of plug 25P1 as shown below:

Pin	Pin	Component Value Present
H	h	2.2 microfarads

3.9 Interface requirements.

a. Connector, 10540723 from the counter shall interface with the main connector panel in the telescope assembly.

b. The Connector MS24049-3 of the display panel shall interface with the counter.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 General provisions.- The component and subassembly inspection requirements of MIL-F-13926 form a part of the quality assurance provisions of this specification. Definitions of inspection terms shall be as listed in MIL-STD-109.

4.2 First article (initial production) approval.- The requirement for first article approval and the responsibility (Government or contractor) for first article testing shall be as specified in the contract. The sample for first article approval tests shall consist of 3 counters manufactured in the same manner using the same materials, equipment, processes, and procedures as used in regular production. All parts and materials, including packaging and packing, shall be obtained from the same source of supply as used in regular production.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:26Z
Check the source to verify that this is the current version before use.

4.2.2 Contractor testing.- When the contractor is responsible for conducting first article approval tests, the sample shall be inspected by the contractor for all the requirements of the contract. The sample and a record of this inspection, including certificates of conformance for materials, shall be submitted to the Government for approval. The Government reserves the right to witness the contractor's inspection.

4.3 Inspection provisions.

4.3.1 Submission of product.- Unless otherwise specified by the contracting officer, inspection lot size, lot formation and presentation of lots shall be in accordance with "Submission of Product" provisions of MIL-STD-105.

4.3.2 Examination and tests.

4.3.2.1 Components and subassemblies.- All components and subassemblies shall be inspected in accordance with the inspection provisions contained in Supplementary Quality Assurance Provisions (SQAP) listed in the technical data package (TDP). In the absence of SQAP's, the applicable Quality Assurance Provisions of MIL-F-13926 shall apply. Examination and tests related to Section 3 herein shall be performed on a single defect (individual characteristic) basis in accordance with MIL-STD-105 and the sampling plans specified in Tables I, II & III herein. Examination and tests for packaging, packing, and marking shall be in accordance with MIL-P-14232 and Section 5 herein. The tabulated classification of defects in Tables I, II & III shall constitute the minimum inspection to be performed by the supplier after first article approval and prior to Government acceptance or rejection by item or lot.

TABLE I - CLASSIFICATION OF DEFECTS
(100% INSPECTION)

	CHARACTERISTIC	REQUIREMENT	TEST PROCEDURE
101.	Power turn-on	3.8.1.1	4.6.5.2
102.	Power turn-off	3.8.1.2	4.6.5.2
103.	Test function	3.8.1.3	4.6.5.3
104.	Maximum range control	3.8.2.1	4.6.5.4.1
105.	Range counter	3.8.2.2	4.6.5.4.2
106.	Minimum range	3.8.2.4	4.6.5.4.3
107.	Pulse counter	3.8.2.3	4.6.5.4.4
108.	Power source monitor	3.8.3	4.6.5.5
109.	Memory	3.8.4	4.6.5.7
110.	Reset display	3.8.5.1	4.6.5.2
111.	10 Km Range display	3.8.5.2	4.6.5.6
112.	Low power source display	3.8.5.3	4.6.5.5
113.	Electrical continuity	3.8.6 thru 3.8.6.3	4.6.5.8
114.	Interface	3.9	4.6.6

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:26Z
Check the source to verify that this is the current version before use.

4.4 Special sampling.

4.4.1 General.- Three (3) counters shall be selected at random as a special sampling from each 100 produced. The sample shall meet the requirements and tests in Table II.

TABLE II

	CHARACTERISTIC	REQUIREMENT	TEST PROCEDURE
301.	Materials	3.1	Applicable dwgs & specs - visual
302.	Fabrication	3.2	Applicable dwgs & specs - visual
303.	General specification	3.3	MIL-F-13926,MIL-P-46843 visual

NOTE: The tests in Table II shall be conducted at a temperature between +70°F and +80°F.

4.4.2 Environmental.- Three (3) counters shall be selected at random as samples from each 50 produced, or from each month's production, whichever occurs first. Each sample shall meet the requirements and tests in Table III and shall then meet the requirements and tests in Table I.

TABLE III

	CHARACTERISTIC	REQUIREMENT	TEST PROCEDURE
304.	Vibration (+70°F and +80°F)	3.4	4.6.3
305.	Shock (+70°F and +80°F)	3.5	4.6.2
306.	Storage temperature	3.6	4.6.1.1
307.	Performance (-65°F and +155°F)	3.7 through 3.8.6.3	4.6.4 through 4.6.5.8

4.4.3 Failure of sample.- Should any one item of a special sampling fail to meet the specified test requirements, acceptance of the represented inspection lot shall be suspended by the Government until necessary corrections have been made by the contractor and the resubmitted items have been approved (see 4.3.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:26Z
Check the source to verify that this is the current version before use.

4.5 Inspection equipment.- Except as otherwise provided for by the contract, the contractor shall supply and maintain inspection equipment in accordance with the applicable requirements of MIL-I-45607.

4.5.1 Government furnished inspection equipment.- Where the contract provides for Government furnished test equipment, supply and maintenance of test equipment shall be in accordance with applicable requirements specified in MIL-I-45607.

4.5.2 Contractor furnished inspection equipment.

4.5.2.1 Government design.- All inspection equipment specified by drawing number in specifications or SQAP forming a part of the contract shall be supplied by the contractor in accordance with technical data included in the technical data package list.

4.5.2.2 Contractor design.- The contractor shall design and supply inspection equipment compatible with the "Test Methods and Procedures" specified in 4.6 of this specification and with the component inspection procedures specified in "Examination" and "Test Facilities" requirements of MIL-F-13926. Since tolerance of test equipment is normally considered to be within 10% of the product tolerance for which it is intended, this inherent error in the test equipment design must be considered as part of the prescribed product tolerance limit. Thus, concept, construction, materials, dimensions and tolerances used in the design of test equipment shall be so selected and controlled as to insure that the test equipment will reliably indicate acceptability of a product which does not exceed 90% of the prescribed tolerance limit, and permit positive rejection when non-conforming. Construction shall be such as to facilitate routine calibration of test equipment.

4.5.3 Test equipment.- In conjunction with 4.5.2.2 the following standard test equipment shall be utilized in the performance of the applicable tests as specified in 4.6.

	NOMENCLATURE	DESCRIPTION
1.	DC Power Supply	Range 0-30 V, current capability 1 ampere (3 required)
2.	Oscilloscope	Dual channel, risetime of scope plus measuring probe 10 nsec or less, sweep rate 50 nsec per cm. or faster, input resistance no less than 8 megohms, input capacitance less than 15 picofarads
3.	DC Power Supply	160 ± 5 VDC output, 10 ma capability
4.	Signal Generator (2 channel output)	Channel A - capable of generating a single positive pulse of 1.7 ± 0.1V amplitude and 1.0 ± 0.5 microsec pulse width. Channel B - capable of generating multiple negative pulses of amplitude 4.0 ± 1.0V,

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:26Z
Check the source to verify that this is the current version before use.

and 100 ± 10 nsec pulse width separated by 5.0 microsec intervals. The outputs from Channel B shall be separated from the output of Channel A by a delay variable from 1 to 100 microsec. The number of negative pulses generated by Channel B shall be selectable from 0 to 6 pulses.

4.6 Test methods and procedures.

4.6.1 Environmental.- The counters shall be thoroughly examined for physical defects after each environmental test. A visual and tactile examination shall be made for missing parts and physical damage. Upon completion of all environmental tests, the counter shall be subjected to the tests specified in 4.6.4 through 4.6.6.

4.6.1.1 Storage temperatures.- The test equipment utilized in this test shall be in accordance with the "Test Facilities" requirements of MIL-F-13926. The test shall be performed as specified in Procedure II of MIL-F-13926 at the temperature specified in 3.6.

4.6.2 Shock.- The test equipment utilized in this test shall be in accordance with the "Test Facilities" requirements of MIL-F-13926. The test shall be performed as specified in Procedure II of MIL-F-13926 except the shock pulse shall comply with the wave form, time duration and peak "G" value specified in 3.5.

4.6.3 Vibration.- The test equipment utilized in this test shall conform to the vibration apparatus requirements specified in MIL-STD-810. The counter shall be firmly mounted to the vibration table. The vibration equipment shall provide the conditions of acceleration amplitude, frequency and duration specified in 3.4. The vibration test shall then be performed in accordance with Method 514 Procedure 1, Part 1, of MIL-STD-810.

4.6.4 Operational temperatures.- The test shall be performed in accordance with Procedure I of MIL-F-13926 at the extreme temperatures specified in 3.7, utilizing the testing equipment indicated in 4.6.1.1. The counter shall be exposed to each specified temperature for a period of 2 hours. At the end of each 2 hour period, and while still at the specified temperature, the counter shall be subjected to the tests in 4.6.5 through 4.6.5.8. The counter shall conform to the requirements of 3.8 through 3.8.6.3.

4.6.5 Performance.

4.6.5.1 Preparation for testing.- Connect the positive side of a nominal 27VDC source, and the positive side of the nominal 9VDC source to Pins L and E respectively of Socket 25J2. Connect the 160 ±5VDC supply to Pin L

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:26Z
Check the source to verify that this is the current version before use.

of Plug 25P1, through an ammeter capable of measuring 10 ma. Connect the test circuitry as shown in Fig. 1 with the negative side of the power sources connected to ground. These connections shall remain in place for all subsequent tests for compliance with 3.8 through 3.8.6.3.

4.6.5.2 Power control.- Apply the positive pulse specified in 3.8.1.1 to Pin Z of Plug 25P1. Output voltages shall appear at Pins D and C of Plug 25P1 as specified in 3.8.1.1 and the display shall be four zeros with the digit seven superimposed in the units column in the numeric display, and none of the neon indicators energized. While monitoring the voltages at Pin D and C, apply the positive pulse specified in 3.8.1.2 to Pin K of Plug 25P1. Check that the outputs at Pin D and C vanish within the time specified in 3.8.1.2.

4.6.5.3 Test function.- Apply 3 volts through a 1.0 Kohm resistor to Pin U of Socket 25J2. Measure the DC voltage outputs at Pins D and C of Plug 25P1 for compliance with 3.8.1.1 and measure the DC voltage level at Pin R of Plug 25P1 for compliance with 3.8.1.3.

4.6.5.4 Range measurement.

4.6.5.4.1 Maximum range control.- Apply the positive pulse to Pin Z of Plug 25P1 (4.6.5.2). Apply the pulse specified in 3.8.2.1 to Pin A of Plug 25P1 while monitoring TP 22 with an oscilloscope. The waveform appearing at TP 22 shall be present for 135 ± 5 microsec following application of the pulse to Pin A.

4.6.5.4.2 Time interval counting.- Set the target select switch to its full CW position. Apply the positive pulse to Pin Z of Plug 25P1 (4.6.5.2). Apply the positive and negative pulses specified in 3.8.2.2 to Pins A and E of Plug 25P1. Apply the negative pulse to Pin E after a time delay of 40 micro seconds following application of the pulse to Pin A. The display shall be a 6000 ± 300 meter range reading with one neon indicator lighted to indicate detection of one pulse at Pin E and the current required from the 160V power supply shall not exceed the limit specified in 3.8.5.

Set the target select switch to the first CCW position. Repeat the above procedure applying two negative pulses to Pin E, one with a time delay of 21.0 ± 0.1 microsec and the other with a 40.0 ± 0.1 microsec delay. The display shall be a 6000 ± 300 meter range reading with only the second neon indicator lighted to indicate detection of two pulses at Pin E.

Set the target select switch to the second ccw position. Repeat the above procedure applying 3 negative pulses to Pin E with time delays of 21.0 ± 0.1 microsec, 25.0 ± 0.1 microsec and 40.0 ± 0.1 microsec. The display shall be a 6000 ± 300 meter range reading with only the third neon indicator lighted to indicate the detection of 3 pulses at Pin E.

Set the target select switch to the third CCW position. Repeat the above procedure applying 4 negative pulses to Pin E with delays of 21.0 ± 0.1 microsec, 25.0 ± 0.1 microsec, 30.0 ± 0.1 microsec and 40.0 ± 0.1 microsec. The display shall be a 6000 ± 300 meter range reading with only the fourth neon indicator lighted to indicate the detection of 4 pulses at Pin E.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:26Z
Check the source to verify that this is the current version before use.

Set the target select switch to the full CCW position. Repeat the above procedure applying 5 negative pulses to Pin E with delays of 21.0 ± 0.1 microsec, 25.0 ± 0.1 microsec, 30.0 ± 0.1 microsec, 35.0 ± 0.1 microsec and 40.0 ± 0.1 microsec. The display shall be a 6000 ± 300 meter range reading with only the last neon indicator lighted to indicate the detection of 5 pulses at Pin E.

4.6.5.4.3 Minimum ranges.- Apply the positive pulse to Pin Z of Plug 25P1 (4.6.5.2). With the target select switch set in its full CCW position, apply the positive and negative pulses to Pins A and E as in 4.6.5.4.2. The delay between the pulses shall be variable from 1 microsec to 40 microsec. Connect Pins a and V of Socket 25J2, and vary the delay from 1 microsec to 10 microsec while applying the pulses to Pins A and E. The minimum range display shall be greater than 0200 but less than 0235. Connect Pins a and W of Socket 25J2 and repeat the above procedure. The minimum range shall be greater than 0600 but less than 0635. Connect Pins a and X of Socket 25J2 and repeat the above procedure. The minimum range shall be greater than 1000 but less than 1035. Connect Pins a and Y of Socket 25J2 and repeat the above procedure. The minimum range shall be greater than 2000 but less than 2035. Connect Pins a and Z of Socket 25J2 and repeat the above procedure. The minimum range shall be greater than 3000 but less than 3035.

4.6.5.4.4 Pulse counting.- Connect Pins a and V of Socket 25J2. Apply the positive pulse to Pin Z of Plug 25P1 (4.6.5.2). Apply the positive pulse to Pin A of Plug 25P1 as specified in 3.8.2.1. Between 10 microsec and 100 microsec following the application of the pulse to Pin A, apply six (6) of the pulses specified in 3.8.2.3 to Pin E of Plug 25P1. One neon indicator shall light to show that only five (5) of these pulses have been detected. Repeat the above procedure with 5, 4, 3, 2, 1 and 0 pulses applied to Pin E of Plug 25P1. One neon indicator shall light to show that the number of pulses detected was equal to the number of pulses applied to Pin E. Apply 3V through a 1K ohm resistor to Pin U of 25J2. Continually apply pulses to Pin E of 25P1 at a rate which allows convenient observation of the pulse counter display. Note that the neon indicators cycle, as the pulses are applied.

4.6.5.5 Power source monitor.- Decrease the input voltage at Pin L of Plug 25J2 below 20VDC. The digit "2" shall be displayed in the units column of the numeric display. Increase the voltage on Pin L of 25J2 to 28V and decrease the input voltage of Pin E of Plug 25J2 below 7.0VDC. The digit "2" shall be displayed in the units column of the numeric display.

4.6.5.6 Range measurement greater than 10 KM.- Repeat procedure 4.6.5.4.2 with a delay of 70 ± 1 microsec between the pulses applied to Pins A and E of Plug 25P1. The range display shall have a single numeric indication on 3 of the numeric indicators and the numeral zero (0) or 5 with the digit 1 superimposed in the units column.

4.6.5.7 Memory.- Following the test procedures specified in 4.6.5.4 to 4.6.5.6, apply the pulse to Pin K of Plug 25P1 as specified in 4.6.5.2. The display on the numeric and neon indicators shall be unchanged from that which was present prior to application of this pulse.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:26Z
Check the source to verify that this is the current version before use.

4.6.5.8 Electrical continuity.- Using a standard measuring equipment (SME) check the wiring of the assembly for compliance with 3.8.6.1 through 3.8.6.3.

4.6.6 Interface.- The counter shall be engaged to the test connectors specified in 3.9 designed with pertinent interfaces conforming to requirements of drawings specified. Continuity between all connectors and test connectors shall be indicated when fully engaged.

5. PREPARATION FOR DELIVERY

5.1 Packaging, packing and marking.- Packaging, packing and marking shall be in accordance with MIL-P-14232 and packaging data sheet 10547200. The level of protection shall be as specified in the procurement document.

6. NOTES

6.1 Intended use.- The Counter, Time Interval performs range, measurement and target counting functions. It is a part of the Range Finder, Laser, AN/GVS-3.

6.2 Ordering data.- Procurement documents should specify the following:

a. Title, number and date of this specification.
b. Selection of applicable levels of preservation, packaging and packing.
c. Order of document precedence.
d. Provisions for First Article testing.

Custodian:
Army - MU

Preparing Activity
Army - MU
Project No. 1240-A164

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:26Z
Check the source to verify that this is the current version before use.

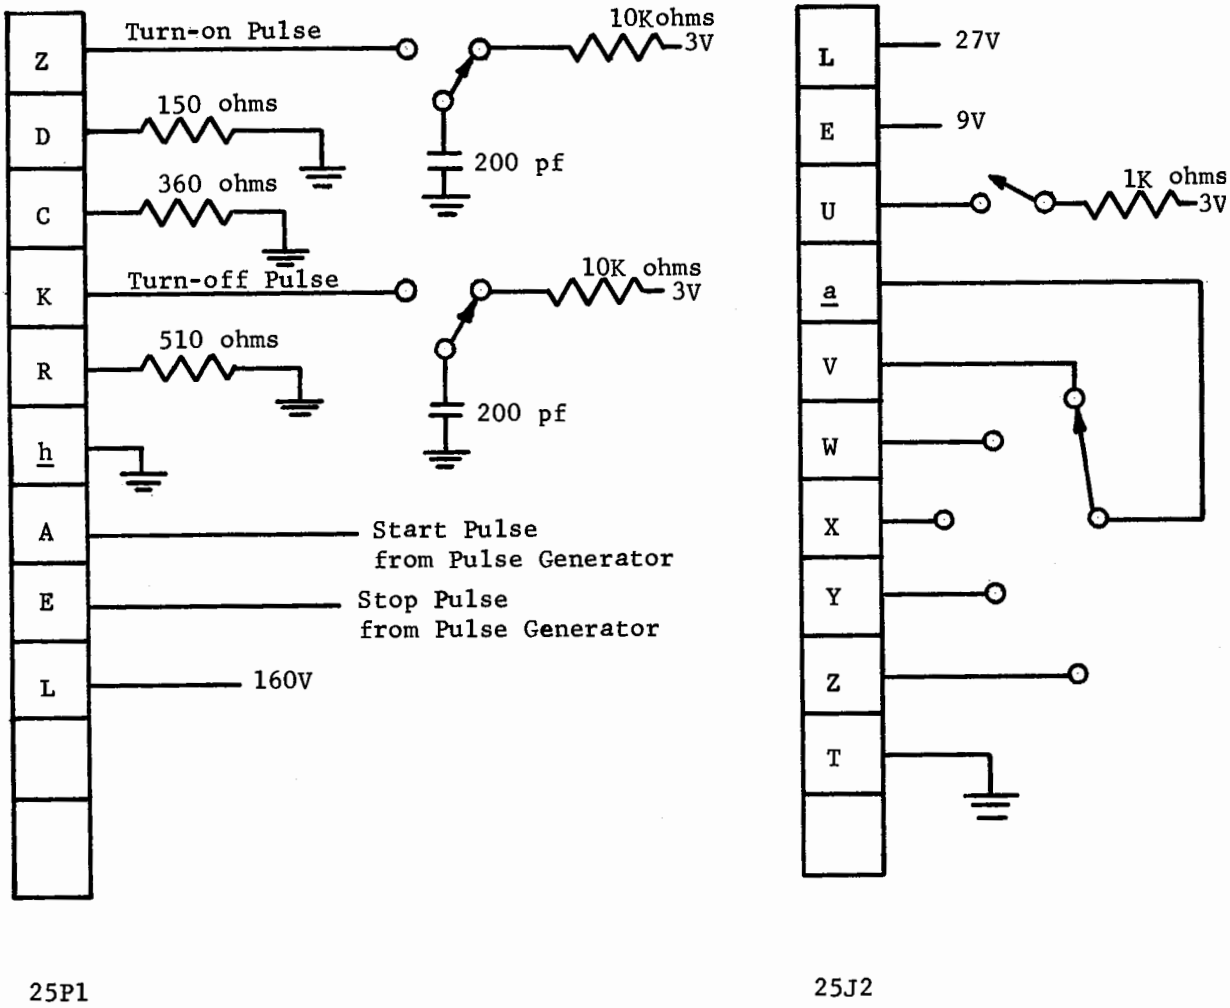


FIGURE 1

TEST FIXTURE, TIME INTERVAL COUNTER

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:26Z
Check the source to verify that this is the current version before use.