MIL-C-60299A (MU)
18 June 1970
SUPERSEDING
MIL-C-60299(MU)
27 September 1966

MILITARY SPECIFICATION

CHARGER, BATTERY: 10541243

1. SCOPE

1.1 This specification covers an electronic battery charger which can be operated from either an alternating current or a direct current source. The charger is a system component for the Range Finder, LASER, AN/GVS-3 (see 6.1).

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposals, form a part of this specification to the extent specified herein.

SPECIFICATIONS

Military

MIL-F-13926	Fire Control Materiel: General Specification Governing the Manufacture and Inspection of
MIL-P-14232	Parts, Equipment and Tools for Army Materiel, Packaging of
MIL-I-45607	Inspection Equipment, Acquisition, Maintenance and Disposition of
MIL-P-46843	Printed Circuit Assemblies, Design and Production of

STANDARDS

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-109	Quality Assurance Terms and Definitions
MIL-STD-202	Test Methods for Electronic and Electrical Component Parts
MIL-STD-810	Environmental Test Methods
MIL-STD-461	Electromagnetic Interference Characteristics Requirements for Equipment

DRAWINGS

U.S. Army, Frankford Arsenal

F10541243	Battery Charger

PACKAGING DATA SHEET

10541243	Packaging of Battery Charger

FSC 1240

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:26Z
Check the source to verify that this is the current version before use.

(Copies of specifications, standards, drawings and packaging data sheets required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Materials.- Materials shall be in accordance with drawings and material specifications forming a part of this specification.

3.2 Fabrication.- The charger shall be manufactured in accordance with Drawing F10541243 and drawings pertaining thereto.

3.3 General specification.- The charger shall meet the following requirements of MIL-F-13926 and MIL-P-46843:

a. Dimensions and tolerances
b. Inorganic protective surface finishes
c. Part identification and marking
d. Workmanship
e. Soldering electrical connections.
f. Electrical and electronic assemblies

3.4 Environmental.- The charger shall have its cover completely open during the performance of 3.4.3, 3.4.5, 3.4.6, 3.4.7 and 3.4.8.

3.4.1 Vibration.- The charger shall withstand vibration for 15 minutes each in 3 mutually perpendicular directions. Vibration in each direction shall be at frequencies varied logarithmically from 5 to 500 cycles per second. The double amplitude of applied vibration shall be 0.036 inch at lower frequencies and shall be maintained at, but not exceed 5 g level at higher frequencies. Subsequent to vibration, the charger shall show no evidence of physical damage and shall meet the requirements of 3.5 through 3.8.

3.4.2 Shock.- The charger shall withstand a total of 6 shock impulses, 3 in each direction of 3 mutually perpendicular axes. Each shock impulse shall be a half-sine wave with a time duration of 11 ± 1 milliseconds. The peak amplitude of each shock impulse shall be 75 g's. Subsequent to shock, the charger shall show no evidence of physical damage and shall meet the requirements of 3.5 through 3.8.

3.4.3 Humidity.

3.4.3.1 Operating.- The charger shall meet the requirements of 3.5 through 3.6 when subjected to atmospheres with a relative humidity up to 95% at a temperature of 155° Fahrenheit (F) for a period of four hours.

3.4.3.2 Non-operating.- The charger shall show no evidence of physical damage or electrical failure when exposed for a 4 hour period to atmospheres of 95 percent relative humidity.

3.4.4 Storage temperature.- The charger shall withstand thermal

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:26Z
Check the source to verify that this is the current version before use.

stabilization at temperatures of -80° and +160°F. Subsequent to exposure to the storage temperatures, the charger shall show no evidence of physical damage and shall meet the requirements of 3.5 through 3.8.

3.4.5 Immersion (leakage).-The charger shall show no evidence of leakage (gas bubbles) from the sealed electronics compartment when the charger, which has been thermally stabilized a 75° ± 5°F, is completely immersed for a minimum of 12 minutes in water of 135° ± 5°F temperature and observed for the entire time period. Subsequent to immersion, the charger shall meet the requirements of 3.5 through 3.8.

3.4.6 Sand and Dust.- The charger shall be capable of withstanding 3 hours of continuous exposure to blowing sand of particle size 0.01 to 1.00 mm and blowing dust of particle size 0.001 to 0.01mm with a density between 0.1 to 0.5 gram per cubic foot of sand and a density between 0.1 to 0.5 gram per cubic foot of dust at a temperature of plus 25°C, a relative humidity between 15 to 30%, and a wind velocity of 1500 ±100 feet per minute. Subsequent to sand and dust exposure, the charger shall not have been damaged or adversely affected and shall meet the requirements of 3.5 through 3.8.

3.4.7 Fungus.- The charger shall be capable of 28 days exposure to a composite spore suspension consisting of the following cultures: (a) Chaetomium globosum, (b) Aspergillus versicalor, (c) Aspergillus spore suspension shall be incubated at an ambient temperature of between plus 77°F and plus 84°F with an RH of 97 ± 2%. Subsequent to the above fungus exposure, the charger shall not have been damaged or adversely affected and shall meet the requirements of 3.5 through 3.8.

3.4.8 Salt Spray.- The charger shall be capable of withstanding 48 hours of continuous exposure to a fine spray of 5% salt solution concentration with a specific gravity of from 1.0268 to 1.0413, a PH between 6.5 and 7.2, and a temperature between plus 93°F and plus 97°F. Subsequent to salt spray, the charger shall not have been damaged or adversely affected and shall meet the requirements of 3.5 through 3.8

3.5 Performance.- The battery charger shall meet the performance requirements of sections 3.5.1.a, 3.5.1e and 3.5.3 at all temperatures from -65°F to +155°F and it shall meet the requirements of 3.5.1.b, 3.5.1.c, 3.5.1.d and 3.5.2 at all temperatures from -25°F to 155°F.

3.5.1 Charger and Power Supply.- With 18 to 32 VDC applied to J4 and 115 ± 10 VAC (60 cycles or 400 cycles) applied to J5 the Battery Charger assembly shall:

a. Indicate by "POWER ON" lamp when the AC-DC switch is set for the applicable input voltage being utilized.

b. Supply 9 independent outputs with a constant charging current of 475ma±10% for output voltages less than the shut off voltage specified in 3.5.2.

c. Monitor the voltage at each current output and independently reduce the current to 10 ma or less when the voltage attains the shut

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:26Z
Check the source to verify that this is the current version before use.

off voltage specified in 3.5.2.

d. Indicate by the corresponding charge lamp when the voltage at all three current outputs at a charging station has attained the shut off voltage specified in 3.5.2.

e. Develop the following voltage across the loads connected to the plug labeled "OUTPUT TO RF":

(1) 26.5 ± 4.5 Vdc across a load which varies from 6 ohms to 300 ohms connected from pin A to ground when pin B is directly connected to pin C. This output shall have no transient components in excess of 1.5V peak to peak.

(2) 8.5 ± 1.0 Vdc across a load which varies from 75 ohms to 17 ohms connected from pin E to ground

3.5.2 Shut off voltage.- The output voltage at which the charging current is reduced from 475 ma to 10 ma shall conform to the limits of Table I for all input voltages from 18 to 32 Vdc with the specified resistor connected between pins E and F of the connector for each charging station.

TABLE I

Shut off voltage (Volts) ± 10%	Temperature (°F)	Resistor Ohms ± 10%
12.5	-25	1300
10.5	+75	800
10.3	+155	670

3.5.3 Input current.- To simultaneously perform the functions specified in 3.5.1.a, 3.5.1.b and 3.5.1.e, the battery charger shall require a maximum of 17 amperes with an input voltage of 18 Vdc. When the input voltage is 28 Vdc the required current shall be maximum of 10 amperes.

3.6 Electrical continuity.- The electrical wiring of the charger shall conform to the electrical wiring Drawing 10544747.

3.7 Electromagnetic compatability.- The radiated and conducted electromagnetic emissions from the battery charger shall not exceed the allowable limits of MIL-STD-461 for Class IIA equipment.

3.8 Reliability.- The charger shall exhibit a mean time between failure (MTBF) of 850 hours. A battery charger failure is defined as any malfunction which renders the charger inoperable or operable outside the limits of this specification.

QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:26Z
Check the source to verify that this is the current version before use.

as otherwise specified, the supplier may utilize his own facilities or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 General provisions.- The component and subassembly inspection requirements of MIL-F-13926 form a part of the quality assurance provisions of this specification. Definitions of inspection terms shall be as listed in MIL-STD-109.

4.2 First article (initial production) approval.- The requirements for first article approval and the responsibility (Government or contractor) for first article testing shall be as specified in the contract. The sample for first article approval tests shall consist of six (6) chargers plus three (3) each of all items covered by SQAP. The sample shall be manufactured in the same manner, using the same source of supply as used in regular production.

4.2.1 Government testing.- When the Government is responsible for conducting first article approval tests, the contractor, prior to submitting the sample to the Government, shall inspect the sample to insure that it conforms to all the requirements of the contract and submit a record of this inspection with the sample, including certificates of conformance for materials.

4.2.2 Contractor testing.- When the contractor is responsible for conducting first article approval tests, the sample shall be inspected by the contractor for all the requirements of the contract. The sample and a record of this inspection, including certificates of conformance for materials, shall be submitted to the Government for approval. The Government reserves the right to witness the contractor's inspection.

4.3 Inspection provisions.

4.3.1 Submission of product.- Unless otherwise specified by the contracting officer, inspection lot size, lot formation and presentation of lots shall be in accordance with "Submission of Product" provisions of MIL-STD-105.

4.3.2 Examination and tests.

4.3.2.1 Components and subassemblies.- All components and subassemblies shall be inspected in accordance with the inspection provisions contained in Supplementary Quality Assurance Provisions (SQAP) listed in the technical data package (TDP). In the absence of SQAP's, the applicable Quality Assurance Provisions of MIL-F-13926 shall apply. Examination and tests related to Section 3 herein shall be performed on a single defect (individual characteristic) basis in accordance with MIL-STD-105 and the sampling plans specified in Tables II, III and IV herein. Examination and tests for packaging, packing, and marking shall be in accordance with MIL-P-14232

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:26Z
Check the source to verify that this is the current version before use.

and Section 5 herein. The tabulated classification of defects in Tables II, III and IV shall constitute the minimum inspection to be performed by the supplier after first article approval and prior to Government acceptance or rejection by item or lot.

TABLE II - CLASSIFICATION OF DEFECTS

(100% INSPECTION)

		REQUIREMENT	TEST PROCEDURE
101.	Power-on indicator	3.5.1a	4.6.2.1
102.	Charging current	3.5.1b	4.6.2.2
103.	Output voltage monitor	3.5.1c	4.6.2.2
104.	Charge indicator	3.5.1d	4.6.2.2
105.	Output to rangefinder	3.5.1e	4.6.2.3
106.	Shut-off voltages	3.5.2	4.6.2.3
107.	Input current	3.5.3	4.6.2.4
108.	Electrical continuity	3.6	4.6.3

MINOR: NONE

NOTE: The tests in Table II shall be conducted at a temperature between +70° and +80°F.

4.3.3 Acceptance and rejection.- Rejected lots shall be screened for all defective characteristics. Removal or correction of defective units and resubmittance of rejected lots shall be in accordance with "Acceptance and Rejection" as specified in MIL-STD-105.

4.4 Special sampling.

4.4.1 General.- Three chargers shall be selected at random as a special sampling from each 50 produced. The samples shall meet the requirements and tests in Table III.

TABLE III

NO.	CHARACTERISTIC	REQUIREMENT	TEST PROCEDURE
301.	Materials	3.1	Applicable Dwgs & Specs - Visual
302.	Fabrication	3.2	Applicable Dwgs & Specs - Visual
303.	General specifications	3.3	MIL-F-13926, MIL-P-46843, Visual

NOTE: The tests in Table III shall be conducted at a temperature between +70° and +80°F.

4.4.2 Environmental.- Three chargers shall be selected at random as samples from each 50 produced, or from each month's production, whichever

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:26Z
Check the source to verify that this is the current version before use.

occurs first. Each sample shall be subjected to the tests in Table IV and shall then meet the requirements and tests on Table II.

TABLE IV

NO.	CHARACTERISTIC	REQUIREMENT	TEST PROCEDURE
304.	Vibration	3.4.1	4.6.1.4
305.	Shock	3.4.2	4.6.1.3
306.	Humidity, Operating	3.4.3.1	4.6.1.5
307.	Humidity, non-operating	3.4.3.2	4.6.1.6
308.	Storage temperature	3.4.4	4.6.1.1
309.	Immersion	3.4.5	4.6.1.7
310.	Sand and dust	3.4.6	4.6.1.8
311.	Salt spray	3.4.8	4.6.1.10
312.	Operation (-65°F, -25°F, +155°F)	3.5 through 3.6	4.6.1.2, 4.6.2 through 4.6.3
313.	Electromagnetic compatability	3.7	4.6.4

4.4.3 Failure of sample.- Should any item of a special sampling fail to meet the specified test requirements, acceptance of the represented inspection lot shall be suspended by the Government until necessary corrections have been made by the contractor and resubmitted samples have been approved (see 4.3.3).

4.5 Inspection equipment.- Except as otherwise provided for by the contract, the contractor shall supply and maintain inspection equipment in accordance with the applicable requirements of MIL-I-45607.

4.5.1 Government furnished inspection equipment.- Where the contract provides for Government furnished test equipment, supply and maintenance of test equipment shall be in accordance with applicable requirements specified in MIL-I-45607.

4.5.2 Contractor furnished inspection equipment.

4.5.2.1 Government design.- All inspection equipment specified by drawing number in specifications or SQAP forming a part of the contract shall be supplied by the contractor in accordance with technical data included in the technical data package list.

4.5.2.2 Contractor design.- The contractor shall design and supply inspection equipment compatible with the "Test Methods and Procedures" specified in 4.6 of this specification and with the component inspection procedures specified in "Examination" and "Test Facilities" requirements of MIL-F-13926. Since tolerance of test equipment is normally considered to be within 10% of the product tolerance for which it is intended, this inherent error in the test equipment design must be considered as part of the prescribed product tolerance limit. Thus, concept, construction, materials, dimensions and tolerances used in the design of test equipment shall be so selected and controlled as to insure that the test equipment will reliably indicate acceptability of a product which does not exceed 90% of the prescribed tolerance limit, and permit positive rejection when non-conforming. Construction shall be such as to facilitate routine calibration of test equipment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:26Z
Check the source to verify that this is the current version before use.

4.5.3 Test equipment.- In conjunction with 4.5.2.2 the following standard test equipment shall be utilized in the performance of the applicable tests specified in 4.6:

	NOMENCLATURE		DESCRIPTION
1.	Ammeter DC	3 req'd	Capable of reading 525 ma. with 1% accuracy
2.	Ammeter DC	1 req'd	Capable of measuring currents up to 20 amperes
3.	Voltmeter DC	3 req'd	20,000 ohms/volt sensitivity Capable of reading 15V with 1% accuracy
4.	Voltmeter DC	1 req'd	20,000 ohms/volt sensitivity Capable of measuring to 30V with 1% accuracy
5.	Oscilloscope	1 req'd	0.5 volt/cm sensitivity, input impedance greater than 10 megaohms with probe and horizontal sweep 1 micro sec/cm
6.	Power Source	1 req'd	Capable of supplying 18-32 VDC at currents up to 20 amperes
7.	Power Resistors (fixed value) 2 req'd		6 ohms, 75 w 1 ea 300 ohms, 10 w 1 ea
8.	Power Resistors (variable) 2 req'd		0 to 300 ohms - 10 watts
9.	Variable Resistors 3 req'd		0 to 30 ohms - 6 watts

4.6 Test methods and procedures.

4.6.1 Environmental.- The charger shall be thoroughly examined for physical defects after each environment test. A visual and tactile examination shall be made for missing parts and physical damage. During the test specified in 4.6.1.5 and upon completion of all other environmental tests, the charger shall be subjected to performance tests specified in 4.6.2 through 4.6.3.

4.6.1.1 Storage temperatures.- The test equipment utilized in this test shall be in accordance with the "Test Facilities" requirements of MIL-F-13926. The test shall be performed as specified in Procedure II of MIL-F-13926 at the temperatures specified in 3.4.4.

4.6.1.2 Operational temperatures.- The test shall be performed in accordance with Procedure II of MIL-F-13926 at the extreme temperatures specified 3.5 utilizing the test equipment indicated in 4.6.1.1. The charger shall be exposed to each specified temperature for a minimum period of 2 hours. At the end of each 2 hour period, and while still at the specified temperature, the charger shall be tested in accordance with 4.6.2 through 4.6.3.

4.6.1.3 Shock.- The test equipment utilized in this test shall be in accordance with the "Test Facilities" requirements of MIL-F-13926. The test shall be performed as specified in Procedure II of MIL-F-13926 except the shock pulse shall comply with the waveform, time dureation and peak "G" value specified in 3.4.2.

4.6.1.4 Vibration.- The charger shall be positioned as specified in 3.4.4 and firmly mounted to the vibration tester. The charger shall be subjected to Test Method 514, Procedure I, Part I of MIL-STD-810, except that the acceleration, amplitude, frequency, and time duration shall be as specified in 3.4.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:26Z
Check the source to verify that this is the current version before use.

4.6.1.5 Humidity-operating.- This test shall be conducted in accordance withProcedure I of MIL-F-13926, except that the temperature shall be increased to 155°F, the charger shall be subjected to the tests in 4.6.2 through 4.6.4 at the end of the 4 hour period at 155°F, and the charger shall be subjected to one twelve hour humidity cycle. The charger shall conform to the requirements of 3.4.3.1.

4.6.1.6 Humidity-non-operating.- This test shall be conducted simultaneous with 4.6.1.5. At the completion of the humidity cycle the charger shall be air dried and inspected for physical damage or electrical failure. The charger shall conform to the requirements of 3.4.3.2.

4.6.1.7 Immersion (leakage).- The test shall be performed in accordance with the immersion test defined in Procedure I of MIL-F-13926, except that immersion shall be maintained at the conditions specified in requirement 3.4.5 for a minimum period of two minutes. When observing the charger during this time period, there shall be no evidence of bubbles from that part of the charger that incloses the electronic circuits.

4.6.1.8 Sand and dust.- The sand and dust test shall be performed as outlined in MIL-STD-202, Method 110, with the following conditions: The sand and dust particle sizes, density, wind velocity, temperature, time duration and relative humidity shall be as specified in 3.4.6.

4.6.1.9 Fungus.- One (1) charger shall be subjected to the fungus test outlined in MIL-F-13926. At the end of the 28 day incubation period, the charger shall be tested as specified in 4.6.2 for compliance with 3.5. Subsequent acceptance of the charger shall be by certification.

4.6.1.6 Salt spray.- The salt spray test shall be performed as outlined in MIL-STD-202, Method 101, Condition B.

4.6.2 Performance.- Conduct the tests of 4.6.2.1 through 4.6.2.4 with the environmental conditions specified in 3.5 with the input voltages specified in 3.5.1 applied to J4 (Pin A (+), Pin B (-), and J5 respectively.

4.6.2.1 Power On Indicator.- Set the AC-OFF-DC power switch to the DC Position. The indicator lamp located behind the switch shall light. Set the switch to the AC Position. The indicator lamp shall light. Set the switch to the off position. The lamp shall not be lighted.

4.6.2.2 Charging Current. Select the proper resistance from Table I for the ambient temperature and connect the test fixture (Fig 1) to one of the charging station output cables and set the variable resistance to 0 ohms. Set the power switch to the DC position. Each ammeter shall read 475 ma±10% and each voltmeter shall read 0 V. Increase the variable resistance VRI and observe a corresponding increase in the voltmeter reading with the ammeter reading remaining within the specified limits. As the reading on the voltmeter attains that value specified in 3.6.2, observe that the ammeter reading is reduced below 10 ma. Increase VR2 and VR3 and observe similar results on the corresponding ammeter and voltmeter. When the reading on all three ammeters has been reduced below

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:26Z
Check the source to verify that this is the current version before use.

10 ma, observe that the indicator lamp located above that charging station shall light. Repeat this procedure for the remaining charging stations. Repeat the entire procedure above but set the AC-OFF-DC switch to the AC position.

4.6.2.3 Output for Range finder.- Connect the test fixture (Fig 2) to the connector labeled "OUTPUT FOR RF." Adjust the variable resistors VR1 and VR2 to 0 ohms and set the input voltage to 18.0 + 0.1 Vdc. Set the AC-OFF-DC switch to the DC position. Observe voltmeter readings of 8.5 ± 0.1 Vdc on V_1 and 26.5 ± 4.5 Vdc on V_2. Adjust variable resistors VR1 and VR2 to 58 ohms and 294 ohms respectively. Observe that the voltmeter readings remain within the specified limits. Repeat the above procedure with 32.0 ± 0.1 Vdc applied. Repeat the above procedure with the AC-OFF-DC switch set to the AC position.

4.6.2.4 Input current.- Connect an ammeter in series with the DC Input to the battery charger. At each charging station output, connect pins A, B and C to pin D of each connector and connect the appropriate resistance between pins E and F. Connect the test fixture (Fig 2) to the connector marked "OUTPUT FOR RF" and set VR1 and VR2 of this test fixture to 0 ohms. Set the AC-OFF-DC switch to the DC position. Adjust the DC input to 18.0 ± 01V and observe an ammeter reading which does not exceed 17 amperes. Adjust the DC input to 28.0 ± 0.1V and observe that the ammeter reading does not exceed 10 amperes.

4.6.3 Electrical continuity.- A continuity test of the charger shall be made utilizing standard measuring equipment to determine conformance to the electrical wiring drawings specified in 3.6.

4.6.4 Electromagnetic compatability.- The test shall be performed in accordance with the test requirements of MIL-STD-461 for Class IIA equipment.

4.6.5 Reliability.- Reliability testing is required to be performed in conjunction with First Article Testing. The reliability sample shall consist of 6 chargers, and a minimum of 400 operating hours shall be accumulated on each charger during reliability testing for conformance to 3.8. The chargers shall be operated at Standard Ambient Temperature (75 ± 5°F) from a suitable power source in the following cycle sequence:

a. Charging Mode: Charging 3 batteries (dummy loads may be substituted for batteries) 20 hours.

b. Ranging Mode: Supply power to range finder for ranging operations (a dummy load simulating a rangefinder may be substituted, and operated continuously) 10 hours for each type voltage input to charger.

1. 18 - 32 Vdc
2. 115 ± 10 VAC 60 cps
3. 115 ± 10 VAC 400 cps

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:26Z
Check the source to verify that this is the current version before use.

c. Combined charging and ranging mode (combine mode 1 and mode 2 above) 30 hours.

At the completion of the standard ambient temperature test the charger shall be conditioned at -65°F and the charger shall be operated in the ranging mode. After completion of this -65°F test the chargers shall be conditioned at -25°F and the cyclic sequence shall be performed. At the completion of the -25°F test the chargers shall be conditioned at 155°F and the cyclic sequence performed. The chargers shall be conditioned at standard room ambient temperature and the cyclic sequence shall be repeated until the following relationship is satisfied:

$$850 \leq \frac{2T}{\chi^2_{.05,\ 2(r+1)}}$$

where T = operating time

$\chi^2_{.05,\ 2(r+1)}$ = Chi Square value

r = number of failures

2(r+1) = degrees of freedom

Data collected shall include total operating time, time each failure occurred, type of failure, time to correct the failure, and corrective action taken to allow resumption of testing.

A failure is defined as any malfunction which renders the charger operative or inoperative outside the limits of this specification. NOTE: The dummy load for the batteries must simulate batteries being charged in order that the functions of the charger are demonstrated during these tests.

5. PREPARATION FOR DELIVERY

5.1 Packaging, packing, and marking.- Packaging, packing, and marking shall be in accordance with Packaging Data Sheet 10541243. The level of protection shall be as specified in the procurement document.

6. NOTES

6.1 Intended use.- The battery charger is used to charge one to three batteries 10541198, independently of each other and to furnish the necessary power to operate the Laser Range Finder, AN/GVS-3 at ambient temperatures below -25°F.

6.2 Ordering data.- Procurement documents should specify:

a. Title, number and date of this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:26Z
Check the source to verify that this is the current version before use.

b. Selection of an applicable level of preservation, packaging, and packing.
c. Applicable packaging data sheet (see 5.1).
d. Provisions for first article testing.

Custodian:


Army - MU

Preparing activity:

Army - MU

Project No. 1240-A162


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:26Z
Check the source to verify that this is the current version before use.

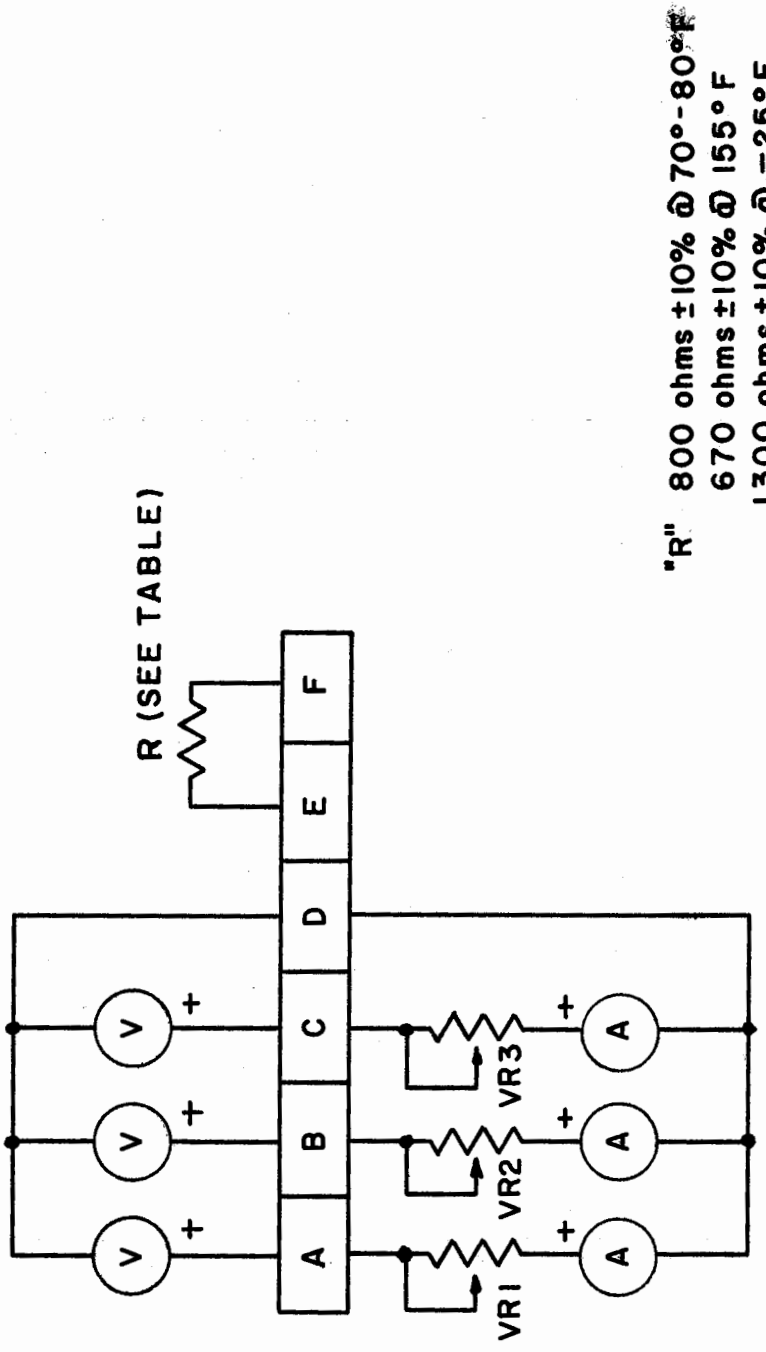

TEST CIRCUIT, BATTERY CHARGING OUTPUTS

FIG. 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:26Z
Check the source to verify that this is the current version before use.

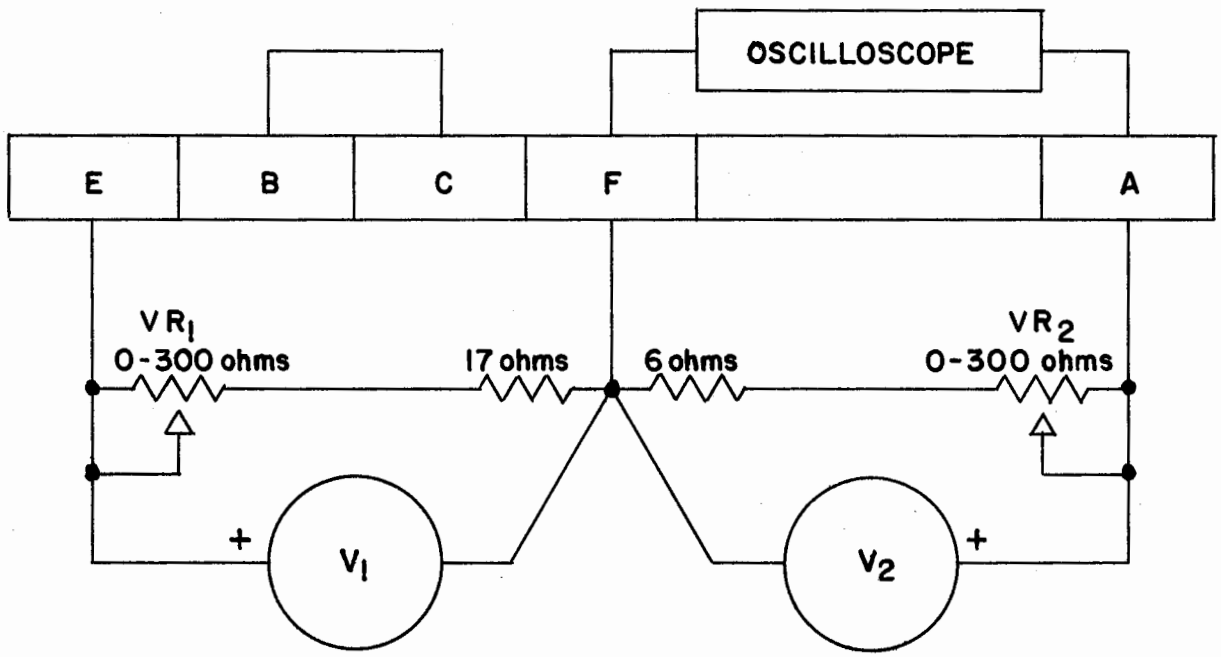

TEST CIRCUIT, OUTPUT TO R.F.

FIG. 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:26Z
Check the source to verify that this is the current version before use.