
INCH-POUND
MIL-C-55302/140B
17 November 1988
SUPERSEDING
MIL-C-55302/140A
18 December 1984

MILITARY SPECIFICATION SHEET

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES: PLUG WITH PIN CONTACTS, 2 KEYING PINS, FOR PRINTED WIRING BOARDS (.100 INCH SPACING)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the connectors described herein shall consist of this specification and the latest issue of MIL-C-55302.

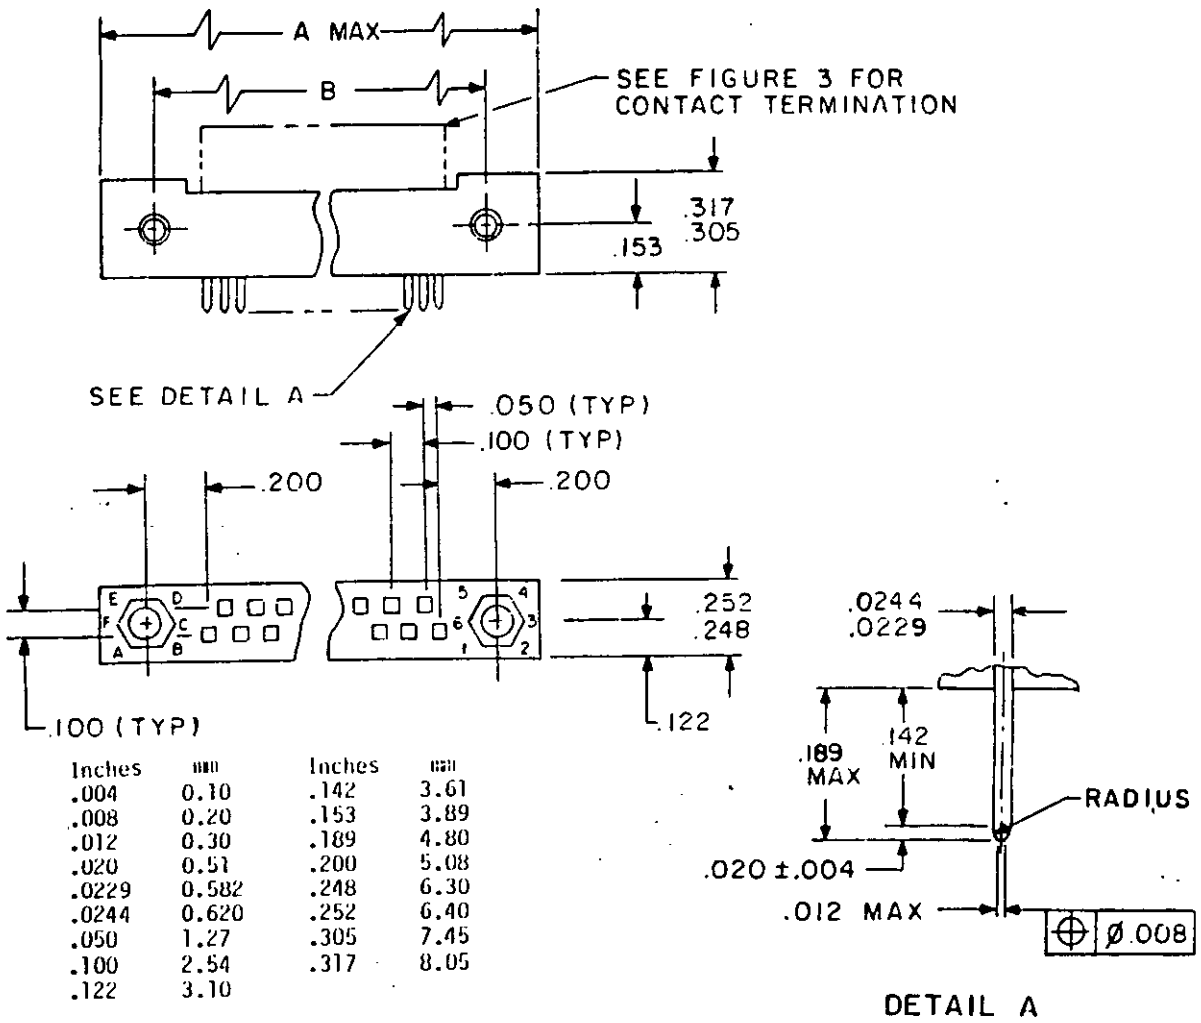

Inches	mm	Inches	mm
.004	0.10	.142	3.61
.008	0.20	.153	3.89
.012	0.30	.189	4.80
.020	0.51	.200	5.08
.0229	0.582	.248	6.30
.0244	0.620	.252	6.40
.050	1.27	.305	7.45
.100	2.54	.317	8.05
.122	3.10		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.005 (0.13 mm).

FIGURE 1. Connector, plug (.100 inch spacing).

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:52Z
Check the source to verify that this is the current version before use.

TABLE I. Arrangements and characteristics.

Contact arrangement	No of contacts	Dimensions (inches) A MAX	B ±.006
M55302/140A	17	1.516 (38.50)	1.200 (30.48)
M55302/140B	29	2.114 (53.70)	1.800 (45.72)
M55302/140C	33	2.314 (58.80)	2.000 (50.80)
M55302/140D	41	2.716 (69.00)	2.400 (60.96)
M55302/140E	53	3.315 (84.20)	3.000 (76.20)
M55302/140F	65	3.917 (99.50)	3.600 (91.44)


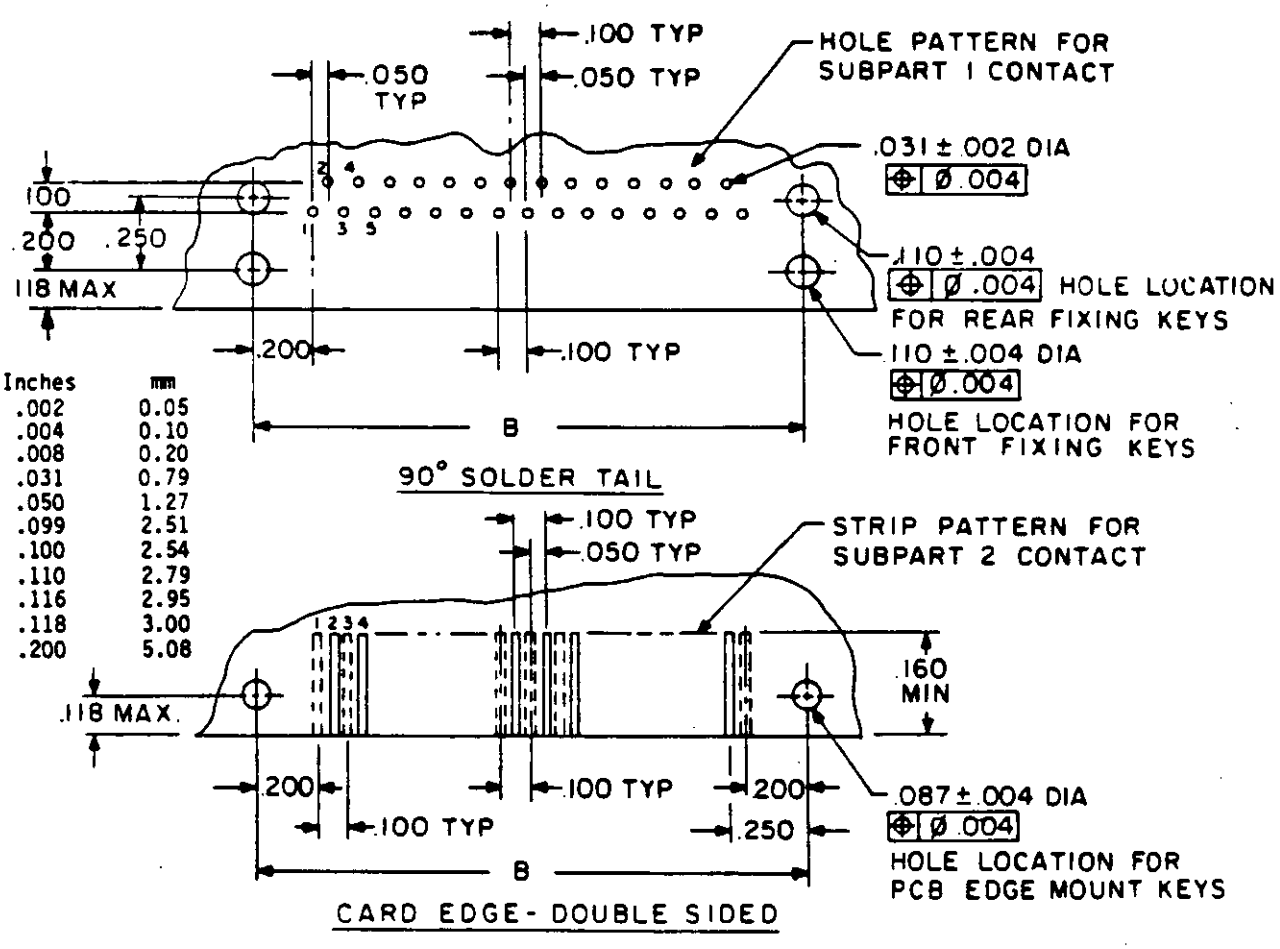


FIGURE 2. Recommended hole patterns.


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:52Z
Check the source to verify that this is the current version before use.

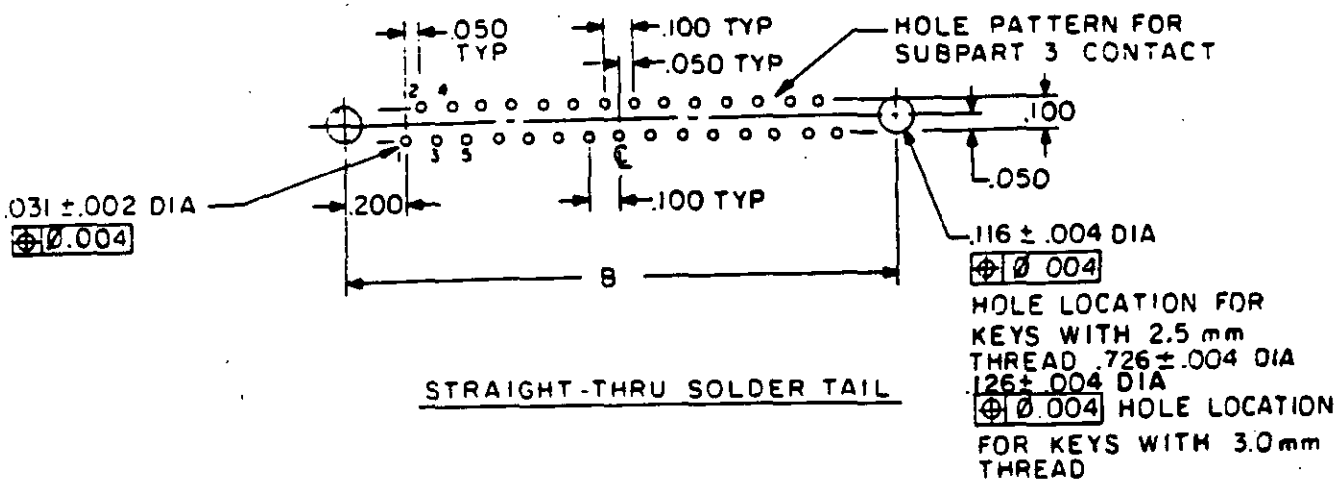


NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.005 (0.13 mm).
4. Metric equivalents are in parentheses.

FIGURE 2. Recommended hole patterns - Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:52Z
Check the source to verify that this is the current version before use.




Part number
M55302/140A

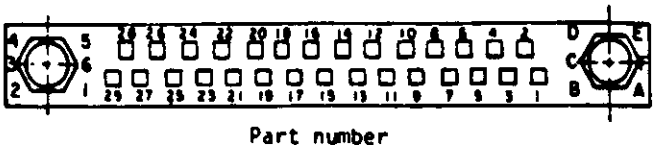


Part number
M55302/140B

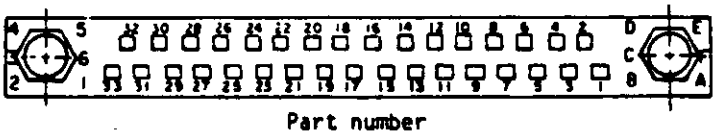


Part number
M55302/140C

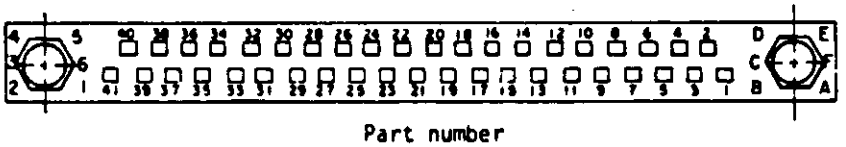

Part number
M55302/140D

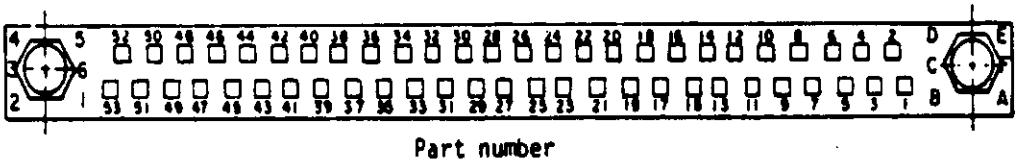


Part number
M55302-140E

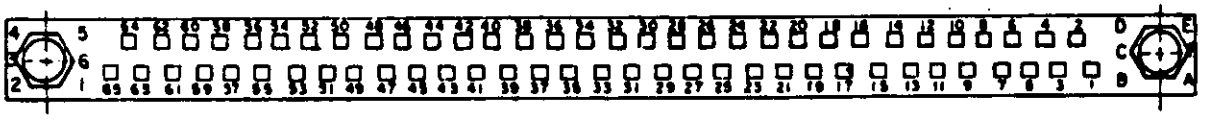

Part number
M55302/140F

FIGURE 3. Contact arrangements and keying arrangements.


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:52Z
Check the source to verify that this is the current version before use.

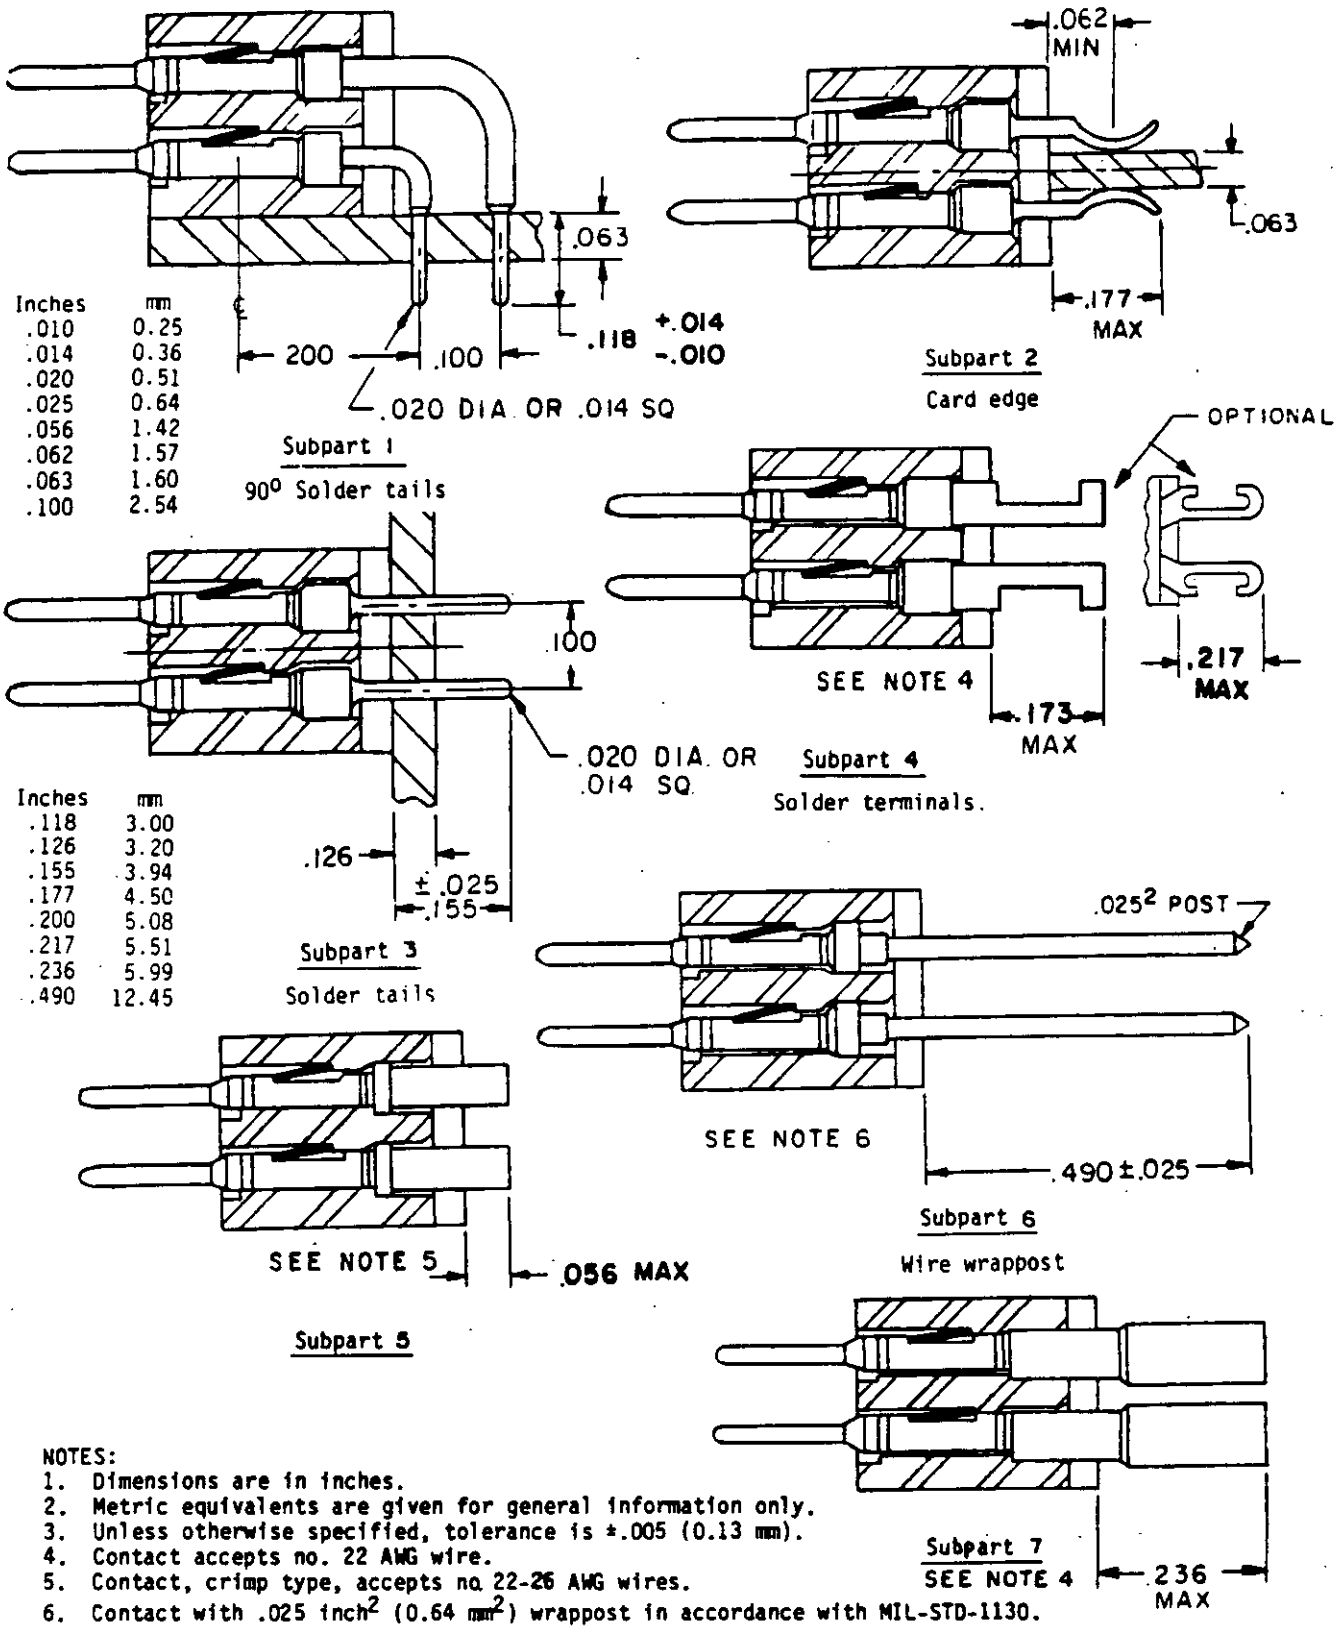


NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.005 (0.13 mm).
4. Contact accepts no. 22 AWG wire.
5. Contact, crimp type, accepts no. 22-26 AWG wires.
6. Contact with .025 inch^2 (0.64 mm^2) wrappost in accordance with MIL-STD-1130.

FIGURE 4. Connector terminations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:52Z
Check the source to verify that this is the current version before use.

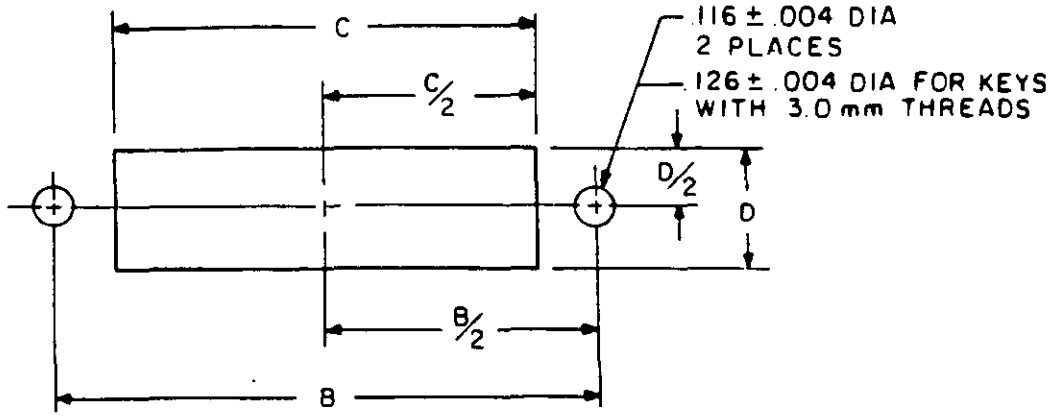

FIXED MOUNT

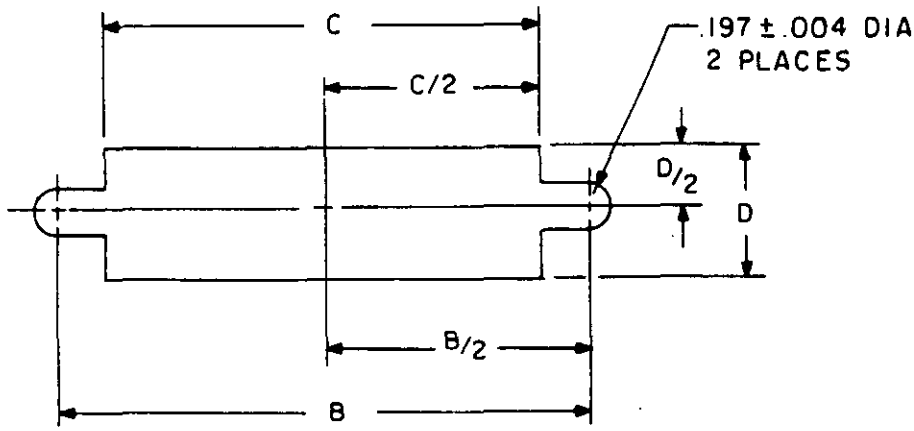

FLOATING MOUNT

Number of Contacts	17	29	33	41	53	65
B ±.008 (±0.20)	1.200 (30.48)	1.800 (45.72)	2.000 (50.80)	2.400 (60.96)	3.000 (76.20)	3.600 (91.44)
C Min.	1.020 (25.91)	1.618 (41.10)	1.819 (46.20)	2.221 (56.41)	2.819 (71.60)	3.422 (86.92)
D Min.	.374 (9.45)	.374 (9.45)	.374 (9.45)	.374 (9.45)	.374 (9.45)	.374 (9.45)

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.005 (0.13 mm).
4. Metric equivalents are in parentheses.
5. Floating mount panel thickness .085 (2.16 mm) maximum.

FIGURE 5. Recommended panel cutouts.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:52Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figures 1 through 5 and table I.

Contact identification: See figure 3.

Contact retention: 4 pounds minimum for each contact.

Contact engagement: 0.7 ounce minimum, 3.6 ounces maximum.

Contact separation: 0.7 ounce minimum, 3.6 ounces maximum.

Contact resistance: The contact resistance shall not exceed 12 milliohms.

Dielectric withstanding voltage:

Sea level: 1,000 V rms, 60 Hz.

High altitude: 300 V rms, 60 Hz.

Current rating, maximum: 3.0 amperes at 25°C.

Keying pin: Two hexagonal keyed guides provide 36 polarizing positions. Keys are constructed in accordance with M55302/154. Connectors are supplied with hex pins in the "1" and "A" positions, except for 1/4-turn locking styles, which are keyed in "F" and "6" positions. When required, connectors can be easily keyed to the desired position by using a standard wrench or screwdriver.

Crimping tools:

Basic tool: M22520/2-01.

Positioner: M22520/2-36.

Removal tool (for crimp contacts): See M81969/40-01.


Hood types: See MIL-C-55302/155.

Mounting hardware: See MIL-C-55302/154, table I, plug.

Mating connectors: Shall conform to MIL-C-55302/142.

Part number: Consists of the letter M, the basic number of the specification sheet, and a dash number compiled as follows:

Example:

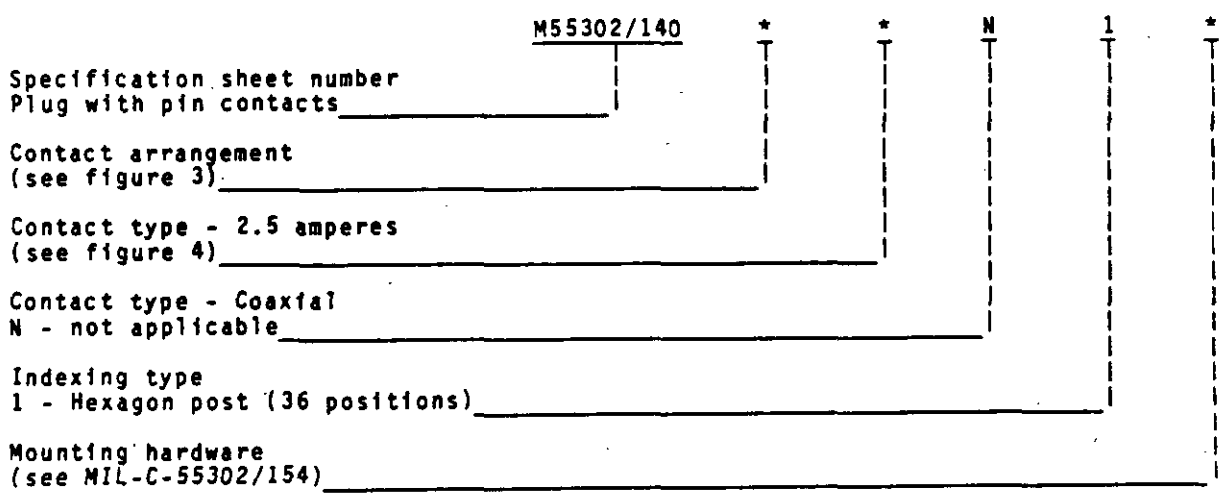

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:52Z
Check the source to verify that this is the current version before use.

NOTE: Revision letters are not used to denote changes due to the extensiveness of the changes.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 17

Review activities:
Army - AR, AT, AV, MI
Navy - AS, OS, SH
Air Force - 11, 85, 99
DLA - ES

User activities:
Army - ME
Navy - MC
Air Force - 19

Preparing activity:
Army - CR

Agent:
DLA - ES

(Project 5935-3652-01)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:52Z
Check the source to verify that this is the current version before use.